




Concept Pro

8MP	2.7-13.5mm Motorised Lens	30M IR	IP
------------	--	-------------------	-----------

CVP9329DLIREL-IP8M-Z CVP9329DLIREL-IP8M-Z-G

Concept Pro 8MP IP Deep Learning Motorised External Eyeball Camera

The CVP9329DLIREL-IP8M-Z model is an IP camera that has been designed to deliver the highest image quality for external environments. This external eyeball features a motorised lens, smart infrared LEDs with 30m illumination range, and provides crisp 8-megapixel video. It comes equipped with alarm and audio functionality as well as a power output for the most advanced installation needs. This camera is also designed for excellent compatibility with the Concept Pro range of network video recorders.




Deep Learning Video Analytics

Reduce false motion detection alarms by up to 95% using new Deep Learning technology. Trained with powerful deep learning algorithms, the camera can detect and classify human, car, and bicycles based upon specific line/zone and timing criteria. As a result, false alarms from sources such as lights, animals, foliage, weather, and other objects are effectively filtered and reduced. Additionally, this camera supports Deep Learning Motion Detection with human/car/bike classification to reduce false alarms on traditional motion detection events.



Intelligent, Efficient Bit Rate Control

Reduce camera streaming bit rates by up to 90% by using Variable Bit Rate (VBR) or VBR+ smart bit rate control settings. These dynamic features maximise overall image quality while minimising camera stream bit rates. This results in lower network bandwidth usage and extended recording storage retention time.



DC12V Power Output

This CCTV camera also provides a DC12V 100mA power output that can be conveniently used to power some auxiliary equipment rather than using a separate power supply adapter.

KEY FEATURES

- ◆ Max. 20FPS @ 8MP
- ◆ 2.7-13.5mm Motorised Lens
- ◆ Up to 30m Smart IR Illumination
- ◆ Deep Learning Video Analytics
- ◆ H.265 Video Codec & VBR+ Smart Bit Rate Control
- ◆ Alarm & Audio I/O

OTHER FEATURES

- ◆ PoE/DC12V/AC24V Power Input & DC12V Power Output
- ◆ True WDR, ATW, BLC, Defog, 3D-DNR
- ◆ Manual Regions of Interest
- ◆ ONVIF Profile S Compliant

COMPATIBLE WITH



CONCEPT PRO
IP RECORDING
RANGE

CVP9329DLIREL-IP8M-Z CVP9329DLIREL-IP8M-Z-G

Concept Pro 8MP IP Deep Learning
Motorised External Eyeball Camera


Concept  Pro

SPECIFICATION

Model/Feature	CVP9329DLIREL-IP8M-Z CVP9329DLIREL-IP8M-Z-G	
Video Output Type	IP	
Image Sensor	1/2.8" Progressive Scan CMOS	
Signal System	PAL/NTSC	
Min. Illumination	Enhanced Low Light Performance Colour: 0.003 Lux @ (F1.4, AGC ON) B&W: 0 lux with IR LEDs on	
Camera	Electronic Shutter	Auto/Manual, 1/25 to 1/5,000s
	S/N Ratio	≥48.8dB
	IR LEDs	x4
	IR Illumination Range	Max. 30m
	IR Control	Auto/Off
	Adaptable IR	Auto
	Pan/Tilt/Rotation Range	Pan: 0°-360°, Tilt: 0°-90°, Rotation: 0°-360°
	Lens Type	Motorised
	Mount Type	Built-in
	Focal Length	f=2.7-13.5mm
Lens	Aperture	F1.4
	Angle of View	H: 94.9-28.5°, V: 86.2-17.6°, D: 121.5-33.6°
	Focus	Auto/Manual
	Iris	DC Auto Iris
Compression	H.265/H.264 with VBR+ Smart Codec Option	
Streaming Capability	Triple Streaming + SVC Stream	
Video	Resolution	3840x2160, 2592x1944, 2592x1520, 2304x1296, 2048x1536, 1920x1080, 1280x1024, 1024x768, 1280x720, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
	Frame Rate	Stream 1: Max. 20FPS @ 3840x2160 Stream 2: Max. 20FPS @ 640x480 Stream 3: Max. 20FPS @ 640x480
	Bit Rate Control	CBR/VBR/VBR+
	Bit Rate	Stream 1: 1,000-8,000kbps Stream 2: 600-2,000kbps Stream 3: 600-2,000kbps
	Day/Night	True D&N with ICR (Auto/Day/Night/Schedule)
	Backlight Compensation	Yes
	Wide Dynamic Range	True WDR
	White Balance	ATW/Manual (Indoor/Fluorescent/Outdoor)
	Gain Control	Auto
	Noise Reduction	3D-DNR (Auto/Manual)
Network	Region of Interest	Manual (Max. 8 Regions)
	Defog	Yes
	Slow Shutter	Off/X2/X4/X8
	Image Setting	Mirror/Flip
	Image Adjustment	Brightness, Contrast, Colour, Sharpness
	Privacy Masking	Yes (Max. 4 Areas)
	Motion Detection	Yes (Max. 4 Areas)
	Tamper Detection	Yes
	Deep Learning Motion Detection	Yes (Human Detection)
	Deep Learning Video Analytics	Yes (Human/Vehicle/Bike Classification; Intrusion, Line Crossing, Region Enter/Exit, Loitering, Stopping, Counter Detection) *Compatible with select Concept Pro NVRs
Interface	Transmission Distance	Max. 100m over Ethernet
	Ethernet	RJ45 10M/100M Ethernet x1
	Protocol	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, SMTP, FTP, UPnP, HTTP, HTTPS, SSL/TLS
	Interoperability	ONVIF Profile S, HTTP/RTSP API
	ONVIF Channels	Max. 4 Streams
	Streaming Method	Unicast/Multicast
	Max. User Access	x10
	Edge Storage	MicroSD (Snapshot), Local PC (Snapshot/Recording)
	Video Interface	-
	Alarm Interface	Alarm In x1, Alarm Out x1
General	Audio Interface	Audio In x1, Audio Out x1
	Audio Compression	G.711u-law (8kHz)
	RS-485	-
	Control Protocol	N/A
	Reset Button	Yes
	Power Supply	PoE/DC12V/AC24V
	Power Consumption	TBD
	Power Output	DC12V (Max. 100mA)
	Operating Temperature	-20°C to +50°C
	Operating Humidity	0% to 90%
Certification	Ingress Protection	IP66
	Vandal Resistance	-
	Housing Materials	Aluminum Diecasting
	RAL	CVP9329DLIREL-IP8M-Z: RAL 9010 Pure White CVP9329DLIREL-IP8M-Z-G: RAL 7021 Black Grey
	Dimensions	Ø120mm x (H) 105.5mm
	Net Weight	≈550g
	Gross Weight	≈650g
	Certifications	CE

DIMENSIONS

All measurements are in mm.

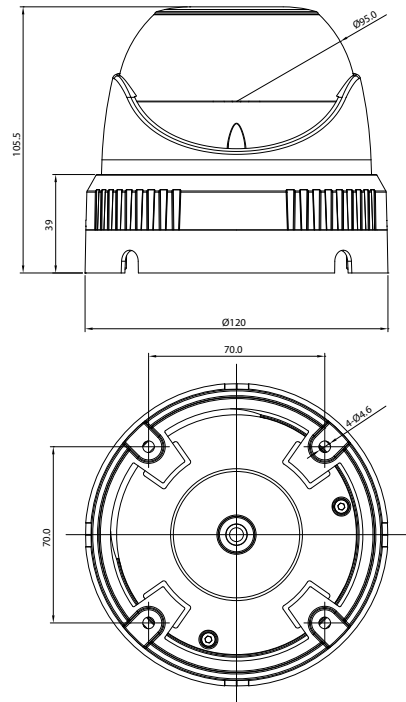

ORDER CODE

- **CVP9329DLIREL-IP8M-Z** Concept Pro 8MP IP Deep Learning Motorised External Eyeball Camera
- **CVP9329DLIREL-IP8M-Z-G** Concept Pro 8MP IP Deep Learning Motorised External Eyeball Camera (Black Grey)

OTHER PRODUCTS IN THE RANGE

- **CVP9329DEIREL-IP5M-Z** Concept Pro 5MP IP Enhanced Low Light Motorised External Eyeball Camera
- **CVP9329DEIREL-IP5M-Z-G** Concept Pro 5MP IP Enhanced Low Light Motorised External Eyeball Camera (Black Grey)

RECOMMENDED ACCESSORIES

- **CP-BASE-1-V2** Concept Pro Small Junction Box
- **CP-BASE-1-V2-G** Concept Pro Small Junction Box - Black Grey
- **CP-WM-1-V2** Concept Pro Small Wall Mount
- **CP-WM-1-V2-G** Concept Pro Small Wall Mount - Black Grey
- **CP-PM-1-V2** Concept Pro Small Pendant Mount
- **CP-PM-1-V2-G** Concept Pro Small Pendant Mount - Black Grey
- **CP-PLM-V2** Concept Pro Pole Mount
- **CP-CM-V2** Concept Pro Corner Mount
- **CAT6-305 305m** CAT6 Cable (Green)
- **VA-SW4/8/16POE-IP** 4/8/16 Channel PoE Switch

COMPATIBLE
WITH



CONCEPT PRO
IP RECORDING
RANGE

CVP9329DLIREL-IP8M-Z CVP9329DLIREL-IP8M-Z-G




Concept Pro 8MP IP Deep Learning
Motorised External Eyeball Camera

ACCESSORIES

DIMENSIONS


CP-BASE-1-V2 CP-BASE-1-V2-G

Concept Pro Small
Junction Box

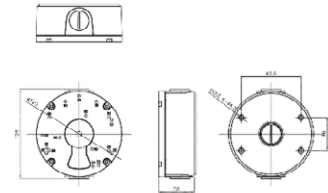



CP-PM-1-V2 CP-PM-1-V2-G

Concept Pro Small
Pendant Mount




CP-WM-1-V2 CP-WM-1-V2-G

Concept Pro Small
Wall Mount

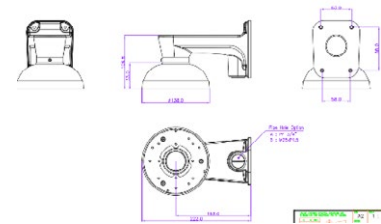

CP-PLM-V2

Concept Pro Pole Mount
(can be combined with
CP-BASE-1-V2)

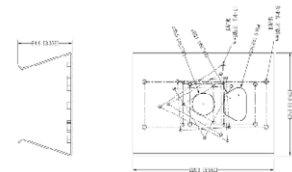

CP-CM-V2

Concept Pro Corner Mount
(can be combined with
CP-BASE-1-V2)

