

# DATA SHEET

T6 Range - up to 6 persons

Suitable for a small-medium house up to 6 persons.



Why use a

BIODIGESTER

sewage systems for the modern world

- Simple process
  - Quiet operation
- Simple installation
  - No concrete back fill required in dry ground
- Simple maintenance
  - No moving parts underground

Installation is simple in areas with a high water table -

just cover the anchors with 3m³ concrete.

## Performance

The plant is designed to produce an effluent quality

- of: BOD 5 20mg/l
  - Suspended Solids 30mg/l
  - Ammoniacal Nitrogen (as N) 20mg/l

More stringent effluent qualities may also be catered for. The effluent can be discharged to a watercourse or via a soakaway, subject to approval.

Sewage flow/day 1.2 m<sup>3</sup>

#### What size do I need?

sizing formula (normal residential use):

#### **England and Wales:**

1 person per bedroom

+ 0.5 person per house

(so a 4-bedroomed house would be considered as 4.5 people)

#### Scotland:

1 person per bedspace

## Environmental Regulations

BIODIGESTER conforms to all the normal 'Consent to Discharge' environmental requirements of the relevant authorities in the United Kingdom.

## Building Regulations


Building Regulations relevant to a BIODIGESTER sewage treatment plant:

The Building Regulations 2000 Drainage and Waste Disposal 2002 edition Part H-H2 Package Sewage treatment Works

www.biodigester.com Tel: 01278 786104



## MODEL T6S1 BIODIGESTER

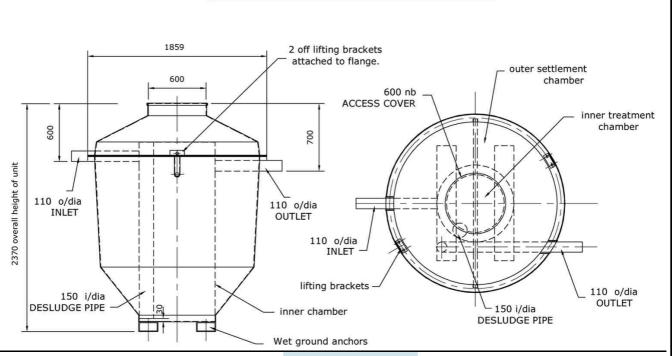

#### **T6 References:**

T6 standard	inlet drain depth	600mm	ref T6S1
T6 standard	inlet drain depth	900mm	ref T6S2
T6 standard	inlet drain depth	1200mm	ref T6S3
T6 standard	inlet drain depth	1500mm	ref T6S4
T6 integral pumping station	inlet drain depth	600mm	ref T6P1
T6 integral pumping station	inlet drain depth	900mm	ref T6P2
T6 integral pumping station	inlet drain depth	1200mm	ref T6P3
T6 integral pumping station	inlet drain depth	1500mm	ref T6P4

# Dimensions: T6S1

1860 mm wide 2370 mm deep 600 mm inlet drain depth weight: 100 kg

#### T6 Electrical Ratings:

Air Blower: 240v 84w Start current 0.47 amps
Integral pump: 240v 150w Start current 2.9 amps

## T6 Integral Pump Flow:

150 litres/min max head: 5.2m max pipe size 32mm

To calculate running cost, see www.energyfirst.org/runningcosts.htm

# Extras available for your T6 BIODIGESTER

SAMPLE CHAMBER

When discharging to a soakaway it is a requirement that you install a sample chamber so that the effluent quality can be periodically checked. Available to suit all outlet depths of our standard range.

INTEGRAL EFFLUENT PUMP

In areas where you might have a high water table, or not enough space for a soakaway, the treated effluent can be pumped to a suitable point of discharge. The pump is 240 volt, submersible with an integrated float. It is fitted internally.

## HIGH LEVEL ALARM

If you are relying on a pump to discharge the effluent, it is important to install a warning beacon to alert to failure. This is a flashing beacon with a float switch for installing within the pump chamber.

REMOTE REPORTING

You can be alerted by text to your mobile phone if any problems occur with your unit. Our new remote reporting system is based on mobile phone technology. Contact us for further details.



Burnham Environmental Svcs. Ltd.

27 Brightstowe Road Burnham on Sea, Somerset TA8 2HW United Kingdom

Fax: 01278 793380

Email: sales@biodigester.com

Tel: 01278 786104