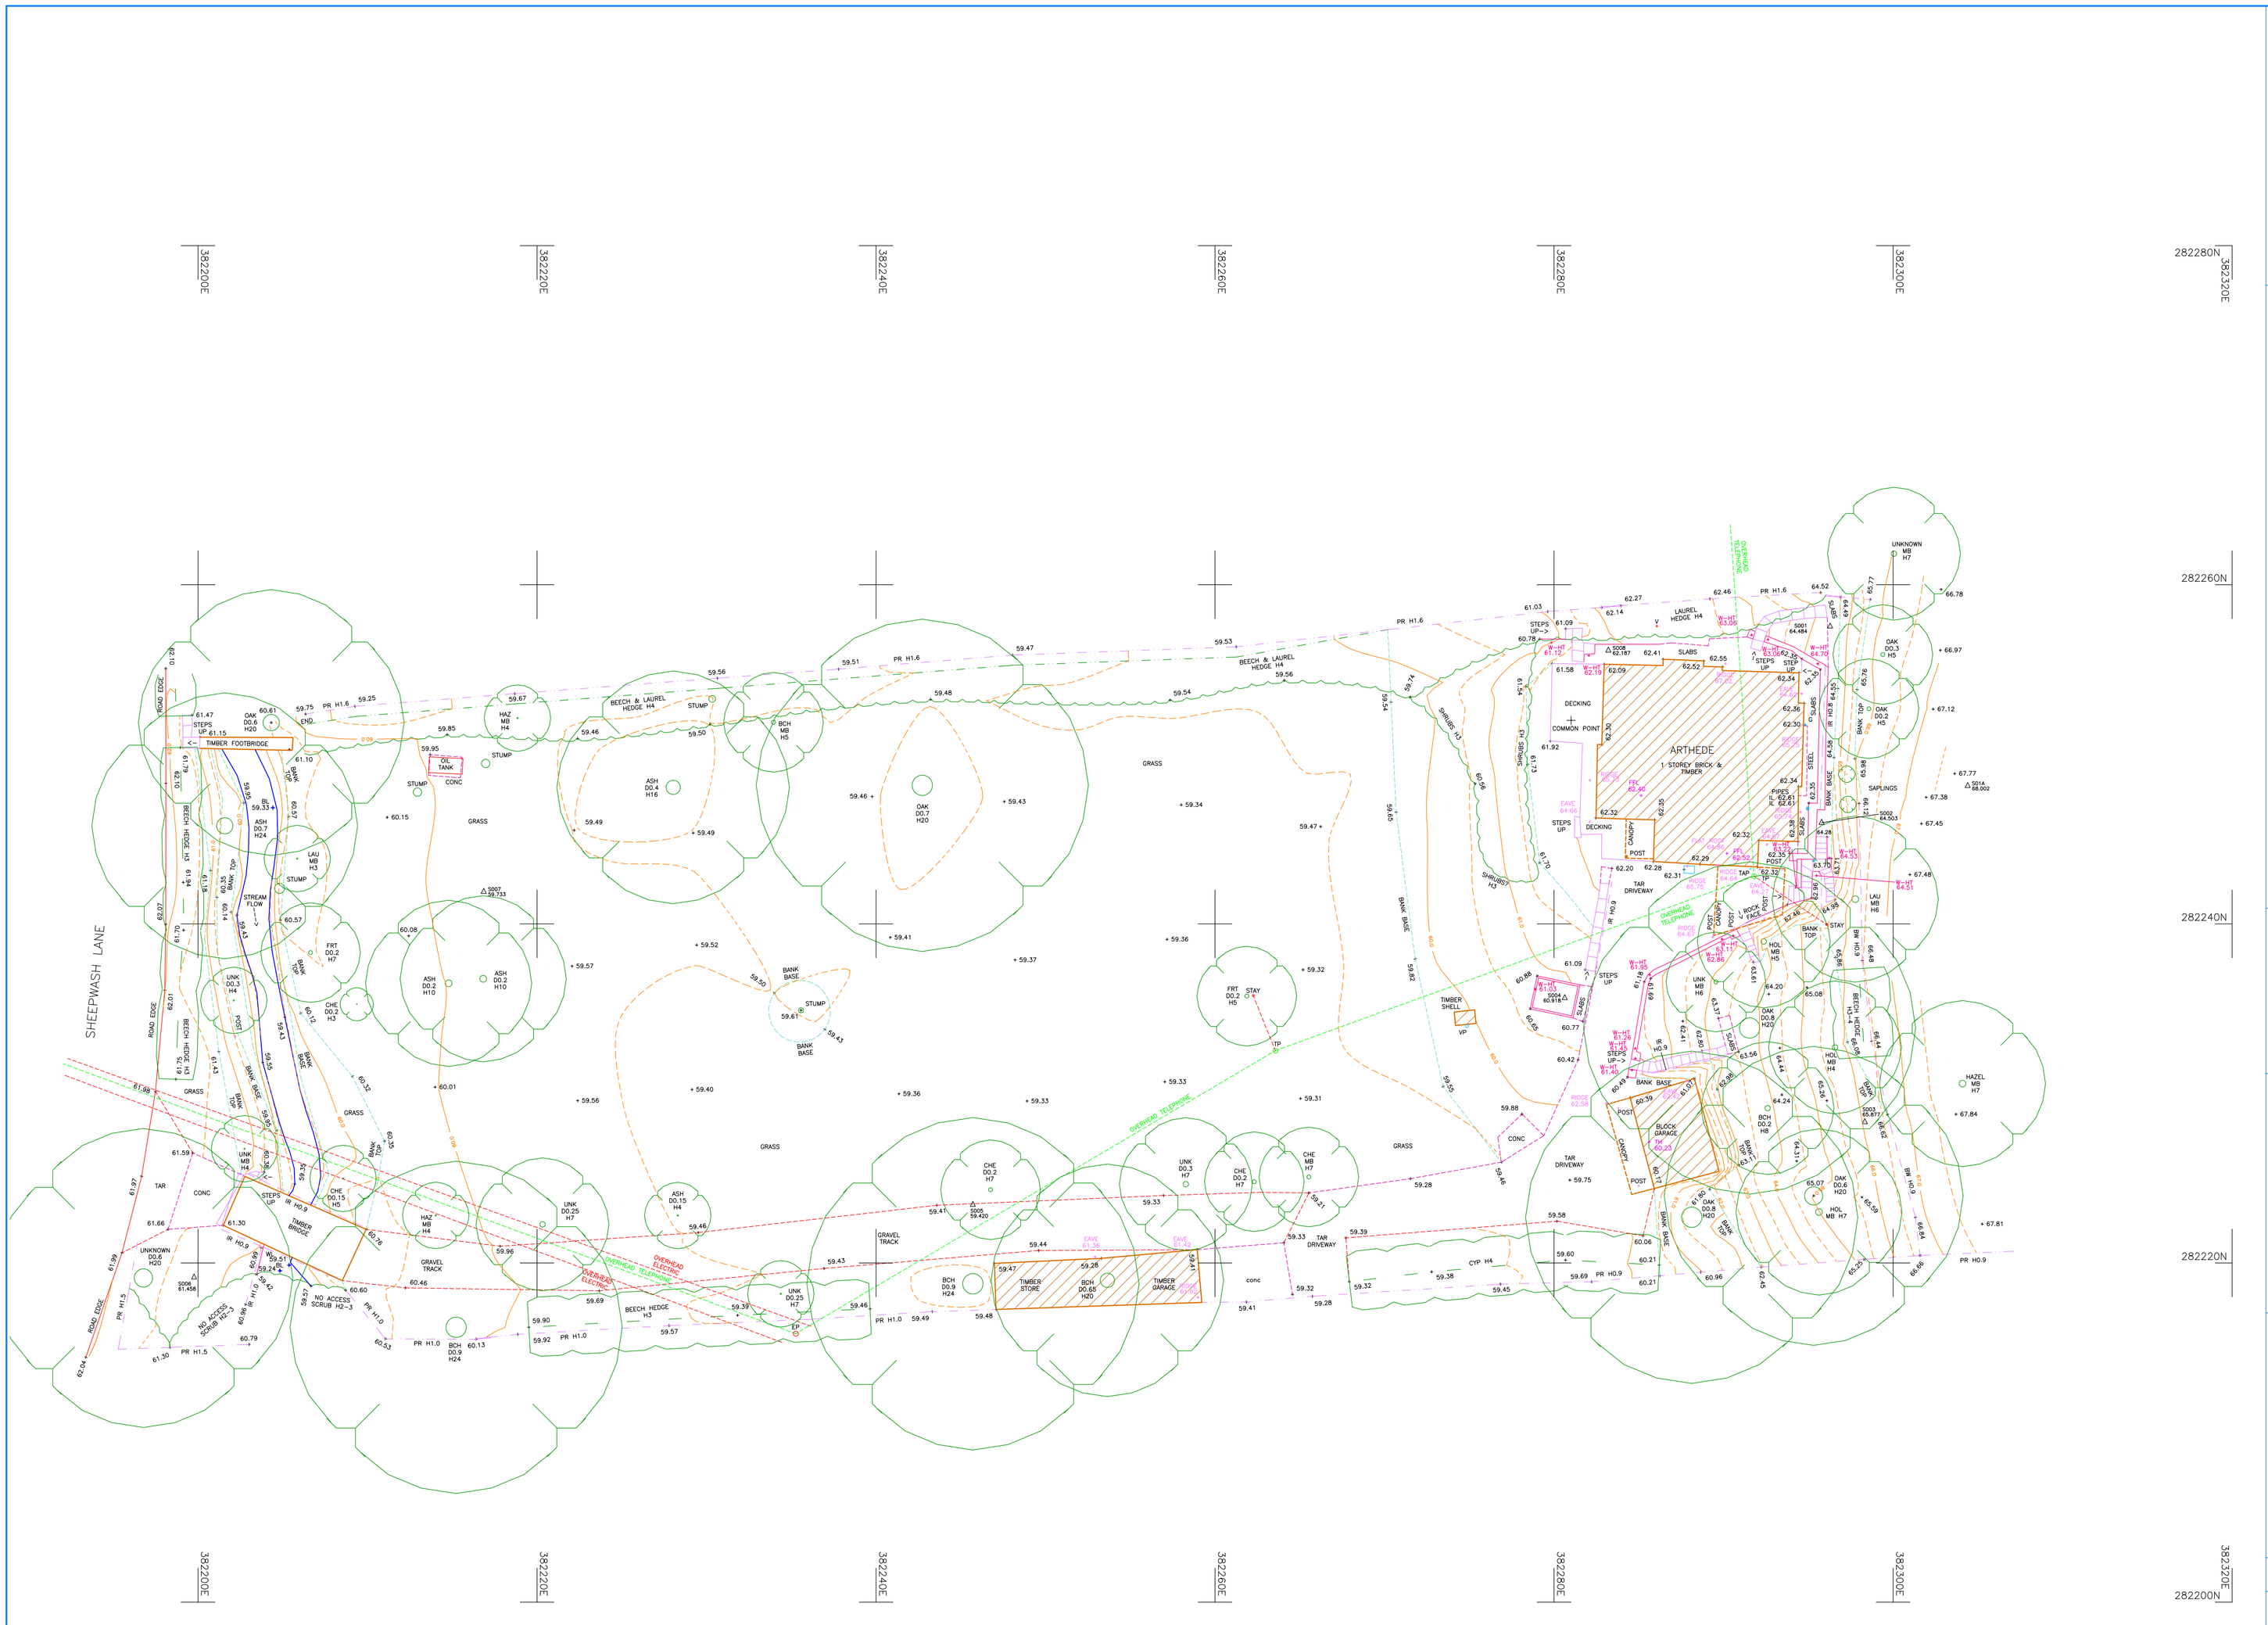


## Notes

- Datum : Ordnance Survey level Datum via OS Active GPS Network derived at station S004.
- Survey Grid : Flat earth grid derived via Ordnance Survey Active GPS Network at station S004.
- All walls are of brick construction unless noted.
- Survey contents correct as of date of survey and survey undertaken to agreed specification.
- All critical dimensions to be checked prior to site works.
- All kerb levels shown are channel levels.
- Drainage and Service covers :
  Covers buried or obscured at the time of the survey are not shown. Manholes have not been entered for safety reasons and all pipe diameters are estimated from the surface. Drainage pipe diameters are in millimetres, eg. D100 means a 100mm diameter pipe. The flow type stated is based on visual evidence seen from the surface at the time of the survey. All internal manhole details should be confirmed by the contractor on site prior to site works.
- Trees :
  For concentric spread trees the spread plotted is an average value drawn to scale to the nearest metre. The minimum individual diameter surveyed is 0.15m at 1m up the trunk from the ground. Trunk diameters are not plotted to size. General species are only stated where noted. A qualified arboriculturalist should be consulted for species type and condition. Heights (when requested) are approximate to the nearest metre.

## Legend of Abbreviations

| | | | |
|---|---|---|---|
| AV | Air Valve | LP | Lamp Post |
| BEDS | Flower Beds | LPHT | Lamp Post Top Level |
| BK/W | Brick Wall | MB | Multibole Tree |
| BL | Bed Level | MH | Manhole |
| BLK/W | Block Wall | MP | Marker Post |
| BLP | Bollard with Light | MP-E | Marker Post - Electric |
| BOL | Bollard | MP-G | Marker Post - Gas |
| BS | Brick Setts | MP-T | Marker Post - Telephone |
| BT | British Telecom | MP-W | Marker Post - Water |
| BW | Barbed Wire Fence | NAME | Road Nameplate |
| CB | Close Board Fence | PAL | Palisade Fence |
| CCTV | Closed Circuit Television Camera | POK | Top of Kerb Level |
| CELL | Cellar Cover | PR | Post and Rail Fence |
| CGI | Corrugated Iron Fence | PW | Post and Wire Fence |
| CL | Cover Level | RE | Rodding Eye |
| CLI | Chain Link Fence | REN/W | Rendered Wall |
| CONC | Concrete Surface | RET | Retaining |
| CONC/P | Concrete Panel Fence | RS | Road Sign |
| CP | Chestnut Paling Fence | RWP | Rainwater Pipe |
| CRB | Crash Barrier | SCK | Stop Cock |
| D | Diameter (trees in metres / pipes in mm) | SOC | Socket |
| DK | Drop Kerb | SOF | Soffit Level |
| E | Electricity Cover | ST/W | Stone Wall |
| ELHT | Electricity Wire Clearance Level | SV | Sluice Valve |
| EP | Electricity Pole | SVP | Soil Vent Pipe |
| EPHT | Electricity Pole Top Level | SWI | Switch |
| ER | Earth Rod | TEL | Call Box (telephone) |
| FFL | Finished Floor Level | TH | Threshold Level |
| FH | Fire Hydrant | TL | Traffic Light |
| FLAG | Flag Pole | TLHT | Telegraph Wire Clearance Level |
| FLHT | Floodlight Post Top Level | TP | Telegraph Pole |
| FLP | Floodlight Post | TPHT | Telegraph Pole Top Level |
| FP | Footpath | TV | Cable Television |
| G | Gully | UTL | Unable to Lift (Cover) |
| GV | Gas Valve | V | Valve (Unknown Type) |
| HW | Head Wall | VP | Vent Pipe |
| IC | Inspection Cover | W-HT | Top of Wall Level |
| IL | Invert Level | WL | Water Level |
| IR | Iron Railing | WLT | Wall Light |
| KOG | Kerb Offlet Gully | WM | Water Meter |
| LL | Larch-lap Fence | W/M | Wire Mesh Fence |
| | | WO | Washout Valve |
| | | WV | Water Valve |

## Window Openings

| | | | |
|---|---|---|---|
| C | Cill Level Basement Floor | C | Cill Level Third Floor |
| H | Head Level Basement Floor | H | Head Level Third Floor |
| C | Cill Level Ground Floor | C | Cill Level Fourth Floor |
| H | Head Level Ground Floor | H | Head Level Fourth Floor |
| C | Cill Level First Floor | C | Cill Level Fifth Floor |
| H | Head Level First Floor | H | Head Level Fifth Floor |
| C | Cill Level Second Floor | | |
| H | Head Level Second Floor | | |

## External Services

- Socket
- Switch
- Wall Light

## Tree Abbreviations

| | | | |
|---|---|---|---|
| ALD | Alder | HCH | Horse Chestnut |
| BCH | Beech | LAR | Larch |
| CED | Cedar | LAU | Laurel |
| CHE | Cherry | MAP | Maple |
| CYP | Cypress | PLN | London Plane |
| ELD | Elder | POP | Poplar |
| EUC | Eucalyptus | RHO | Rhododendron |
| FAC | False Acacia | ROW | Rowan |
| FRT | Fruit | SAL | Sallow |
| HAW | Hawthorn | SB | Silver Birch |
| HAZ | Hazel | SCH | Sweet Chestnut |
| HOL | Holly | WBM | Whitebeam |
| HORN | Hornbeam | WIL | Willow |

## Survey Stations

| Station | Easting | Northing | Level |
|---|---|---|---|
| S001 | 382296.288 | 282257.542 | 64.484 |
| S002 | 382295.788 | 282245.968 | 64.503 |
| S003 | 382298.335 | 282228.315 | 65.877 |
| S004 | 382280.632 | 282235.632 | 60.918 |
| S005 | 382245.711 | 282223.438 | 59.420 |
| S006 | 382199.769 | 282219.151 | 61.458 |
| S007 | 382216.861 | 282241.896 | 59.733 |
| S008 | 382283.206 | 282256.125 | 62.187 |
| S01A | 382304.402 | 282248.137 | 68.002 |


AD HORNER LTD
LAND AND MEASURED BUILDING SURVEYORS

51 Bridge Street
Pershore
Worcestershire
WR10 1AL

Telephone: 01386-555486
Website: www.adhorner.co.uk
E-mail: enquiries@adhorner.co.uk


| | |
|---|---|
| Title | Arthede Revived, Sheepwash Lane, Wolverley, Kidderminster, Worcestershire DY11 5SE<br>Topographic Survey |
| Client | Adam Harvey |
| Date | January 2024 |
| Drawing No. | 7279-23JAN24-01 |
| Plot scale | 1 : 200 on A1 Sheet |
| Digital scale | 1 CAD unit : 1 metre |
| Revision | |
| Surveyed | BPF |
| Checked | JKW |

0 metres 10

N
Ordnance Survey Grid North


© A.D.Horner Limited 2024


SUMO Group Member