

# **Envirocheck®**

LANDMARK INFORMATION GROUP®

## **Large-Scale National Grid Data**


## Source map scale - 1:1,250

'Large Scale National Grid Data' superseded SIM cards (Ordnance Survey's 'Survey of Information on Microfilm') in 1992, and continued to be produced until 1999. These maps were the fore-runners of digital mapping and so provide detailed information on houses and roads, but tend to show less topographic features such as vegetation. These maps were produced at both 1:2,500 and 1:1,250 scales.

## Map Name(s) and Date(s)

19		1991	SE
1:1	1,250	ከ:1,250 I	ı
19		TQ2680 1991 1:1,250	NE I
19	2680SV 91	L	SE
		!	- 1

## **Historical Map - Segment A13**




333396717\_1\_1 24/37933 National Grid Reference: 526520, 180820

10, Lancaster Gate, LONDON, W2 3LH



0844 844 9951 www.envirocheck.co.uk

A Landmark Information Group Service v50.0 31-Jan-2024 Page 14 of 16

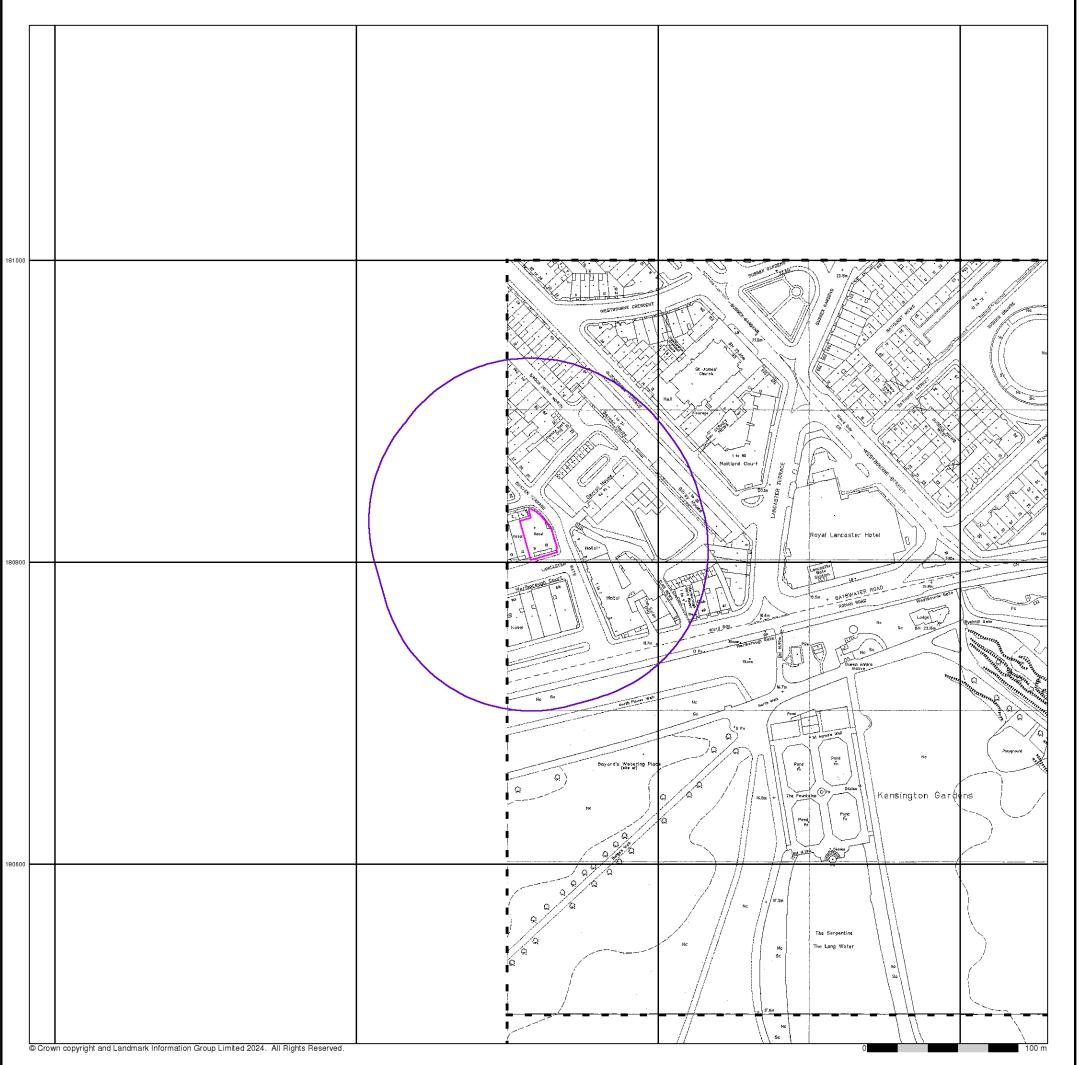

# **Envirocheck®**

LANDMARK INFORMATION GROUP®


## **Large-Scale National Grid Data**

## **Published 1996**


## Source map scale - 1:1,250

'Large Scale National Grid Data' superseded SIM cards (Ordnance Survey's 'Survey of Information on Microfilm') in 1992, and continued to be produced until 1999. These maps were the fore-runners of digital mapping and so provide detailed information on houses and roads, but tend to show less topographic features such as vegetation. These maps were produced at both 1:2,500 and 1:1,250 scales.

## Map Name(s) and Date(s)



## **Historical Map - Segment A13**



## **Order Details**

Order Number: 333396717\_1\_1
Customer Ref: 24/37933
National Grid Reference: 526520, 180820

Slice:

Site Area (Ha): 0.06 Search Buffer (m): 100

#### **Site Details**

10, Lancaster Gate, LONDON, W2 3LH



Fel: 0844 844 9952 Fax: 0844 844 9951 Veb: www.envirocheck.co.uk

A Landmark Information Group Service v50.0 31-Jan-2024 Page 15 of 16




# **Envirocheck®**

LANDMARK INFORMATION GROUP®

## Historical Aerial Photography Published 1999

This aerial photography was produced by Getmapping, these vertical aerial photographs provide a seamless, full colour survey of the whole of Great Britain

## **Historical Aerial Photography - Segment A13**



## **Order Details**

Order Number: 333396717\_1\_1
Customer Ref: 24/37933
National Grid Reference: 526520, 180820

); Aroo (40):

Site Area (Ha): 0.06 Search Buffer (m): 100

## **Site Details**

10, Lancaster Gate, LONDON, W2 3LH

Landmark®
••• INFORMATION GROUP

Fel: 0844 844 9952 Fax: 0844 844 9951 Veb: www.envirocheck.co.uk

A Landmark Information Group Service v50.0 31-Jan-2024 Page 16 of 16



## APPENDIX C

Logs


Ref: 24/37933 Rev 2 March 2024

Site	Analy	/tic	al	Service	es l	Ltd.	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Borehole Number BH1
Boring Metho CONTINUOU AUGER		-	Diamete 0mm cas	ed to 0.00m	Ground	Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
		Locatio	o <b>n</b> Q264807		Dates 08	3/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1
Depth (m)	Sample / Tests	Casing Depth (m)	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	Description	Legend Nate
0.25 0.50 0.75 1.00 1.50 1.50 2.00 2.50 2.50 2.50 3.00 3.50 3.50 4.00 4.50 4.50 5.00 5.00 6.00 6.00 7.00 7.00 7.00	D1 D2 D3 D4 V1 70 D5 V2 82 D6 V3 72 D7 V4 105 D8 V5 140+ D9 V6 140+ D10 V7 140+ D11 V8 140+ D12 V9 140+ D12 V9 140+ D13 V10 140+ D14 V11 140+ D15 V12 140+	(m)	(m)	Water Strike (1) at 2.10m.		(Thičkńess)	MADE GROUND: Crushed brick and concrete over dark brown sandy silt containing brick, concrete and other man-made fragments  MADE GROUND: Brown silty clay containing occasional brick and concrete fragments  Firm becoming stiff, brown orange silty CLAY  Stiff, dark brown grey silty sandy CLAY	* * * * * * * * * * * * * * * * * * *
Remarks V= Vane Test D= Disturbed Excavating fro	- Results in kPa Sample om 0.00m to 1.00m	for 1 hou	r.					ox) By

			nal		al Servi	ces	Lto	<b>.</b> k	Site 10-11 LAN	ICASTE	R GATE,	LONDON	1, W2 3L0	G		Borehole Number BH1
Install Single		n Type tallation		Dimensi Interna Diame	ons al Diameter of Tube [A] = 5 eter of Filter Zone = 100 mi	50 mm m		-	Client HERIOT U	JK LIMIT	ED					Job Number 2336431
				Location TQ26		Ground	Level (m	nOD) I	Engineer AXIOM ST	ructu	RES LIM	ITED			:	Sheet 1/1
Legend	Water	Instr (A)	Level (mOD)	Depth (m)	Description				G	roundwa	ater Strik	es Durin	g Drilling	9		
	>		()	(,				Denth	Casing				Read	lings		Denth
						Date	Time	Depth Struck (m)	Casing Depth (m)	Inflo	w Rate	5 min	10 min	15 min	20 min	Depth Sealed (m)
× —_×				1.00	Bentonite Seal	08/02/23		2.10	0.00	Water	Strike					
× × × × × × × × × × × × × × × × × × ×																
××									Gr	oundwat	ter Obse	rvations	During [	Drilling		
××	∇1					Date		Ι	Start of S					End of SI		T
××						Date	Time	Depth Hole (m)	Casing Depth (m)	Water Depth (m)	Water Level (mOD)	Time	Depth Hole (m)	Casing Depth (m)	Water Depth (m)	Water Level (mOD)
× = ×																
×. — ×																
×																
× × · · ·																
× × ×									Inotre	ımant G	roundwa	ter Obse	mustions			
* × ×											Touriuwa	ilei Obse	rations			
× × ×					Slotted Standpipe	Inst.			d Standpip	e						
× × ×						Date	ins	trument	[A]				Rem	arks		
× <u>×</u> ×							Time	Depth (m)	Level (mOD)							
××																
×																
* - ×																
×																
× × ×																
×																
× — ×																
× × · · ·																
× × ×																
× — ×																
× - ×																
× × -				8.00												
Remai Locka		cover set	in cemen	t												

Site	Analy	/tica	ıl Servic	es	Ltd.	Site 10-11 LANCASTER GATE	E, LONDON, W2 3LG	Trial Pit Number TP1
Excavation HAND EXCA		Dimension 0.30m(W)	ns x 0.30m(L) x 0.54m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Location TQ26	64807	Dates 09	9/02/2023	Engineer AXIOM STRUCTURES LI	MITED	Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Vater Valend
Plan .					0.10 (0.44)	MADE GROUND: Light to containing brick, concrete Complete at 0.54m		
						Trial pit was abandoned due Groundwater was not encou	e to asbestos untered during boring/excav	ration
					<u> </u>	Scale (approx)	Logged By	Figure No.
						1:50	EW	2336431.TP1

Site A	naly	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP1	
<b>Method</b> Trial Pit		Dimensions 0.30m(W) x 0.30m(L) x 0.54m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation D	В	Location TQ264807	Dates 09/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

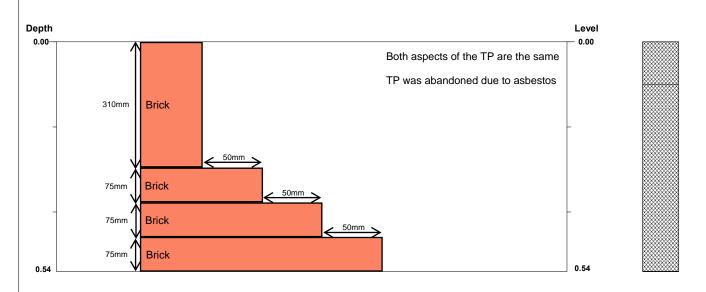


Strata			Samples and Tests				
Depth (m)	No.	Description	Depth (m)	Type	Field Records		
0.00-0.10	1	MADE GROUND: Concrete					
0.10-0.54	2	MADE GROUND: Light to medium brown sandy silt containing brick, concrete and man-made fragments					
	1		Excavatio	n Metho	d:		
			HAND EXC	AVATION			
			Shoring /	Support	:		
			Stability:				
			Backfill:				

Remarks
Trial pit was abandoned due to asbestos
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	I Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number TP2
Excavation HAND EXCA		Dimension 0.30m(W)	ns x 0.30m(L) x 1.50m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Location		Dates		Engineer		Sheet
		TQ26	4807	09	9/02/2023	AXIOM STRUCTURES LII	MITED	1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Legend Nater
Plan					(%.1½) (0.86) 1.00 (0.50) 1.50	MADE GROUND: Light to containing brick and concrete brown silty CLAY  Complete at 1.50m		
		•		•		Groundwater was not encou	intered during boring/excav	ation
		•						
		٠						
					5	Scale (approx) 1:50	<b>Logged By</b> EW	Figure No. 2336431.TP2

Site	Analy	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP2	
<b>Method</b> Trial Pit		Dimensions 0.30m(W) x 0.30m(L) x 1.50m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation	А D В	Location TQ264807	Dates 09/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

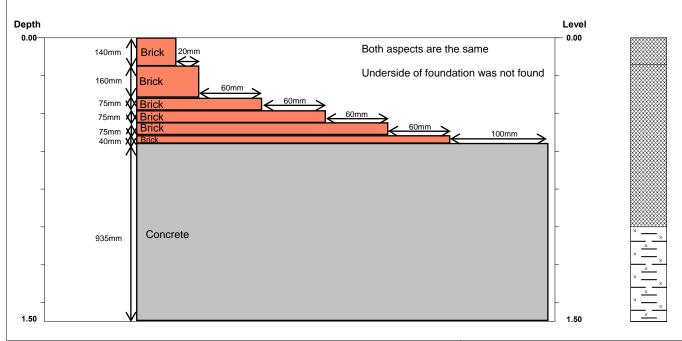

Strata				Samples and Tests				
Depth (m)	No.	Description	Depth (m)	Type	Field Records			
0.00-0.14	1	MADE GROUND: Concrete						
0.14-1.00	2	MADE GROUND: Light to medium brown sandy silt containing brick and concrete fragments						
1.00-1.50	3	Brown silty CLAY						

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	al Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG		Trial Pi Number	er
Excavation HAND EXC		Dimensio 0.30m(W	ns ) x 0.30m(L) x 0.41m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED			Job Number 233643	
		Location TQ26	64807	Dates 09	0/02/2023	Engineer AXIOM STRUCTURES LIF	MITED		Sheet 1/1	
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	ı	Legend	Water
Plan					0.08 (0.33) 0.41	MADE GROUND: Brown s concrete fragments  Complete at 0.41m	e sandy silt containing brick a			
						Trial pit was abandoned due Groundwater was not encou	to asbestos Intered during boring/excav	ation		
		_								
		•		•	•					
						Scale (approx)	Logged By	Figure	No.	
						1:50	EW	2336	431.TP3	3

Site Analy	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP3	
Method Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 0.41m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 09/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

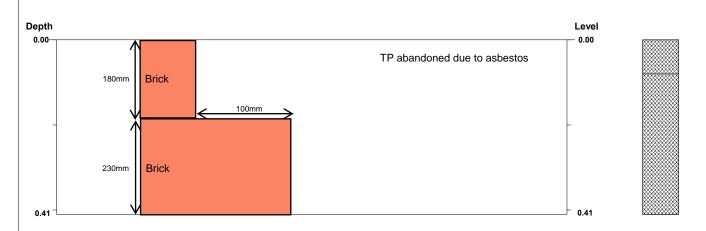

Strata			Samples and Tests		
Depth (m)	No.	Description	Depth (m)	Туре	Field Records
0.00-0.08	1	MADE GROUND: Concrete			
0.08-0.41	2	MADE GROUND: Brown sandy silt containing brick and concrete fragments			
			Excavatio	n Metho	d:
			HAND EXC	AVATION	

Shoring / Support:

Stability:


Backfill:

Remarks
Trial pit was abandoned due to asbestos
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	I Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number TP4
Excavation HAND EXC		Dimensior 0.30m(W)	ns x 0.30m(L) x 1.33m(D)			Client HERIOT UK LIMITED		Job Number 2336431
		Location TQ26	4807	Dates 09	9/02/2023	Engineer AXIOM STRUCTURES LII	MITED	Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Legend rage
					0.08	MADE GROUND: Concreted MADE GROUND: Dark brand concrete fragments	te own sandy silt containing br	ick
1.03	D1 M1 44/300				1.03 (0.30) 1.33 (0.31) 1.34 (0.31) 1.35 (	Complete at 1.33m	rk brown silty gravelly clay	
Plan .						Remarks		
						Groundwater was not encou M= Makintosh Probe-Blows, D= Disturbed Sample	Penetration (mm)	auUII
				•				
		•		•				
				•	 	Scale (approx) 1:50	Logged By	<b>Figure No.</b> 2336431.TP4

Site Analy	tical Service	es Ltd.	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP4
<b>Method</b> Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 1.33m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 09/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

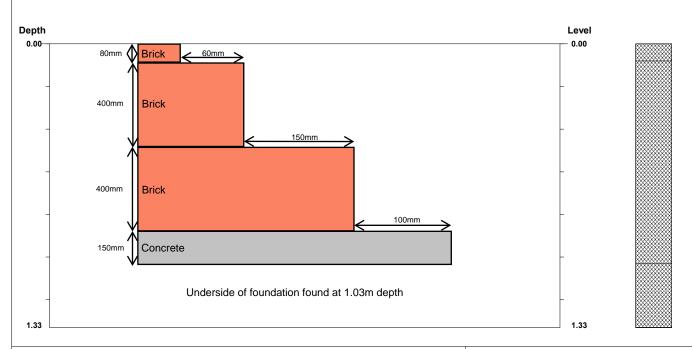

Strata Samples and Tests					
Depth (m)	No.	Description	Depth (m)	Туре	Field Records
0.00-0.08	1	MADE GROUND: Concrete			
0.08-1.03	2	MADE GROUND: Dark brown sandy silt containing brick and concrete fragments	1.03	D1	
1.03-1.33	3	MADE GROUND: Soft, dark brown silty gravelly clay containing brick fragments	1.03-1.33	M1 44/300	
			Excavation	n Method	:

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks
Groundwater was not encountered during boring/excavation
M= Makintosh Probe-Blows/Penetration (mm)
D= Disturbed Sample

Logged By : EW Checked By

Site	Analy	/tica	al Servic	es l	Ltd.	Site  10-11 LANCASTER GATE, LONDON, W2 3LG			
Excavation HAND EXC		Dimensio 0.30m(W	<b>ns</b> ) x 0.30m(L) x 0.58m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431	
		Location TQ20	64807	Dates 09	0/02/2023	Engineer AXIOM STRUCTURES LII	MITED	Sheet 1/1	
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Tegend Nater	
0.28 0.28-0.58	D1 M1 51/300				0.08	MADE GROUND: Soft, bricontaining occasional brice  Complete at 0.58m	own orange silty gravelly cla	ay	
						Groundwater was not encou M= Makintosh Probe-Blows, D= Disturbed Sample	untered during boring/excav /Penetration (mm)	ation	
		<u>.</u>			_	·			
	•		·	·					
						Scale (approx)	Logged By	Figure No.	
						1:50	EW	2336431.TP5	

Site Analy	tical Service	es Ltd.	Site  10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP5
Method Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 0.58m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 09/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

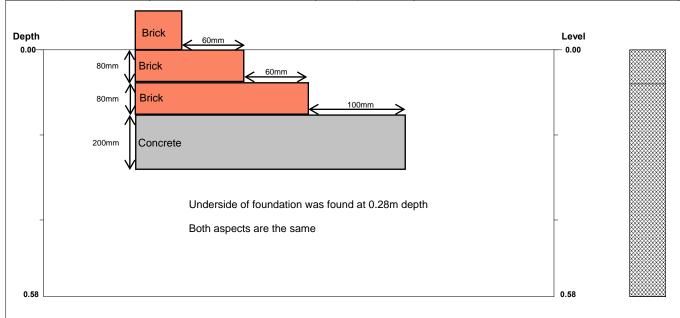

Strata Samples and Te			and Tests	ests	
Depth (m)	No.	Description	Depth (m)	Туре	Field Records
0.00-0.08	1	MADE GROUND: Concrete			
0.08-0.58	2	MADE GROUND: Soft, brown orange silty gravelly clay containing occasional brick fragments	0.28 0.28-0.58	D1 M1 51/300	
			Excavation	n Method	
			HAND EXC	AVATION	

Stability:

Shoring / Support:


Backfill:


Remarks
Groundwater was not encountered during boring/excavation
M= Makintosh Probe-Blows/Penetration (mm)
D= Disturbed Sample

Logged By : EW Checked By :

Site	e Analy	ytica	al Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	E, LONDON, W2 3LG		Trial Pit Number	г
Excavation HAND EXC		Dimensio 0.30m(W	ons /) x 0.30m(L) x 0.24m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED			Job Number 233643	
		Location		Dates	0/02/2023	Engineer			Sheet	_
		TQ2	64807		0/02/2023	AXIOM STRUCTURES LII	MITED		1/1	
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	L	egend	Water
					0.02 (0.14) 0.24	MADE GROUND: Screed	hh.			
						MADE GROUND: Dark br	own silty clay containing brid	ck		
					E	and concrete fragments  Complete at 0.24m				
					E					
Plan .						Remarks				
		•				Unable to complete trial pit of Groundwater was not encou	due to a drain run untered during boring/excav	ation		
		•			[	Scale (approx)	Logged By	Figure I		
						1:50	EW	23364	131.TP6	

Site A	ite Analytical Services Ltd.   Site   10-11 LANCASTER GATE, LONDON, W2 3LG   Trial Num TF				
Method Trial Pit		<b>Dimensions</b> 0.30m(W) x 0.30m(L) x 0.24m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation D	А О В	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1





Underside of foundation was not found due to a drain run

Strata			Samples and Tests			
Depth (m)	No.	Description	Depth (m)	Type	Field Records	
0.00-0.02	1	MADE GROUND: Screed				
0.02-0.10	2	MADE GROUND: Brick rubble				
0.10-0.24	3	MADE GROUND: Dark brown silty clay containing brick and concrete fragments				
		·	F41-		1.	

**Excavation Method:** 

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks Unable to complete trial pit due to a drain run Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	al Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number <b>TP7</b>
Excavation HAND EXC		Dimensio 0.30m(W	ons () x 0.30m(L) x 0.45m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Location TQ2	64807	Dates 10	0/02/2023	Engineer AXIOM STRUCTURES LII	MITED	Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Vater Vater
0.15 0.15-0.45	D1 M1 50/300				0.06 (0.39) 0.45	MADE GROUND: Concret MADE GROUND: Loose, brick and concrete fragme Complete at 0.45m	dark brown sandy silt contai	ning
						D= Disturbed Sample M= Makintosh Probe-Blows, Groundwater was not encou	/Penetration (mm) intered during boring/excav	ation
						Scale (approx)	Logged By	Figure No.
						1:50	EW	2336431.TP7

Site Analy	tical Service	es Ltd.	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP7
<b>Method</b> Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 0.45m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

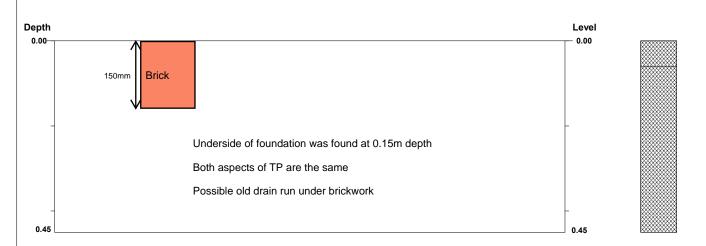


Strata			Samples and Tests			
Depth (m)	No.	Description	Depth (m)	Туре	Field Records	
0.00-0.06	1	MADE GROUND: Concrete				
0.06-0.45	2	MADE GROUND: Loose, dark brown sandy silt containing brick and concrete fragments	0.15 0.15-0.45	D1 M1 50/300		
			Excavation	n Method	:	
			HAND EXC	AVATION		
			Shoring /	Support:		
			Stability:			
			Backfill:			

Remarks
D= Disturbed Sample
M= Makintosh Probe-Blows/Penetration (mm)
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	al Servic	es l	Ltd.	Site  10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number TP8
Excavation N		Dimensio 0.30m(W	ons ') x 0.30m(L) x 1.50m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Location		Dates		Engineer		Sheet
			64807	10	)/02/2023	AXIOM STRUCTURES LII	MITED	1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Tegend Nate
					0.08	MADE GROUND: Concret	te/screed	
					0.08		own sandy silt containing bi	ick
					0.58	MADE GROUND: Dark br	own silty sandy gravelly cla	у
					(0.92)	containing brick fragments	<b>;</b>	
					1.50	Complete at 1.50m		
					E			
					<u> </u>			
					<u>-</u>			
					Ē			
					E			
					E			
					<u> </u>			
					<u> </u>			
					<u> </u>			
					Ē			
					<u> </u>			
					Ē			
					-			
					<u>-</u>			
Dien						Bamauka		
Plan .		·			• •	Remarks		ar .
						Groundwater was not encou	intered during boring/excav	ation
	•	•						
					· · s	Scale (approx)	Logged By	Figure No.
						1:50	EW	2336431.TP8

Site Ar	naly	tical Service	es Ltd.	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP8
Method Trial Pit		Dimensions 0.30m(W) x 0.30m(L) x 1.50m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation D	В	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

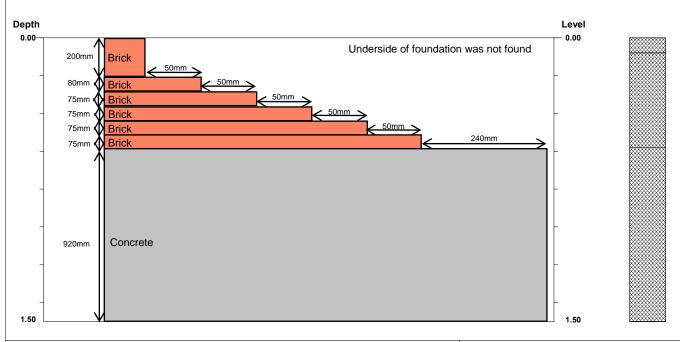

Strata			Samples and Tests			
Depth (m)	No. Description		Depth (m)	Туре	Field Records	
0.00-0.08	1	MADE GROUND: Concrete/screed				
0.08-0.58	2	MADE GROUND: Dark brown sandy silt containing brick and concrete fragments				
0.58-1.50	3	MADE GROUND: Dark brown silty sandy gravelly clay containing brick fragments				

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tic	al Servic	es	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number TP9
Excavation HAND EXC		Dimens 0.30m(	sions W) x 0.30m(L) x 1.50m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Locatio	on Q264807	Dates 10	0/02/2023	Engineer AXIOM STRUCTURES LII	MITED	Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Tegend Vater
Plan			Water (1) at 1.50m.		1.50	MADE GROUND: Brick MADE GROUND: Dark br containing brick and conce  Complete at 1.50m	own silty sandy gravelly cla ete fragments	y
		-						
		•		-				
		•		•		Scale (approx)	Logged By	Figure No.
						1:50	EW	2336431.TP9

Site Analy	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP9	
Method Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 1.50m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

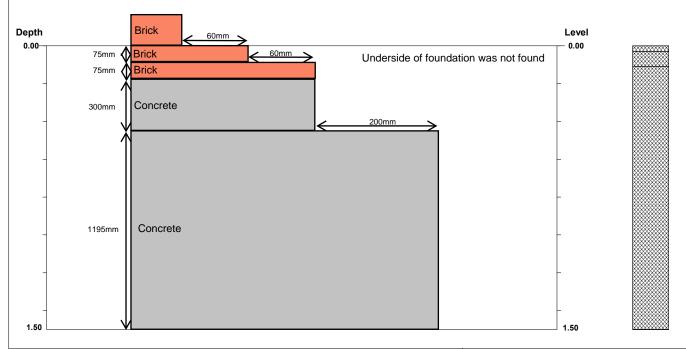

Strata			Samples and Tests			
Depth (m)	No.	Description	Depth (m)	Туре	Field Records	
0.00-0.03	1	MADE GROUND: Concrete				
0.03-0.11	2	MADE GROUND: Brick				
0.11-1.50	3	MADE GROUND: Dark brown silty sandy gravelly clay containing brick and concrete fragments				

#### Groundwater

 Date
 Struck (m)
 Rate
 5 min
 10 min
 15 min
 20 min
 Remarks

 10/02/23
 1.50
 Water
 Image: Control of the property of the propert

#### **Excavation Method:**

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks

Logged By : EW
Checked By :

Site	Analy	/tica	I Servic	es	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG	Trial Pit Number TP10
Excavation		Dimension 0.30m(W)	x 0.30m(L) x 1.50m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED		Job Number 2336431
		Location TQ26	4807	Dates 10	0/02/2023	Engineer AXIOM STRUCTURES LI	MITED	Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Legend teg
Plan .					0.05  1.00  1.50  1.50	MADE GROUND: Concre MADE GROUND: Dark br and concrete fragments  Brown orange silty CLAY  Complete at 1.50m	own sandy silt containing b	rick
		•		•	·   s	Scale (approx)	Logged By	Figure No.
						1:50	EW	2336431.TP10

Site Analy	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP10	
<b>Method</b> Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 1.50m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

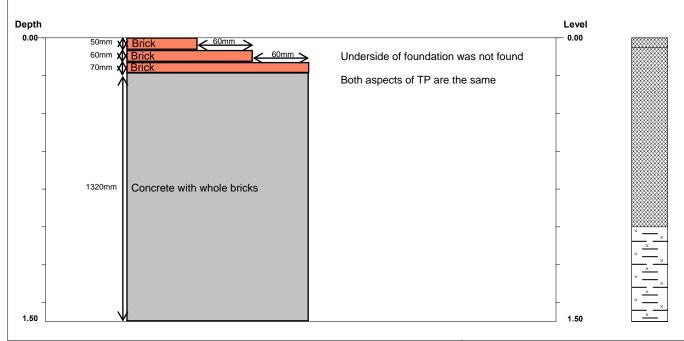

Strata	Strata			Samples and Tests			
Depth (m)	No.	Description	Depth (m)	Туре	Field Records		
0.00-0.05	1	MADE GROUND: Concrete					
0.05-1.00	2	MADE GROUND: Dark brown sandy silt containing brick and concrete fragments					
1.00-1.50	3	Brown orange silty CLAY					

HAND EXCAVATION

Shoring / Support:

Stability:


Backfill:

Remarks
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By :

Site	Analy	/tica	ıl Servic	es l	Ltd.	Site 10-11 LANCASTER GATE	, LONDON, W2 3LG		Trial Pit Number TP11
Excavation HAND EXC		Dimension 0.30m(W)	ns x 0.30m(L) x 0.66m(D)	Ground	Level (mOD)	Client HERIOT UK LIMITED			Job Number 2336431
		Location TQ26	s4807	Dates 10	0/02/2023	Engineer AXIOM STRUCTURES LII	MITED		Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	L	.egend Mater
Plan					0.03 0.14 (0.38) (0.56)	MADE GROUND: Floorbo MADE GROUND: Joists MADE GROUND: Dark bright of the standard concrete fragments Complete at 0.66m	own sandy silt containing br	\ <u>`</u>	VOID VOID
						Unable to complete trial pit of Groundwater was not encou	due to a concrete obstructio intered during boring/excav	on ration	
		•			•				
		•							
						Scale (approx)	Logged By	Figure	
						1:50	EW	23364	31.TP11

Site Analy	tical Service	es Ltd.	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP11
Method Trial Pit	Dimensions 0.30m(W) x 0.30m(L) x 0.66m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation A D B	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

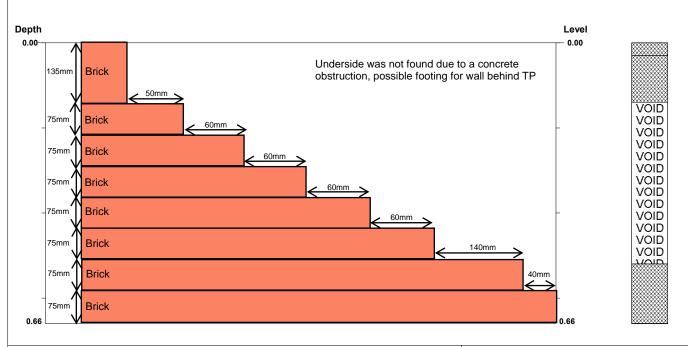

Strata			Samples and Tests			
Depth (m) No. Description			Depth (m)	Type	Field Records	
0.00-0.03	1	MADE GROUND: Floorboards				
0.03-0.14	2	MADE GROUND: Joists				
0.14-0.52	3	MADE GROUND: Void				
0.52-0.66	4	MADE GROUND: Dark brown sandy silt containing brick and concrete fragments				

HAND EXCAVATION

Shoring / Support:

Stability:

Backfill:


Remarks
Unable to complete trial pit due to a concrete obstruction
Groundwater was not encountered during boring/excavation

Logged By : EW Checked By

: 2336431.TP11 Figure No.

Site	Analy	/tic	al Servic	es	Ltd.	Site 10-11 LANCASTER GATE	E, LONDON, W2 3LG	Trial Pit Number TP12
Excavation Method HAND EXCAVATION		Dimensions   0.30m(W) x 0.30m(L) x 1.40m(D)		Ground Level (mOD)  Dates 10/02/2023		Client HERIOT UK LIMITED	Job Number 2336431	
						Engineer AXIOM STRUCTURES LIMITED		Sheet 1/1
Depth (m)	Sample / Tests	Water Depth (m)	Field Records	Level (mOD)	Depth (m) (Thickness)	D	escription	Vater Vater
1.10 1.10-1.40	D1 M1 26/300		Water Seepage(1) at 1.40m.		1.10 (0.30) 1.40	MADE GROUND: Brick MADE GROUND: Dark br and concrete fragments  Soft, dark brown stained b  Complete at 1.40m	own silty clay containing brid	
						M= Makintosh Probe-Blows D= Disturbed Sample	/Penetration (mm)	
		•		•				
		•						
						Scale (approx)	Logged By	Figure No. 2336431.TP12

Site	Analy	tical Service	Site 10-11 LANCASTER GATE, LONDON, W2 3LG	Trial Pit Number TP12	
<b>Method</b> Trial Pit		Dimensions 0.30m(W) x 0.30m(L) x 1.40m(D)	Ground Level (mOD)	Client HERIOT UK LIMITED	Job Number 2336431
Orientation	В — В — В	Location TQ264807	Dates 10/02/2023	Engineer AXIOM STRUCTURES LIMITED	Sheet 1/1

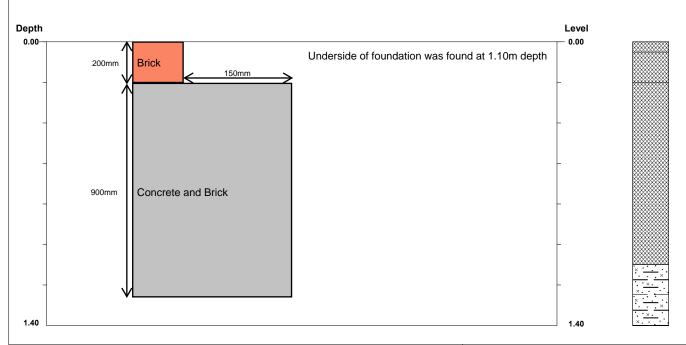

Strata			Samples and Tests		
Depth (m)	No.	Description		Туре	Field Records
0.00-0.05	1	MADE GROUND: Screed		D1 M1 26/300	
0.05-0.20	2	MADE GROUND: Brick			
0.20-1.10	3	MADE GROUND: Dark brown silty clay containing brick and concrete fragments	1.10 1.10-1.40		
1.10-1.40	4	Soft, dark brown stained black silty sandy CLAY	1.10-1.40	IVI I 20/300	

#### Groundwater Date Struck (m) Rate 5 min 10 min | 15 min | 20 min Remarks Water Seepage 10/02/23 1.40

**Excavation Method:** HAND EXCAVATION

Shoring / Support:

Stability:

Backfill:

Remarks M= Makintosh Probe-Blows/Penetration (mm) D= Disturbed Sample

Logged By : EW Checked By :