

KIDBROOKE PARK ROAD PHASE 1

Play Equipment Schedule 31/01/2024



KPR-MCA-SW-00-RP-L-0004 C02

Play Equipment Guarantees

PLAYDALE GUARANTEES

Up to 20 years Timber, 25 years Structural Stainless Steel, 5 years Painted Steelwork

Play Equipment Guarantees

PLAYEQUIP GUARANTEES

Timber - 15 Years Fixings - 20 Years

F5- Tree Trunk 1No

Image

Tree trunk with bark stripped and all surfaces sanded and oiled. Approximate length 6m. Tree trunk to be bedded on concrete footings to prevent movement during play.



F6 - Play Boulders 22No

Play Boulders - CED Stone sales@cedstone.co.uk.
Boulders to be smooth glacial boulders
approximately 600 x 450 450mm.

Image



F7A - Timber Sleepers 41No

Timber sleepers inset into soft landscape on a
100mm deep Type 1 sub-base to finish flush with
soil level. Timber sleepers to be pressure treated
softwood 1800 x 245 x 120mm.

Image



F7B - Playdale Stepping Logs 35No

Stepping Logs 53No
(18 months to 6 years)
Playdale AT(D8)
Max Free Height of Fall 0.2m

Image



F8 - Table Tennis Table - 2No

Table Tennis Table permanently fixed to
manufacturers specification - Cornilleau 510 Proline


Image



F9 - Playequip Mountain Scramble Climber




PLAYEQUIP Mountain Scramble Climber
info@playequip.com

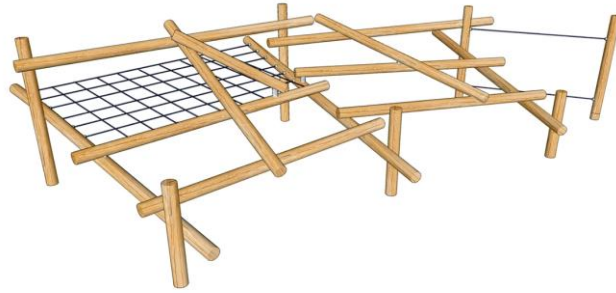


Image



Original Item - Duncan and Grove Log Climbing Frame No 2 CL:2.02 (9.4m x 7.5m)









<p>F10. Playdale Hammock with Rope Sling and Timber Posts - 2No</p> <p>Playdale Hammock with Rope Sling and Timber Posts installed to manufacturer's specification with reinforced turf surround. Age range 5-12 years. Playdale Code TE(ENC1). Max Free height of Fall 0.55m</p>	<p>Image</p> 
<p>F11 - Playdale Embankment Slide, Staircase and Ramp with Rope</p> <p>Embankment Wide Slide (1.7m) colour green (3 months to 12 Years) Playdale ESWS Max Free Height of Fall 1.0m Embankment Steps with Handrail Playdale EMS + ESH Embankment Rope Ramp Playdale EMR</p>	<p>Image</p> 
<p>F12 Playdale Timber Team Swing</p> <p>Playdale Timber Team Swing colour Green (3 to 14 years) Playdale TTS Max Free Height of Fall 1.6m</p>	<p>Image</p> 




<p>F13 - Playdale Zig Zag Stepper</p> <p>Zig Zag Stepper (3-14 years) Playdale SPZ/S Max Free Height of Fall 0.55m</p>	<p>Image</p> 
<p>F13 Playdale Adventure Trail - Combo 1</p> <p>Playdale Adventure Trail - Combo 1 (3 Years to 14 Years) Playdale CMB/1/S Max Free Height of Fall 0.55m</p>	<p>Image</p> 
<p>F14 - Playdale Adventure Trail - Combo 10</p> <p>Playdale Adventure Trail - Combo 10 (6 Years to 14 Years) Playdale CMB/10/S Max Free Height of Fall 0.55m</p>	<p>Image</p> 

Original Item - Duncan and Grove Climbing Net No 6 CN.2.12 (12.1m x 11m)



<p>F15 - Playdale Timber Balance Beam</p> <p>Balance Beam (18 months to 6 Years) Playdale BBS/S Max Free Height of Fall 0.55m</p>	<p>Image</p> 
<p>F16 - Playdale Timber Sheep Springer</p> <p>Playdale Timber Spring Sheep SPR/SH 18 Months to 6 years</p>	<p>Image</p> 
<p>F17 - Playdale Timber Elephant Springer</p> <p>Playdale Timber Elephant SPR/EL 18 Months to 6 years</p>	<p>Image</p> 

F18 - Playdale Timber Turtle Springer	Image
Playdale Timber Turtle SPR/TU 18 Months to 6 years	
F19 - Timberplay Sheep Resting Timber Figure	Image
Timberplay Ltd. Aizlewoods Mill, Nursery St, Sheffield S3 8GG. — Tel: +44 114 282 3474. Email: info@timberplay.com. Order No. 4.24196 Sheep Resting	
F20 Timberplay Pig Timber Figure - 2No	Image
Timberplay Ltd. Aizlewoods Mill, Nursery St, Sheffield S3 8GG. — Tel: +44 114 282 3474. Email: info@timberplay.com. Order No. 4.24180 Pig	

<p>F21 Timberplay Pony and Trap Timber Figure</p> <p>Timberplay Ltd. Aizlewoods Mill, Nursery St, Sheffield S3 8GG. — Tel: +44 114 282 3474. Email: info@timberplay.com. Order No. 4.24145 Pony and Trap</p>	<p>Image</p> 
<p>F22 - Playdale Inclusive Orbit Roundabout</p> <p>Playdale Inclusive Orbit Roundabout Playdale Code IORB. Installed in accordance with manufacturer's specification.</p>	<p>Image</p> 
<p>F23 - Playdale Musical Panel</p> <p>Playdale Musical Panel. Playdale Code PLP(MU)T2 colour Green.</p>	<p>Image</p> 

<p>F24 - Timberplay Pony timber figure - 2No</p> <p>Timberplay Ltd. Aizlewoods Mill, Nursery St, Sheffield S3 8GG. — Tel: +44 114 282 3474. Email: info@timberplay.com. Order No. 4.24135 Pony</p>	<p>Image</p>  A young girl with blonde hair, wearing a green vest over a pink long-sleeved shirt and blue jeans, is sitting on a wooden pony figure. The pony is made of light-colored wood and has a white mane. The background shows a park-like setting with trees and a stone wall.
<p>F25 - Play Mounds in Porous Play Safety Surface</p> <p>Play Mounds in Porous Play Safety Surface Colours; Eggshell RAL1015 Beige RAL1014 Grey RAL7038 Pink RAL4003</p>	<p>Image</p>  A large, colorful play mound made of porous safety surface material. The mound is divided into several sections of different colors: blue, yellow, pink, and green. In the background, there are trees, a fence, and other playground equipment.