



593808 – Southern Water Falmers

Ground Control Limited


Kingfisher House
Radford Way
Billericay
Essex CM12 0EQ


T 01277 650 697

E info@ground-control.co.uk

www.ground-control.co.uk

- G1 - Various trees of number approx. 5, running along fence line of railway, including Poplars, to be pollarded by 4m in height and 2m in spread to allow extra light to reach the rear of the building.
- Where trees extend over railway land, cut limbs to be tethered and zip lined to SW land side. G2 - all self sown, saplings as shown in pictures, along top of bank to be reduce to 1.5m from ground level, no works to the conifers in this area.
- T1 - Tree to be removed to just above ground level
- T2 - unknown species of poor quality to be felled to ground level.
- T3 - unknown species, pollard to 3.5m from ground level.

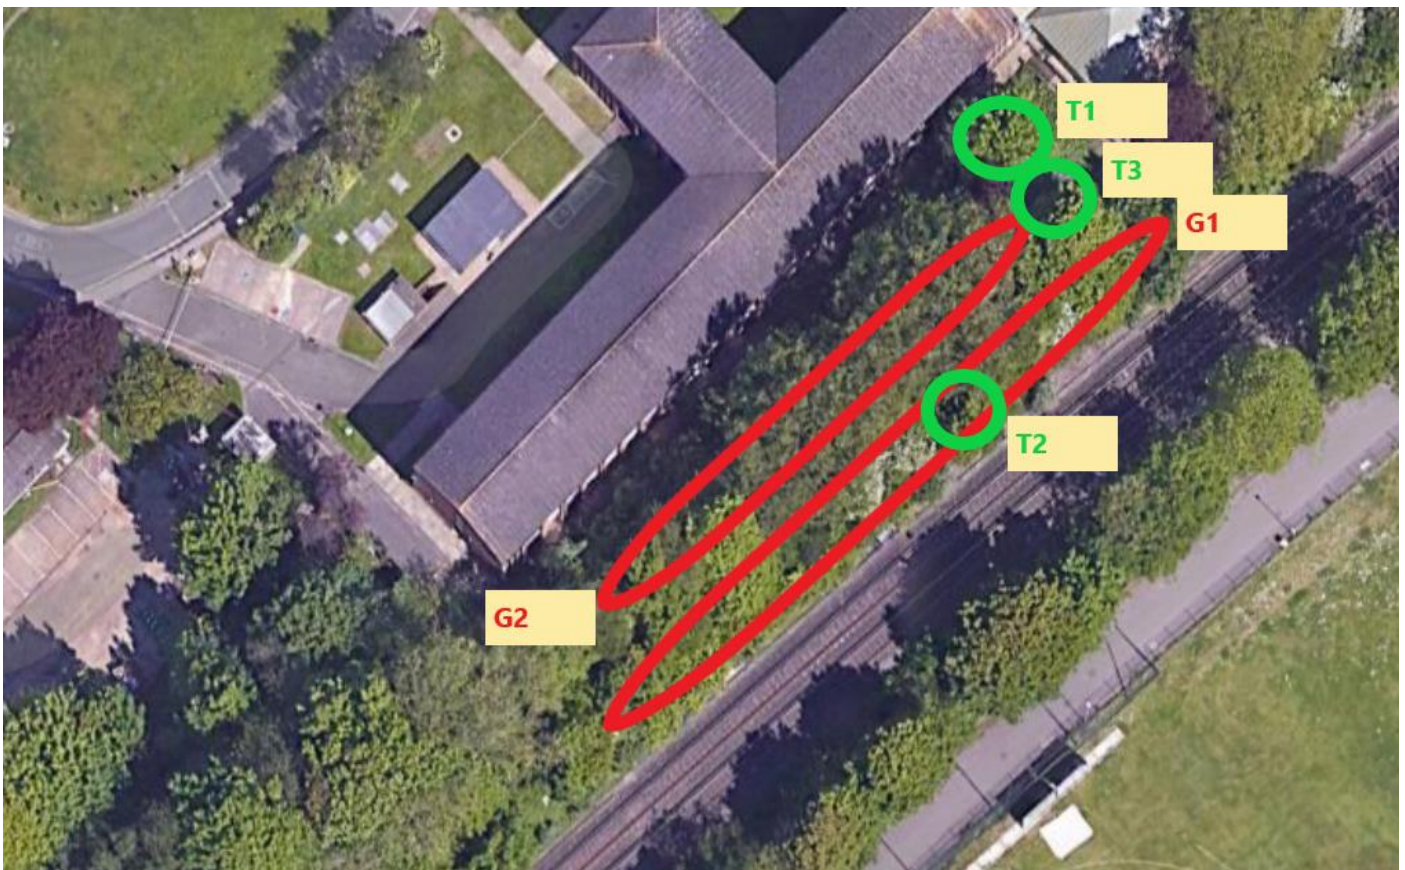

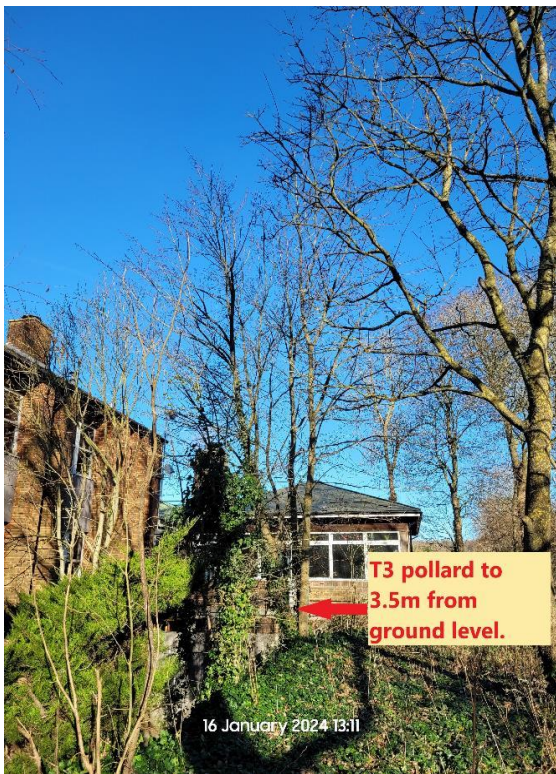





16 January 2024 13:07



16 January 2024 13:11

