

Proposed South Elevation(1:50)

**ROOF:**  
Cure-IT Flat roof finish (Dark Grey). Code 4 Lead throughout.  
Fascia/Soffits - White

**DRAINAGE:**  
New 68mm Ø PVCu RWP connected into existing drainage, 120mmØ Deepflow RWG - colour: Black. Bracket and support to be fixed at 500m horizontal centres, 1.8m vertical centres

**WINDOWS:**  
Windows to be uPVC External Grey / Internal White Optiwhite argon gas filled double glazed with 'KS' inner pane coating with warm air edge spacer (1.40 W/m²K U-value). Opening parts shown. Glass in doors and any adjacent windows to be toughened on inside pane; laminated on outer, designed to resist human impact as set in BS6262 Part 4: 2005. Trickle vents to be fitted to opening sashes as shown to achieve 12000mm² rate of ventilation. 25mm Kingspan insulation to be fitted at window jamb, head and cills to prevent thermal bridging

**WALL:**  
Beige Random Fyfestone to Basecourse & White Blockwork Harled to Dado & Full Height Wall - to match EXISTING

**FASCIA & SOFFIT:**  
White uPVC


**RAINWATER GOODS:**  
Black uPVC

Any discrepancies or queries regarding any part of the works to be discussed prior to any affected work being carried out.

Drawings not to be scaled and all sizes to be checked on site.

Lighting / Electrical Items all as per Specification and to final positions to be agreed on site by customer.

ANY Sub floor ventilator covered by works to be re-routed to external air.

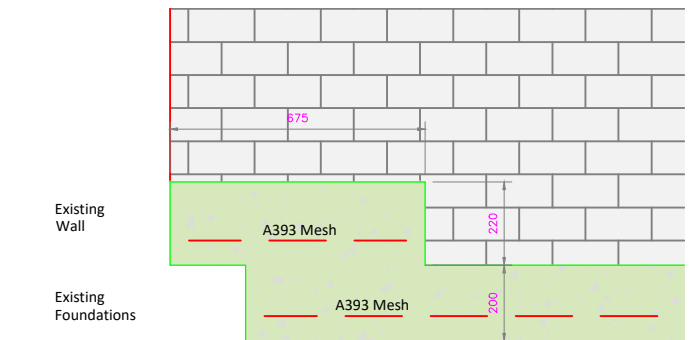

Existing / New Foundation  
"Piggy Back" Detail (1:20)

**GENERAL NOTES**

ALL ELECTRICAL WORK TO BE CARRIED OUT IN STRICT ACCORDANCE WITH THE LATEST I.E.E REGULATIONS AND TO COMPLY WITH THE 18TH EDITION OF THE BS 7671: 2018 'THE REQUIREMENTS FOR ELECTRICAL INSTALLATIONS'.

ANY DISCREPANCIES OR QUERIES REGARDING ANY PART OF THE WORKS TO BE DISCUSSED PRIOR TO ANY AFFECTED WORK BEING CARRIED OUT.

WHILST THE HIGHLIGHTED AREAS ARE INDICATIONS OF SERVICES BELOW GROUND THERE MAY BE OTHERS OUT WITH, THEREFORE ALL EXCAVATIONS SHOULD INCORPORATE EXTREME CARE AND DILIGENCE.

DRAWINGS TO BE READ AND UNDERSTOOD PRIOR TO WORK COMMENCING.FIGURED DIMENSIONS TO TAKE PREFERENCE OVER SCALED DIMENSIONS. ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE. EXISTING DRAINAGE AND SERVICES POSITIONS TO BE CONFIRMED ON SITE.ANY DISCREPANCIES TO BE REPORTED BACK TO ARCHITECT.

<b>CUSTOMER APPROVAL</b>		
SALES ADVISER		
SALES MANAGER		
APPROVAL	DATE	SIGNATURE

No.	REVISION	DRAWN BY	CHECKED BY	DATE
3	ISSUED FOR PLANNING & WARRANT APPROVAL	T.ELLIS		25/04/2024
2	ISSUED FOR CUSTOMER APPROVAL	T.ELLIS		16/04/2024
1	REISSUED TO SALES FOR APPROVAL	T.ELLIS		15/04/2024
0	ISSUED TO SALES FOR APPROVAL	T.ELLIS		11/04/2024

**CUSTOMER:**  
**MR & MRS INNES**  
**16 CRAIBSTONE GARDENS**  
**ABERDEEN**  
**AB21 9SW**

**PROJECT:**  
**PROPOSED EXTENSION**  
THISTLE CONTRACT NO: **41701**



**THISTLE HOUSE, WOODSIDE ROAD**  
**BRIDGE OF DON, ABERDEEN, AB23 8EF**  
TEL: 01224 706555 WWW.THISTLE.GROUP

DATE	APR '24	DRAWING NO:	<b>203</b>
SCALE	1:50		

