
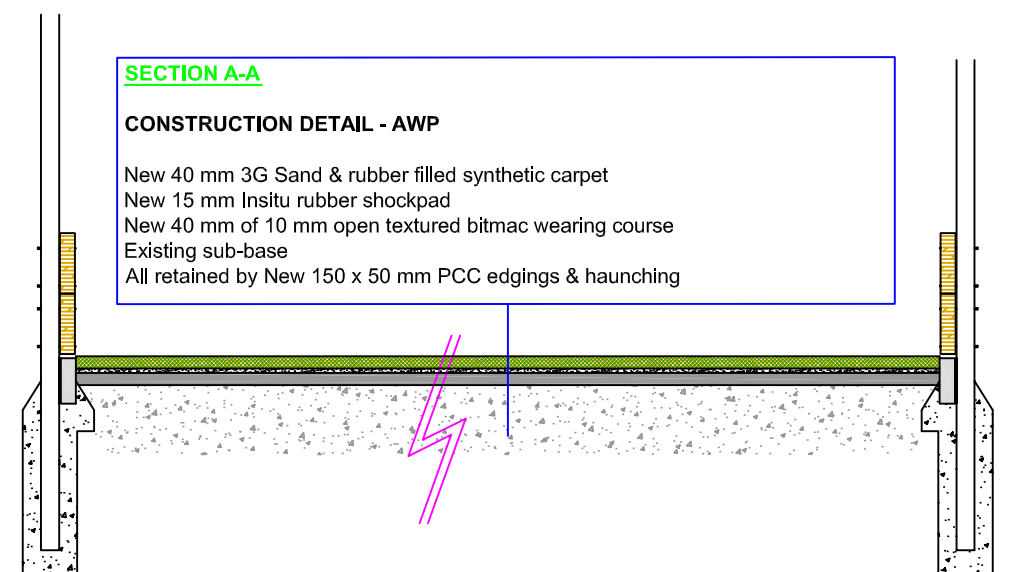


REVISION HISTORY

r1 - scale bar added.



FENCING DETAIL

Fencing to be generally 3.000 m high galvanised & powder coated green or black 868 Twinbar fencing, Complete With 1.200 m high Super Rebound Panel. All fencing supported on rectangular hollow section line posts set in concrete at max. 2.525 m centres.

5.000 m High fencing behind goals denoted :-

Decontamination area at entrance to pitch (Double gate grid - 3.000 m x 1.500 m)

Infill mitigation 500 mm solid barrier to AGP fencing (2nr. boards stacked to fencing)

2nr. Boot wipers at AGP entrance (Either side of new decontamination grid)

ALL FENCING GALVANISED & POWDER COATED GREEN OR BLACK. GATE LOCATIONS TBC



LINEMARKING DETAIL

Football - Shown white - Constructed white (100 mm Inlaid lines)

9v9 (U11-U12) - Shown blue - Constructed blue (100 mm Painted lines)

7v7 (U9-U10) - Shown gold - Constructed yellow (100 mm Painted lines)

5v5 (U7-U8) - Shown magenta - Constructed red (100 mm Painted lines)

All linemarking colours, sizes and layout to be confirmed.

FLOODLIGHTING DETAIL

Existing Floodlighting system to be removed and replaced with 6nr. 15.000 m high raise and lower columns, providing a maintained average horizontal illuminance of 200 LUX (LED System)

<b>PHD</b>	<b>Paul Hawkins Development</b> 365 Uppingham Road, Leicester LE5 4DP
	GCS/01/01r1 Greyfriars Catholic School, Oxford Refurbished Artificial turf sports pitch Layout, dimensions and section
08/03/24	© PAUL HAWKINS DEVELOPMENT 2024
Scale: 1:250(A2)	