



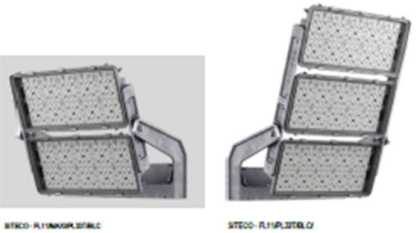



**MATERIALS AND FINISHES SCHEDULE SH-1**


Item	Picture	Location	Ref	Notes
<b>HARD STANDING</b>				
PAVING – PORUS Mac Adam		All New foot paths	Tarmac UTILPOROUS or similar to approval. To manufacturers details and specifications.	Edged with Bullnosed Concrete Edging 914 x 150 x 50mm Grey.
CAR PARK PORUS Mac Adam		New Carpark	Tarmac UTILPOROUS or similar to approval. To manufacturers details and specifications.	Edged with standard Half Battered Straight Kerb 914 x 125 x 150mm Grey and Dropper Kerbs BSS 125x150x225x914mm to accommodate level access.  Line Markings (parking bays traffic white RAL 9016
STEPS		Two risers concrete to details. With contrasting planted nosings.		

**FENCING**

RESPECT BARRIER			Zaun Spectator fencing with DUO8 (200x50) or Dura lock 3 rail fencing with mesh infill.	
-----------------	---	--	---	--

<p>SECURITY FENCING</p>		<p>To the perimeter of the pitches</p>	<p>Zaun DUO 8 Sports double wire mesh fencing System Colour RAL 6009. 2400mm High. Or similar to approval.</p>	
<p>Stand Cladding</p>		<p>Roof and walls of the stand</p>	<p>box profile sheet 32/1000, 0.7mm Sheet Moorland Green. Or Similar to approval.</p>	
<p>Flood lights</p>	 <p><small>SITECO - FL11/MAXI/PL33T/BLC</small>      <small>SITECO - FL11/PL33T/BLC</small></p>	<p>Pitches as detailed</p>	<p>SITECO - FL11/MAXI/PL33T/BLC and SITECO - FL11/PL33T/BLC/ as detailed elsewhere.</p>	

<p>Safety barriers and hand rails to low level retaining wall to access path.</p>		<p>Safety barriers and hand rails to steps and low level retaining wall to access path..</p>	<p>Key clamp or similar</p>	
---	---	--	-----------------------------	--

<p>Masonry retaining wall.</p>		<p>Low level retaining wall.</p>	<p>Red Class B Perforated B Engineering Brick 65mm, Ibstock or similar to approval.</p>	
--------------------------------	---	----------------------------------	---	--

<p>Team Shelter</p>		<p>Pitch side</p>	<p>Pro Team shelter, MR goals or similar to approval.</p>	
---------------------	--	-------------------	---	--