richard taylor architects
139 Stonecot Hill, North Cheam, Surrey SM3 9HX
t: 020 8296 8785 **e:** richard@rtaylorarchitects.co.uk

Schedule of Materials

224 Ruxley Lane, Epsom,

KT19 9EY

28/04/2021

Rev A

richard taylor architects
139 Stonecot Hill, North Cheam, Surrey SM3 9HX
t: 020 8296 8785 **e:** richard@rtaylorarchitects.co.uk

Introduction

This document is an addition to our proposed elevations. It identifies the external materials to be used within our building in pictorial format and provides specifications of each one we have selected.

We intend to store and reuse the existing materials on site as part of the demolition plan to prevent filling landfill. This includes brickwork, metal, steel, stone and wood.

Contents

Brickwork . . . . . Page 3

Roof Tiles . . . . . Page 4

Zinc Panels . . . . . Page 4

Balustrade

- Handrail . . . . . Page 4
- Panel . . . . . Page 5

Door and Window Frames . . . . . Page 5

richard taylor architects
139 Stonecot Hill, North Cheam, Surrey SM3 9HX
t: 020 8296 8785 **e:** richard@rtaylorarchitects.co.uk

Brickwork

Primary Brickwork

Ibstock South Holmwood

Dorking Multi

215 x 102.5 x 65 mm

Secondary Brickwork

Reuse Existing Brickwork on Site

Below DPC

Wienerberger Facing Brick Staffordshire Smooth Blue (Perforated)

Blue

215 x 102.5 x 65 mm

Mortar

Cemex Yellow Medium Mortar

Yellow Medium

richard taylor architects
139 Stonecot Hill, North Cheam, Surrey SM3 9HX
t: 020 8296 8785 **e:** richard@rtaylorarchitects.co.uk

Roof Tiles

Redland MockBond Mini Stonewold Concrete Slate

77 Charcoal Grey (Coated)

418 x 334 mm

Zinc Panels

RHEINZINK Angled Standing Seam

Titanium Zinc

430 x 0.7 mm

Balustrade

Handrail

Galvanised Steel

richard taylor architects
139 Stonecot Hill, North Cheam, Surrey SM3 9HX
t: 020 8296 8785 **e:** richard@rtaylorarchitects.co.uk

Panel

Toughened Laminated Glass

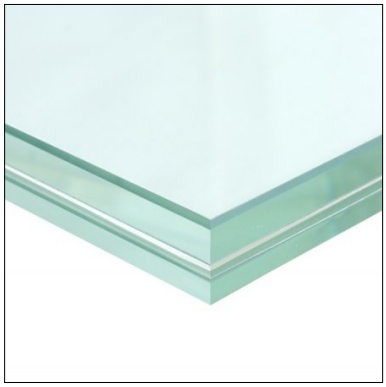

<u>Door and Window Frames</u>

Powder Coated Aluminium/High Performance UPVC
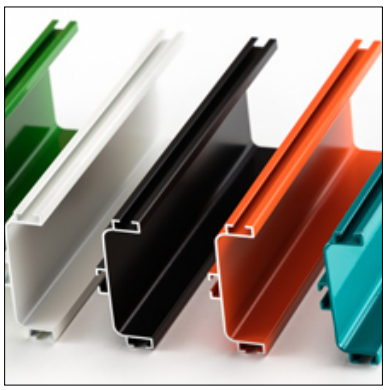
Silver Grey