


All excavations within the RPA to be carried out by hand under Arboricultural supervision.
Pile locations to be initially dug by hand down to 600mm and any roots revealed and clearly severed.
The ground beam over the RPA is to be installed above the existing ground level.


| Notes: | |
|---|--|
| BS5837 Tree Retention Categories | |
| CATEGORY A Trees of a high quality with an estimated remaining life expectancy of at least 40 years | CATEGORY B Trees of a moderate quality with an estimated remaining life expectancy of at least 20 years |
| CATEGORY C Trees of a low quality with an estimated remaining life expectancy of at least 10 years | CATEGORY U Tree of poor condition that cannot be satisfactorily retained as living trees in the context of the current land use for longer than 10 years |
| ROOT PROTECTION AREA Precautinary areas - soil structure must be protected. | TREES / GROUPS TO REMOVE PRIOR TO DEVELOPMENT COMMENCING |
| GROUND PROTECTION | EXISTING DRIVEWAY (PATIO / HARD STANDING) |
| MANUAL EXCAVATION HAND DIG | CONSTRUCTION EXCLUSION ZONE |
| TREE SHADOW | TREE PROTECTION FENCING |

Additional information
The Warning sign below is to be attached to the Tree protective fencing once erected
**-TREE PROTECTION AREA-
-KEEP OUT!!-**
---Do NOT Move This Fence---
(Town & Country Planning Act 1990)
TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS
AND/OR ARE SUBJECT OF A TREE PRESERVATION ORDER
CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION
ANY ENCROACHMENT INTO THE PROTECTION AREA MUST BE WITH THE WRITTEN
PERMISSION OF THE LOCAL PLANNING AUTHORITY

TREE PROTECTION FENCING (TPF)
Secondary Specification - Protective fencing shall consist of a herts
fencing framework in accordance with figure 3 of British Standard 5837
(2012); comprising 2m tall welded mesh (herts fencing) panels on
rubber or concrete feet. The weldmesh panels shall be securely fixed
and joined together using a minimum of two anti-tamper couplers,
installed so that they can only be removed from inside the fence. The
distance between the fence couplers shall be at least 1m and shall be
uniform throughout the fence. The panels shall be supported on the
inner side by stabilizer struts, attached to a base plate secured with
ground pins

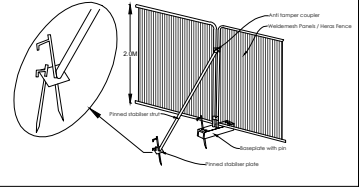

GROUND PROTECTION
For pedestrian and vehicle weights up to 2000KG within the RPA the installation of
ground protection shall be in the form of a single thickness of scaffold boards or
ply board on top of a compressible layer of woodchip (100 - 200mm deep) laid
onto a geotextile, or supported by scaffold. For heavier traffic a proprietary system
such as Greenflex Ground-Guards (heavy duty plastic ground protection mats
clipped together) laid above 150mm deep layer of compressible woodchip. Or
pre-cast reinforced concrete slabs. No storage or mixing of potentially hazardous
materials within these areas; such as diesel fueling or cement mixing (unless
specific precautions have been made that prevents runoff / contamination into
the ground from any spillage)

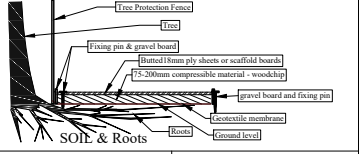

General Site precautions
The following points will be observed at
all times:
• No mechanical digging or scripting
is allowed within defined RPA.
• No fires to be lit on site.
• No access permitted inside the CEZ
or TPF.
• No materials, equipment or debris to
be stored within the CEZ or RPAs of
retained trees.
• Notice boards, telephone cables or
other services will not be attached to
retained trees.
• Materials that may contaminate the
soil (cement mixer, fuel, vehicle
wastings) will not be permitted to
operate or allow run off into the
RPAs of retained trees or soils.
• Site operations will avoid damage to
the aerial part of the tree.

Dryad Tree Specialists
Oak Hill
Wood Street Village
Guildford
GU3 3ET
(01483) 455 555
www.dryad-trees.co.uk

CLIENT:
Mr J Beedle

SITE:
**Plot 4 Moor Park Gardens,
Coombe Lane West, KT2 7UD**

TITLE:
Tree Protection Plan

| | | |
|---------------------------|----------------------------------|------------------|
| SCALE AT A3: 1:200 | DATE: 09/05/2022 | DRAWN: Tom B |
| PROJECT NO: D2904.V1.0 | DRAWING NO: D2904.V1.0-A3-TPP | REVISION: 1.0 |