



ENGINEERING

**Construction Surface Water Management Plan
for the Proposed Construction of Synchronous Condensers
on land at Leys and Ivy Farm, Yaxley, Suffolk**

Contents

- 1 Introduction
- 2 Site Details
- 3 Roles and Responsibilities
- 4 Key Risks Identified During Construction
- 5 Managing Surface Water During Construction

Appendices

- 1 Site Location Plan
- 2 Material/Plant Area Plan

3088 – CSWMP – May 2023

**Construction Surface Water Management Plan
for the Proposed Construction of Synchronous Condensers
on land at Leys and Ivy Farm, Yaxley, Suffolk**

1 Introduction

- 1.1 MTC Engineering (Cambridge) Ltd. has been asked to provide a Construction Surface Water Management Plan in relation to the proposed development on Land to the west of Leys Lane, Yaxley, Suffolk, to ensure that surface water quality and quantity is managed throughout the construction process to mitigate impacts off site.

2 Site Details

- 2.1 Conditional planning consent has been granted for the construction and operation of Synchronous Condensers with ancillary infrastructure, and associated works including access and landscaping at land to the west of Leys Lane, Yaxley, Suffolk, under planning reference DC/23/02095.
- 2.2 A copy of the site location plan is provided in Appendix 1. Surface water drainage systems proposed at the site includes the following:
- Attenuation Pond to serve/attenuate surface water discharge from impermeable areas at the site prior to discharge to existing ditch to the north.

3 Roles and Responsibilities

- 3.1 The Main Contractor will be responsible for the full day to day management and coordination of the site.
- 3.2 The Main Contractor will be provided with a copy of this method statement prior to appointment and required to adhere to this method statement under their appointment.
- 3.3 As part of the Main Contractor appointment they will be required to provide a copy of this method statement to all sub-contractors undertaking work at the site and ensure that all sub-contractors adhere to this method statement under their appointments.
- 3.4 Should any alterations/deviation from this statement be requested by the Main Contractor or any sub-contractor these will be discussed prior to appointment and only be permitted if acceptable to all relevant parties.
- 3.5 The Main Contractor will be responsible for assessing the work from a Health and Safety/Risk Assessment perspective, and any associated alterations thereby required to the method statement will be agreed prior to commencement of works.
- 3.6 Provision should be made for inspection at key stages, and on completion of construction to ensure that the system has been constructed in accordance with the approved design and specification, as a minimum inspections should be undertaken as follows:
 - Pre-excavation inspection to ensure that construction runoff is being adequately dealt with on site and will not cause clogging of SuDS.
 - Inspection during laying of any pipework.
 - Inspection and testing during the placing of earthworks, pavement or filter materials.
 - Inspection and level check of the prepared SuDS components.
 - Inspection of completed SuDS.

- Final inspection before handover to ensure that all construction silt has been removed, the final construction is in accordance with the design and there are no visible defects.

3.7 The Main Contractor will ensure that copies of adequate employers and public liability insurance certificates have been issued to the client prior to commencement of works, and ensuring that any sub-contractors are adequately insured.

4 Key Considerations Identified During Construction

4.1 Several key risks have been identified in relation to flood risk, drainage, and the environment during the construction phase of the development and require management strategies/method statements to ensure that risks are adequately minimised.

- There is a risk associated with the potential for increased surface water runoff rates from the site during extreme rainfall events.
 - There is a risk associated with the potential for pollutants from construction material to runoff onto adjacent land, particularly during heavy rainfall.
 - Runoff from exposed ground and materials
 - Plant washing areas
 - Fuel and chemical storage/refueling areas

5 Managing Surface Water During Construction

5.1 Increased Surface Water Runoff

- The initial phase of construction works will not involve the introduction of impermeable surfaces, thus during this initial phase there will be limited surface water runoff from the site.
- The proposed surface water drainage system, including pipes beneath the access, Attenuation Pond will be installed as early as is feasible in the construction process and before any major earthworks/ground works and before any impermeable surfacing is completed.
- The construction of the surface water drainage system prior to any major earth works and impermeable surfacing being completed will ensure that surface water discharging to the existing ditch found to the north is suitably restricted prior to discharge.
- Surface water discharge from the areas in which plant and materials are stored and surface water runoff from areas of impermeable surfacing will also be towards the surface water drainage systems via sheet flow and temporary filter drains.
- The filter drains are vegetated strips that provide an area in which surface water flow is treated prior to entering the temporary lagoon.
- The filter strips should have stable outlets before opening major areas for development.
- Inlet protection for surface water sewers should be installed as soon as the drain is functional to trap sediment on site to prevent silt building up within the proposed drainage system during construction.
- The surface water drainage system and new surfaces are to be checked and cleaned regularly throughout the construction phase.

- The surface water drainage system is to be thoroughly cleaned and rehabilitation works carried out to restore them to their design condition prior to completion. Once the permanent facilities have been demonstrated to work as envisaged, temporary drainage and sediment control measures can be dismantled.

5.2 **Potential for Pollution from Materials and Plant**

- All materials, plant and all fuels, oils and chemicals will be stored in an impermeable bund compound.
- Stockpiles are to be located away from on site drainage system.
- Plant and materials will only be moved from their designated storage area whilst in use around the site, and at all times when not in use will be stored in this area.
- Materials and plant will only be ordered/delivered to the site as close as is reasonably practicable to when they are required in the construction process in order to minimise the presence of stored materials and plant on the site and thus the risk of pollution.
- Where reasonably practicable materials and plant will remain covered to prevent rainfall landing on and running off materials/plant.

5.2.1 Planting Washing Areas

- Plant and wheel washing should be in a designated area, the designated area should be tanked and should not be allowed to infiltrate into the ground. The Tanked area will be emptied of water by a tanker on a weekly basis or as required.

5.2.2 Fuel/Chemical Storing/Refueling Area

- Any fuels or liquids pollutants required to be stored at the site at any point during construction activities will be stored in an impermeable membrane filled with stone to form a bunded area.
- Bunded fuel bowsers to be used at all times, this must be with a control ‘nappy’ under the inlet with pads and socks also present, with refueling to only be carried out by a designated person(s) under control of the Site Agent.
- The designated locations to refuel mobile plant is to be located at least 10m away from the watercourse.

5.2.3 Additional Measures

- Hazardous materials, if found, must be removed same day, whilst waste materials must be removed within 2 days.
- Materials will be stored securely in designated areas with protection (e.g skips to be provided with covers) to stop misplacement of materials across the site.
- Lorries are to be covered to avoid dust from aggregate deliveries or much contaminating the site.
- Spill kits are to be retained on site throughout the construction period with training provided to employees on how to use.
- The site will be managed and controlled in accordance with the Construction Phase Health and Safety Plan with monthly inspections from our H&S Consultant.

- The following list provided in Table 5.1 should be used as a basis for onsite inspections

Pre-construction checklist – managing Silt	√
Exposed soils are not washing out and causing silt problems	
Silt fences or temporary basins required to manage silt are provided where necessary	
Where SuDS are used ensure they are cleaned out	
Protection is in place to prevent silt washing into pervious paved areas	
Protection is in place for all underground storage systems and they have provision for cleaning	
A mobile silt catchment plant is necessary	
Runoff from fresh concrete is managed	

Table 5.1 Pre construction checklist for managing silt

5.3 Accidental/Unforeseen/Unexpected Impacts and Events

- In the event that any accidental/unforeseen/unexpected impact or event occurs during construction that has the potential to result in either pollution to groundwater, result in an increased risk of flooding, or cause other environmental damage all work at the site will cease immediately, with all plant and material present on site being moved to the material storage area.
- Examples of such events may include a fuel/liquid container being accidentally split resulting in spillage.
- Should any such event occur, the Main Contractor will firstly take any reasonable action available to minimise the risk associated with the event that occurs, and secondly will immediately contact the Environment Agency and provide details of the event that has occurred to the Environment Agency, who will likely send an engineer to inspect the incident as soon as possible.
- An appropriate remedial works strategy will then be developed in consultation with the Environment Agency and will then be carried out at the expense of the Main Contractor

or via their insurance. The contractor will have ensured that copies of appropriate employers and public liability insurance certificates have been issued to the client prior to commencement of works.


- Upon completion of works these will be checked by the Environment Agency and either approved or any further remedial works required agreed and undertaken.
- Work will only recommence once a cause for the accidental damage has been established, any resultant alterations to the construction method or plans have been made, and the Environment Agency have approved works to continue.

APPENDIX 1
SITE LOCATION PLAN

LOCATION PLAN

LEGEND

- SITE INFRASTRUCTURE:**
- LANDOWNERS PROPERTY
 - PROPOSED SITE

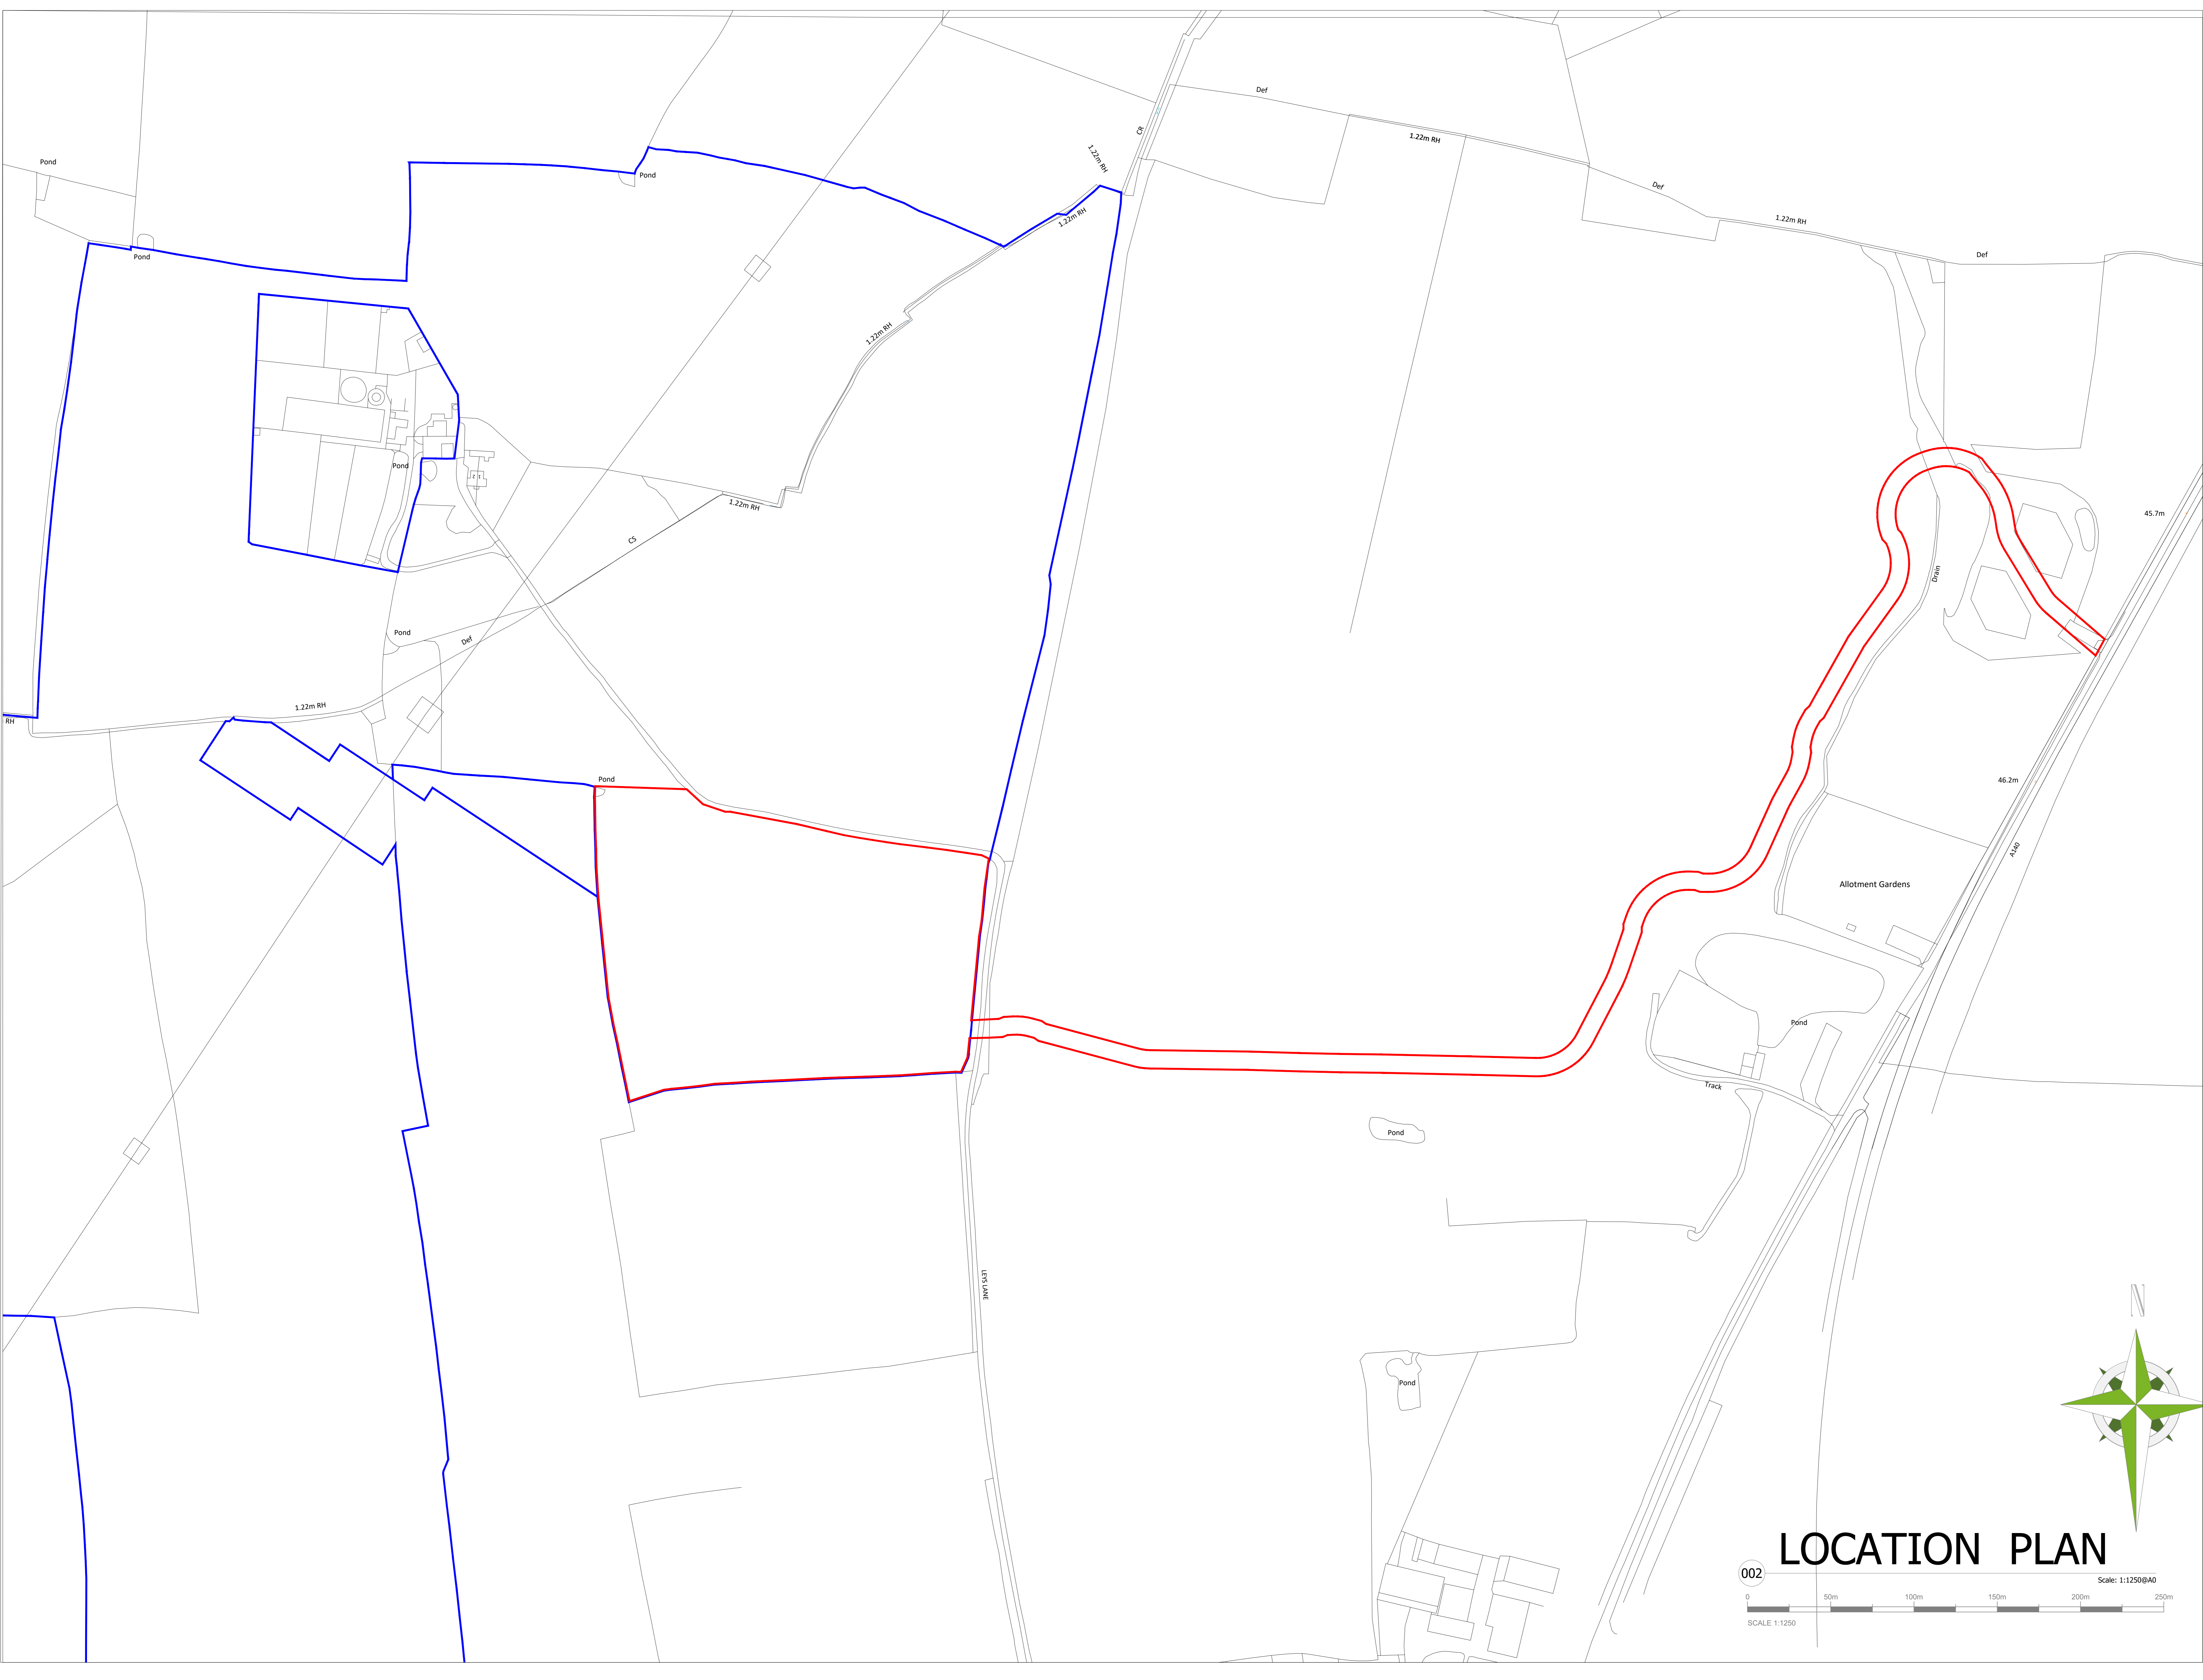

REV	REVISION NOTES	DRW	CHK	APP	DATE
B	Red line (proposed site) & blue line (landowner's property) boundaries amended	ST	JC	JC	09-02-23
A	Red line area amended	HC	JC	JC	22-06-22

REVISIONS

Design

ALL DIMENSIONS TO BE CHECKED ON SITE
 WORK TO FIXED DIMENSIONS ONLY
 REPORT DISCREPANCIES TO CONRAD ENERGY LTD
 AT ONCE BEFORE PROCEEDING.
 COPYRIGHT ACT APPLIES





CONRAD ENERGY LIMITED
 UNIT 5 & 6, WINDMILL COURT, BLACKLAND WAY, ARBROTHOCK D94 1DP
 © 2022 CONRAD ENERGY LIMITED. ALL RIGHTS RESERVED.

Project Title:
 PROPOSED SYNCHRONOUS CONDENSER
 LAND OFF- LEYS LANE
 YAKLEY
 611791, 275017

Drawing Title:
LOCATION PLAN

Scale @ A0	Date	Drawn	Checked	Rev
1:1250	22.06.2022	HC	JC	B


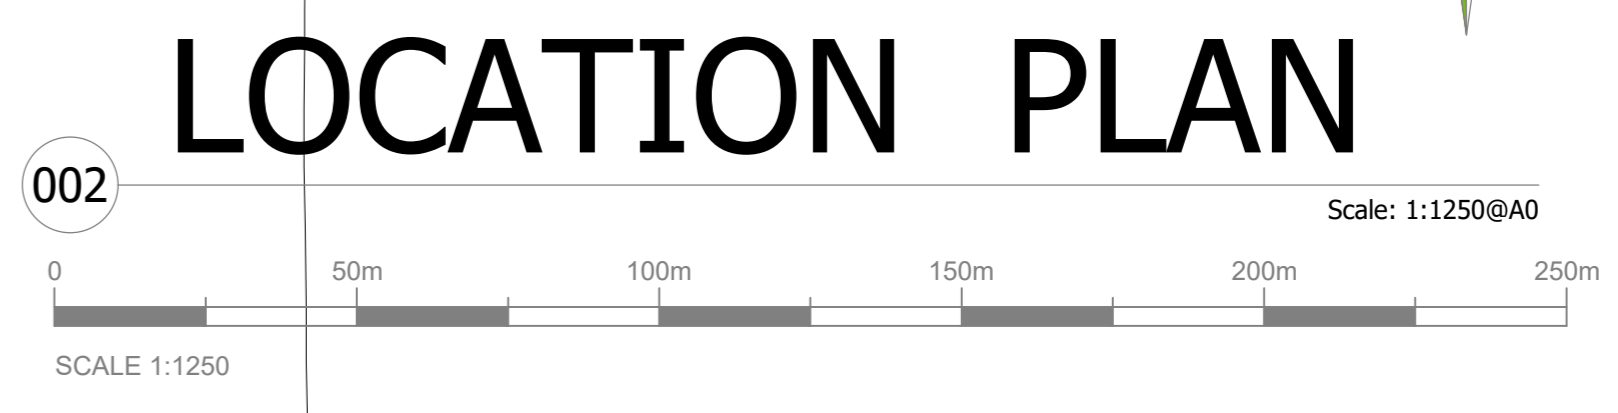
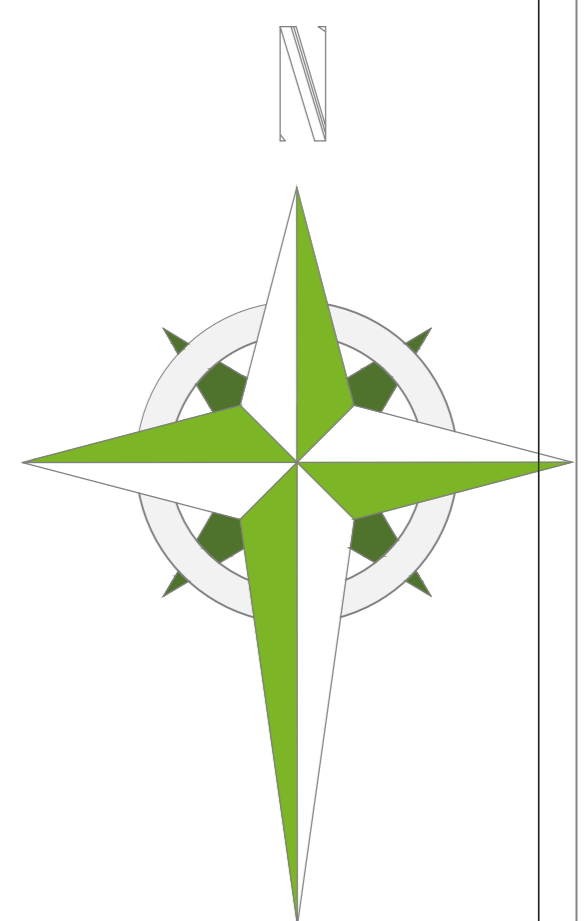


LOCATION PLAN

002

APPENDIX 2

MATERIAL/PLANT AREA PLAN

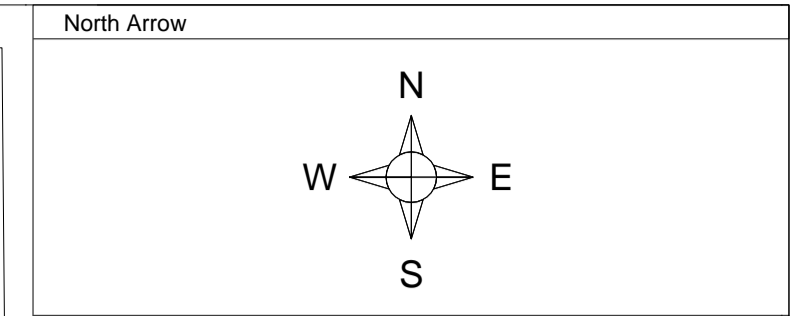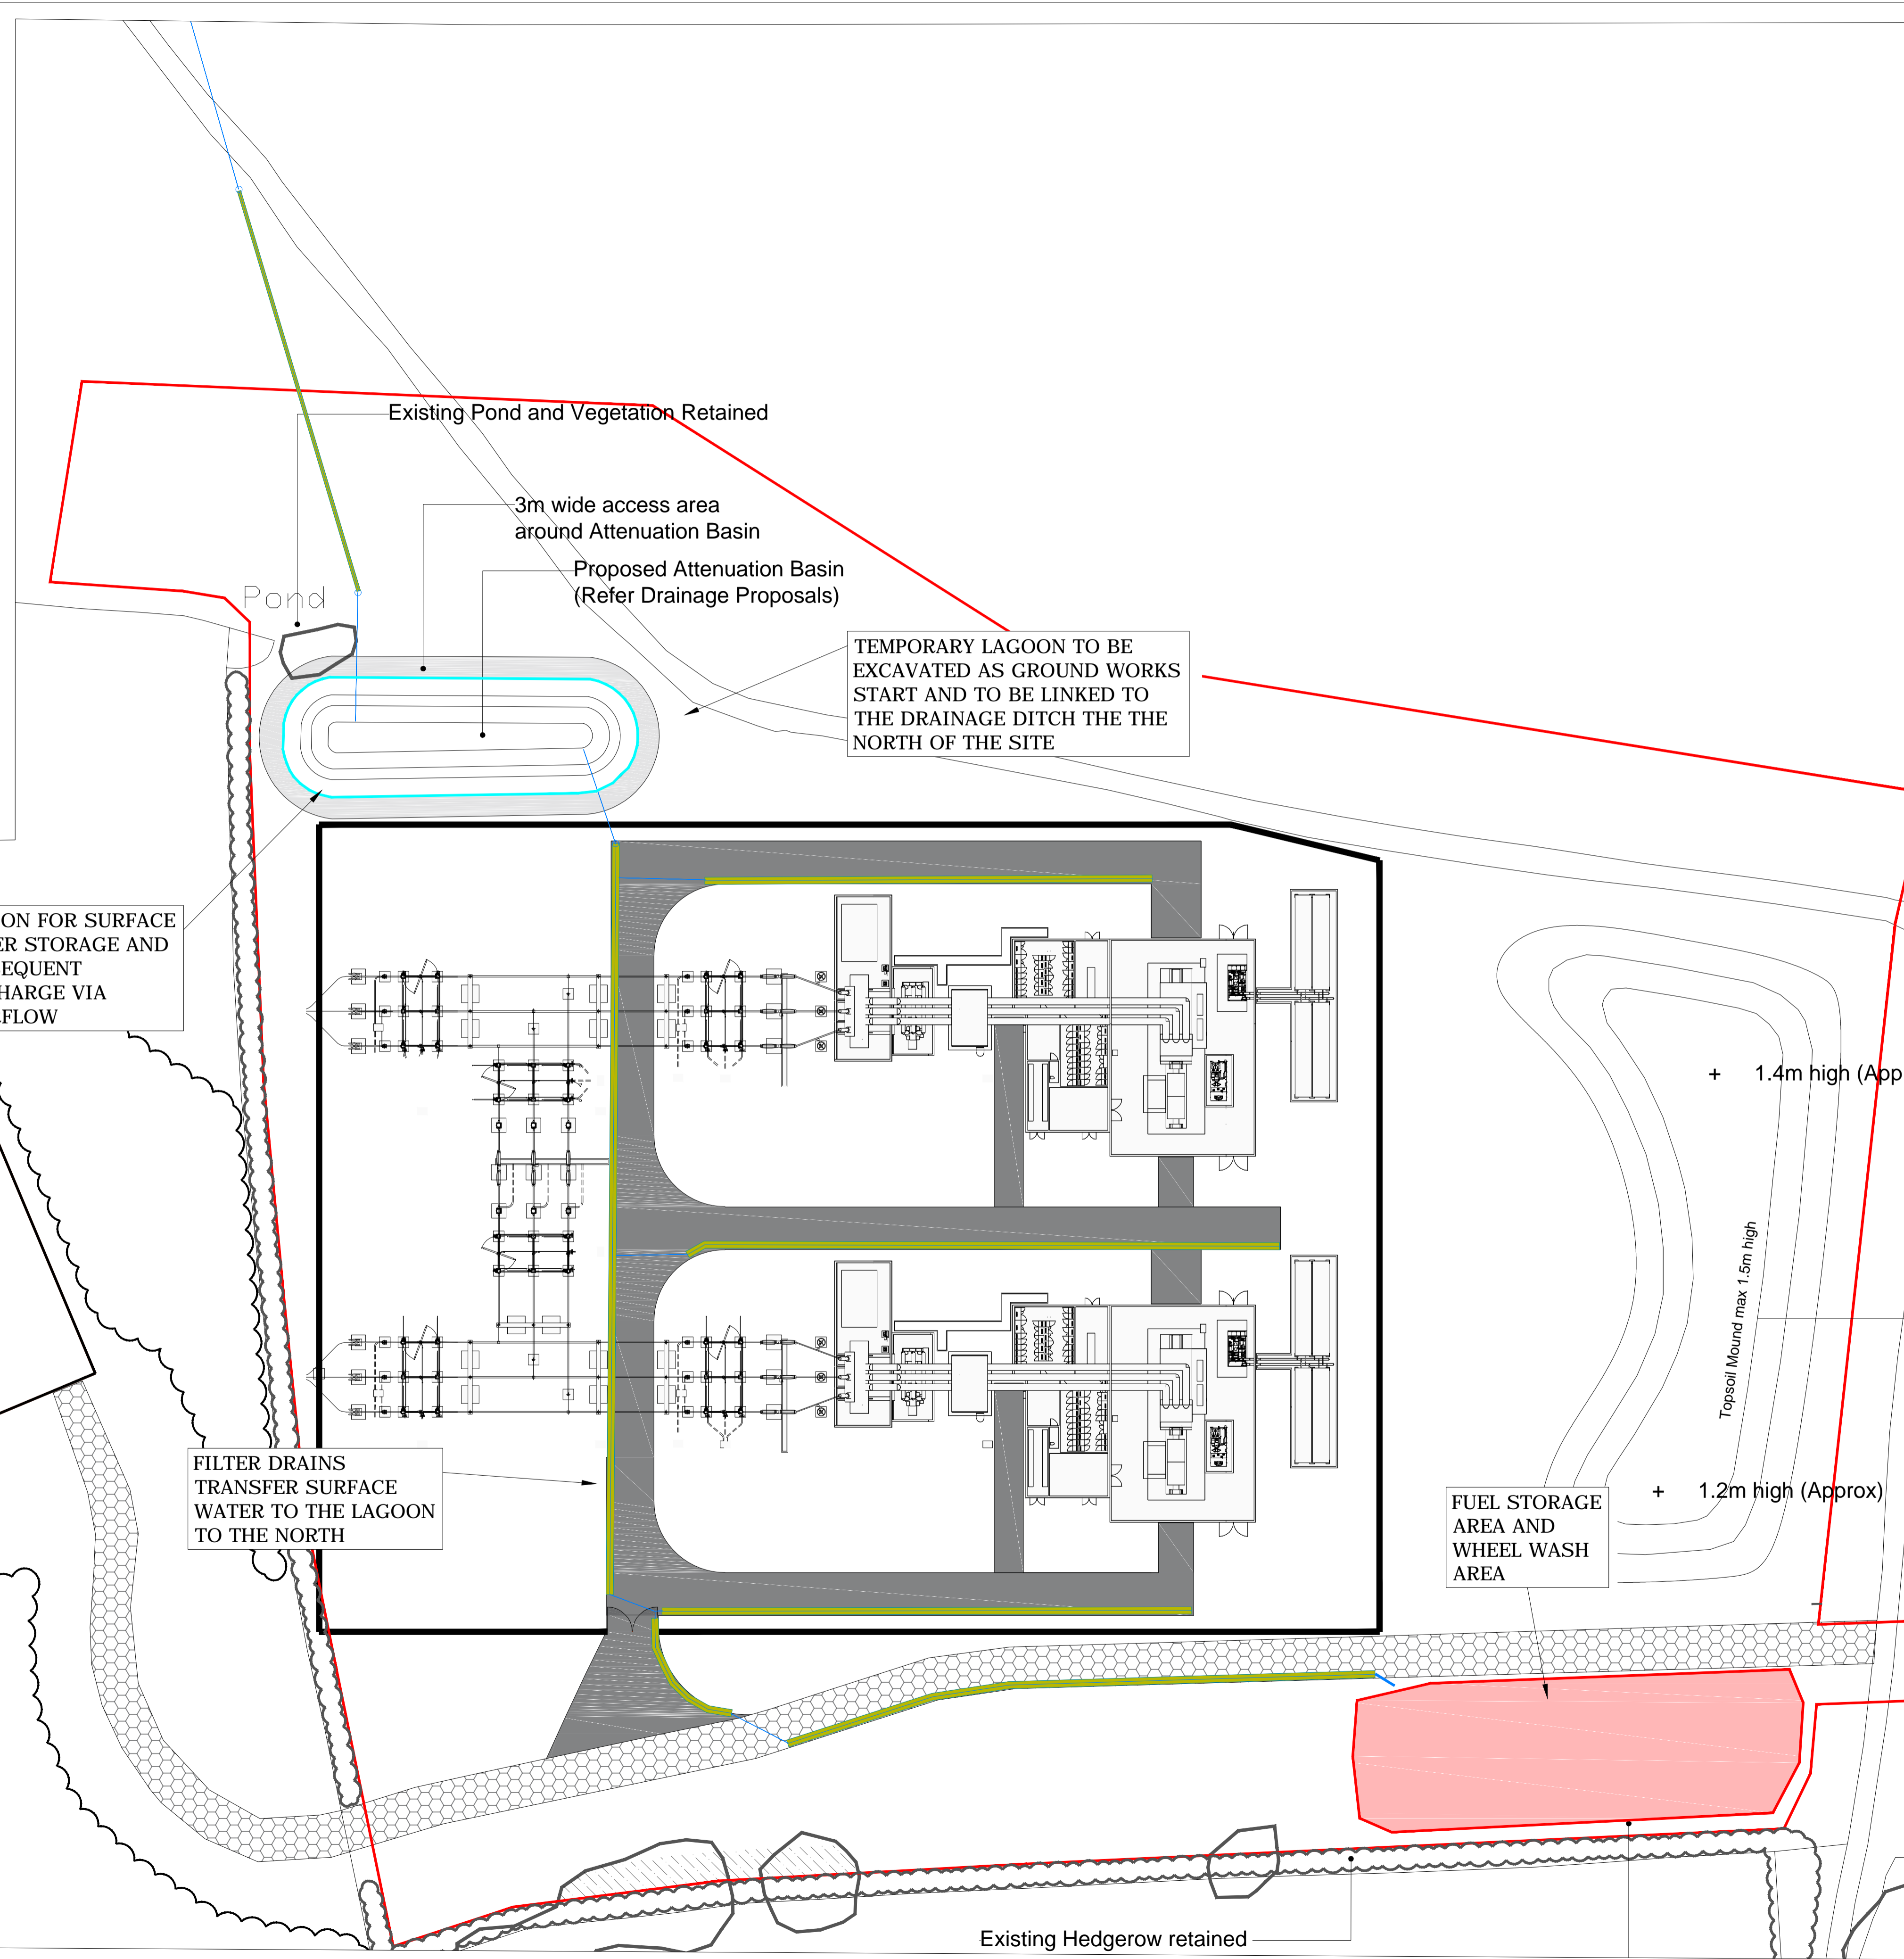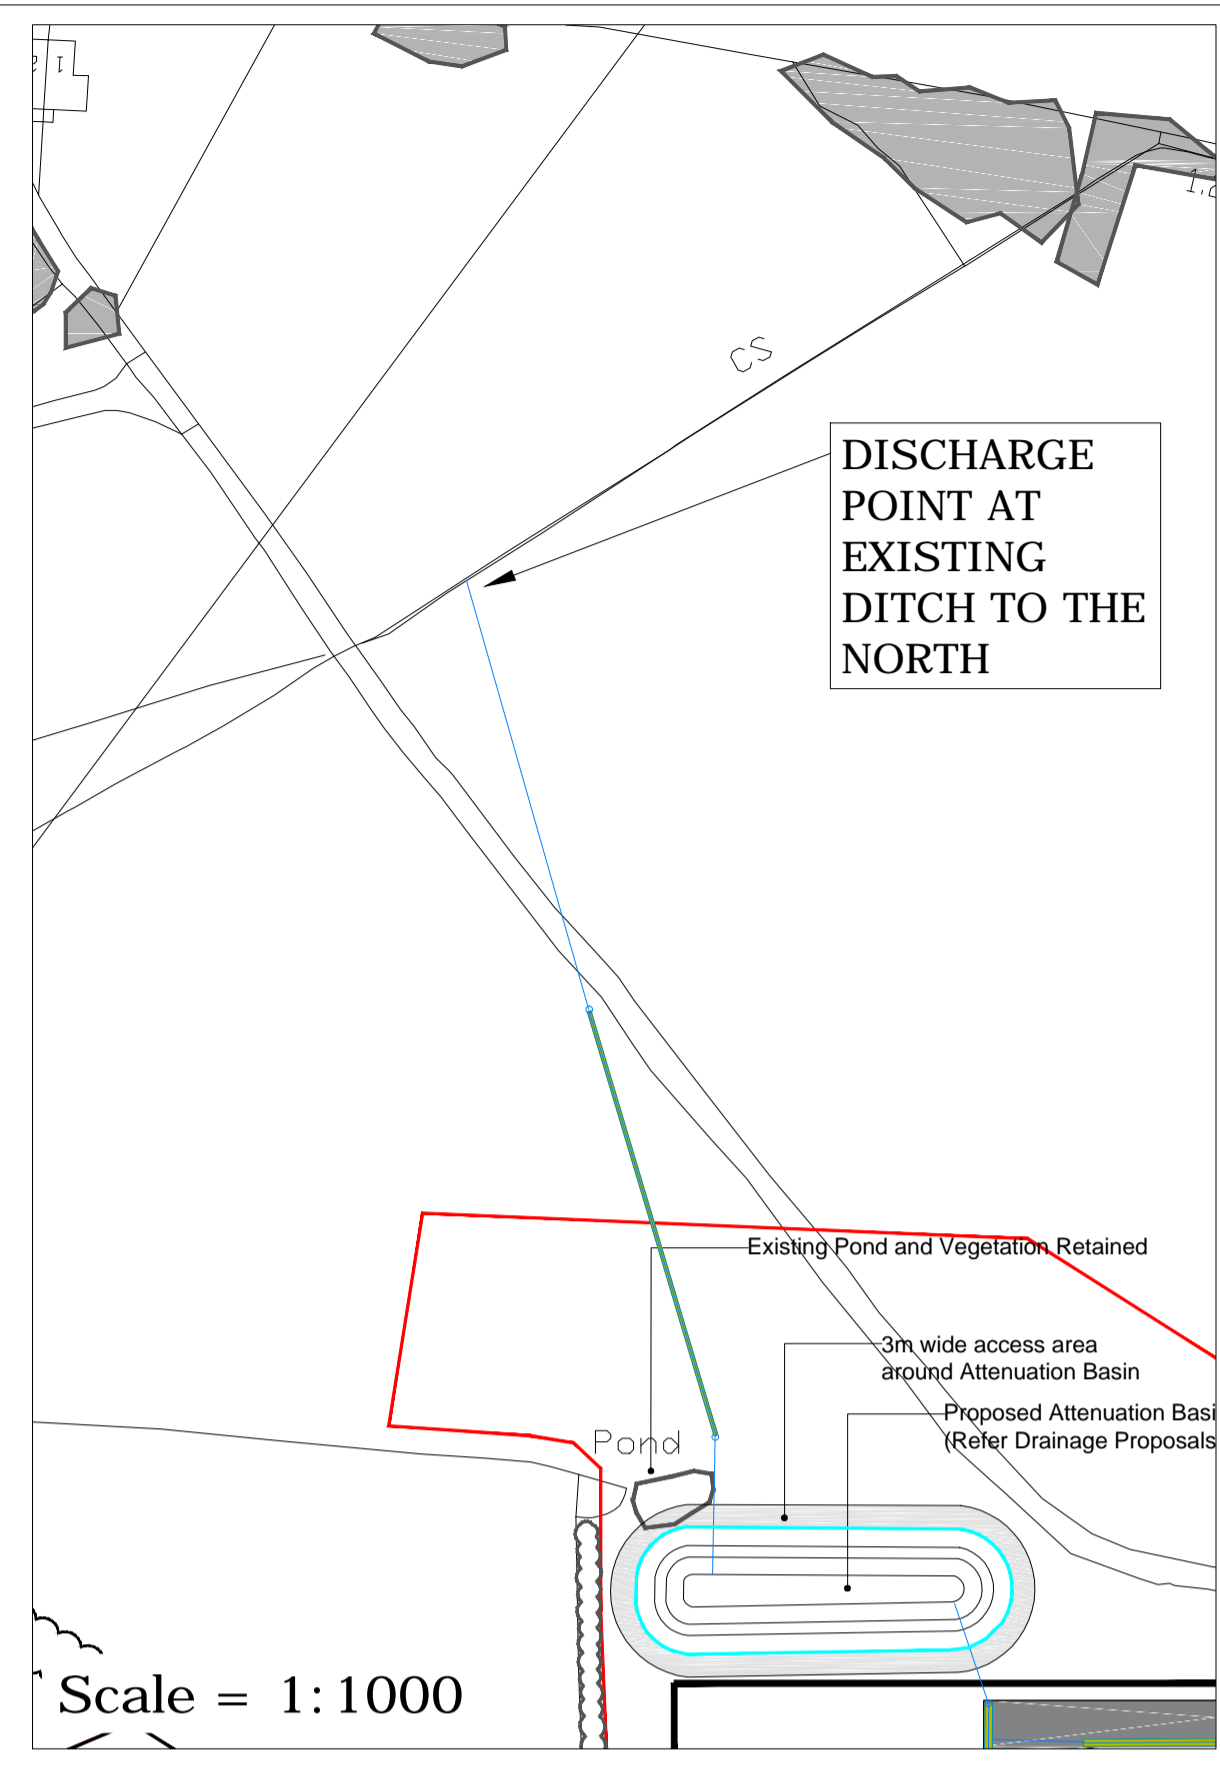

KEY

- Temporary Filter Drain
- Fuel Storage and Wheel Wash Area

PRELIMINARY DESIGN
NOT FOR CONSTRUCTION

REV	DATE	DESCRIPTION/REASON FOR ISSUE	APPR



MTC Engineering (Cambridge) Ltd.
Ground Floor, 24 High Street
Whittlesford, Cambridgeshire, CB22 4LT
Tel (01223) 837270, fax (01223) 835648
E-mail office@mtcengineering.co.uk

PROJECT
Leys and Ivy Farm, Yaxley, Suffolk

TITLE
Construction Surface Water Management Plan

ORIG	JF	DATE	15.05.23
CHKD		SCALE	AS SHOWN @ A1
APPR		DRAWING NO	3088-02
		REV	-

©This drawing and the works depicted are the copyright of MTC Engineering (Cambridge) Ltd and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

