


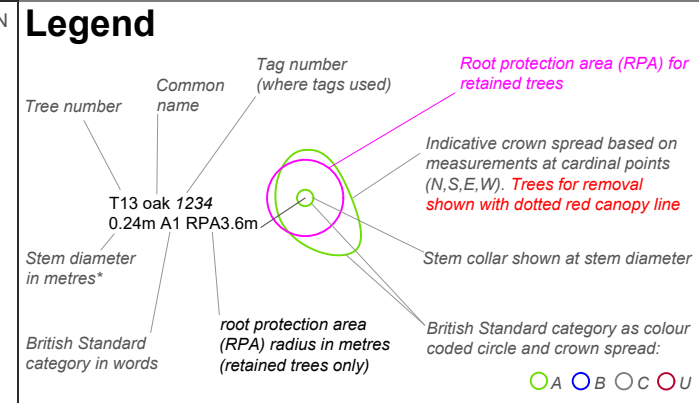
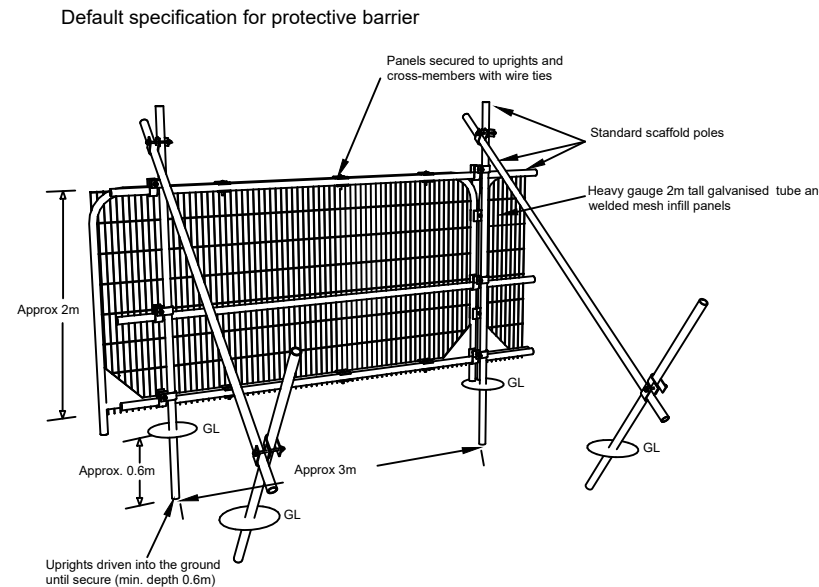
Drawing to be read in association with arboricultural impact appraisal and method statement. If in any doubt, details should be confirmed with project arboricultural consultant prior to commencement. Any work within root protection areas of trees should only commence following briefing from project arboricultural consultant. It should be confirmed that no legal restrictions, including (but not limited to) those imposed by Tree Preservation Order (TPO), conservation area, planning condition and/or protection orders, are in force before commencing ANY work recommended as part of this drawing, associated reports or verbal advice provided by the project arboricultural consultant.








**TREE PROTECTION AREA
KEEP OUT!**

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER. CONTRAVENTION OF A TREE PRESERVATION ORDER, MAY LEAD TO CRIMINAL PROSECUTION. THIS FENCING MUST NOT BE REMOVED WITHOUT PERMISSION FROM THE TREE AND LANDSCAPE OFFICER

THE ORIGINAL OF THIS DRAWING WAS PRODUCED IN COLOUR - A MONOCHROME COPY SHOULD NOT BE RELIED UPON





*where the tree is multi stemmed, the figure stated is the calculated combined stem diameter, as recommended by BS5837:2012 (unless otherwise stated in the drawing).

-  Proposed new development.
-  Tree Protection barrier - Protective fencing to BS5837:2012. Refer to BS5837 figure 2 and figure 3 as appropriate.
-  Precautions will be required during demolition to prevent damage to RPA and above ground parts of trees. Protective fencing may be relaxed to undertake operations following approval by project arborist and should be replaced once operation is completed. Refer to relevant sections of arboricultural impact appraisal and method statement.
-  Low impact foundation will be required within RPA to prevent damage to roots. Protective fencing may be relaxed to undertake operations following approval by project arborist and should be replaced once operation is completed. Refer to relevant sections of arboricultural impact appraisal and method statement.
-  Space restrictions will require ground protection capable of supporting the level of construction traffic entering the area (refer to guidance in text box within drawing). Refer to relevant sections of arboricultural impact appraisal and method statement.

Ground protection specification for different levels of construction traffic (after BS587:2012):

- Pedestrian movements - scaffold boards placed either on top of a driven scaffold frame to form a suspended walkway; or on top of a compression resistant layer of 100 mm depth of woodchip, laid onto a geotextile membrane;
- Plant (pedestrian operated up to 2 t gross weight) - proprietary, inter linked ground protection boards placed upon a compression resistant layer of 150 mm depth of woodchip, laid onto a geotextile membrane;
- Construction traffic (wheeled or tracked exceeding 2 t gross weight) - an alternative system (e.g. proprietary systems or pre cast reinforced concrete slabs) to an engineering specification designed in conjunction with the project arboricultural consultant, to accommodate the expected loading.

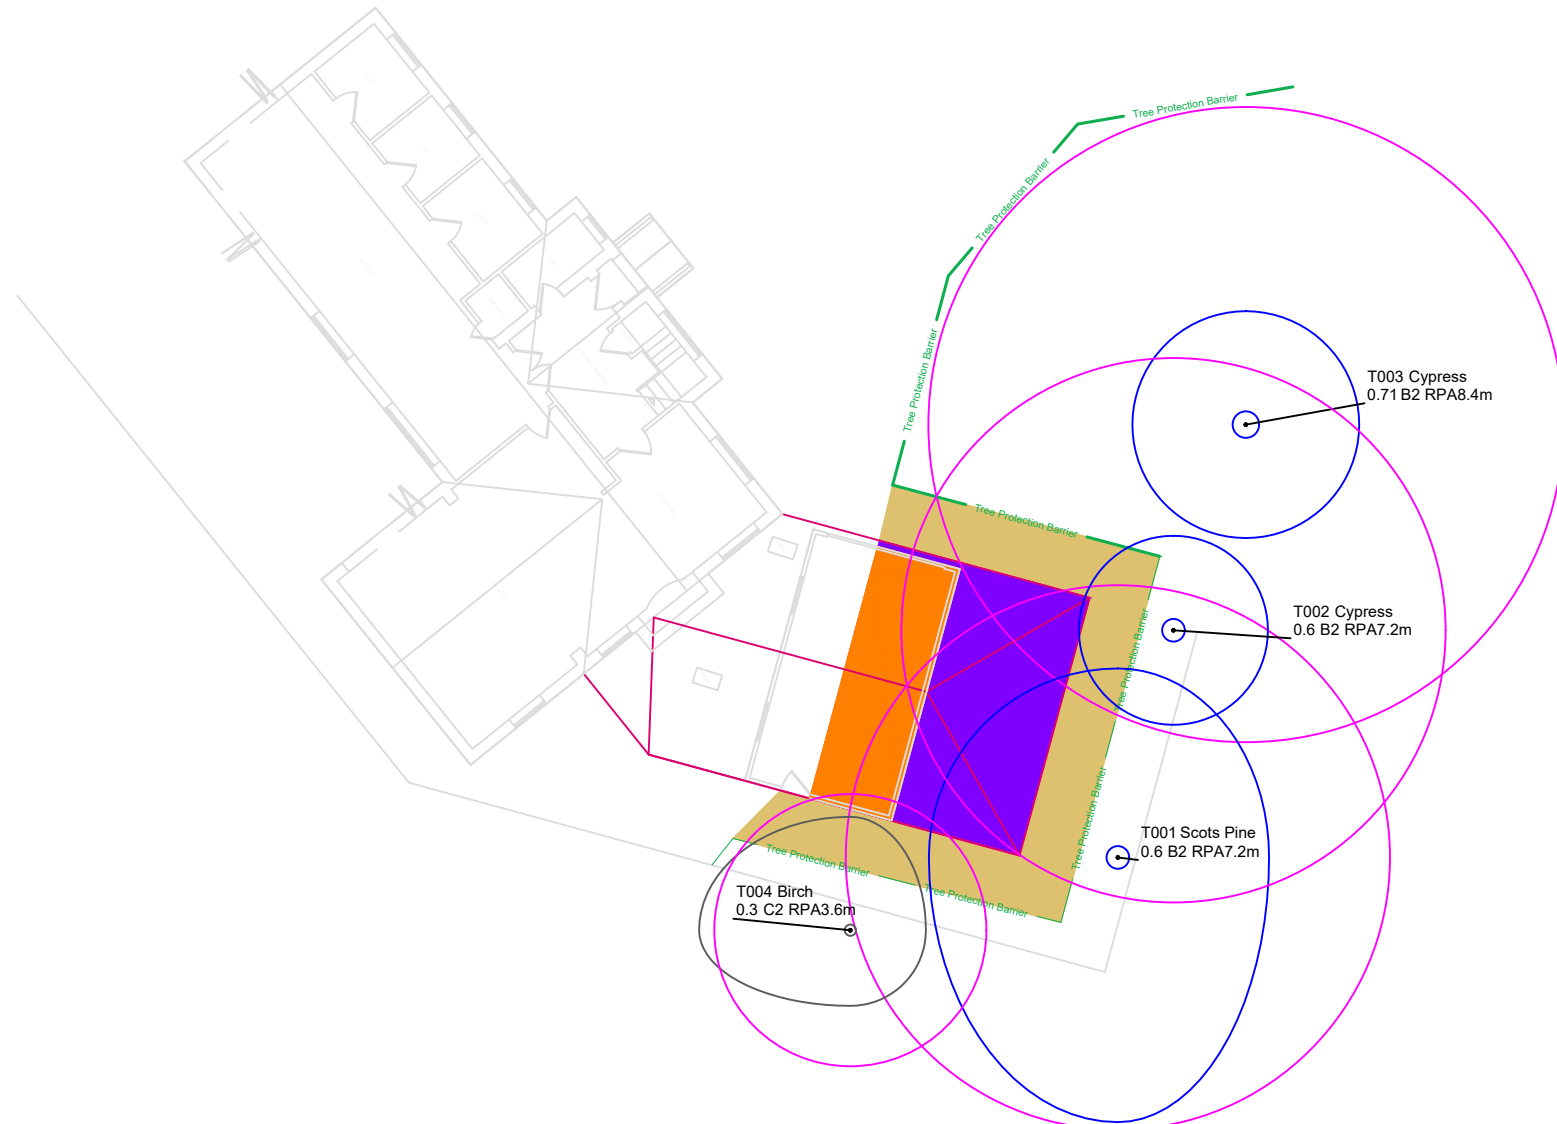

Arboricultural supervision

Minimum expectations:

- pre-commencement meeting - see box below.
- protective measures install/sign off
- demolition and hard surface removal in RPA.
- foundations in RPA.
- any other potentially damaging operations in RPA.

The above should be documented as part of an auditable system of arboricultural site monitoring by the project arboricultural consultant.

Refer to relevant sections of arboricultural impact appraisal and operation guidance in arboricultural method statement. If in doubt contact author of this document.

Important note

A **pre-commencement meeting** must be held on site before any development, demolition or site preparation works start.

The methods of tree protection outlined on this plan and within the associated arboricultural report should be fully discussed at this meeting so that all aspects of their implementation and sequencing are made clear to all parties.

Any clarifications or modifications must be recorded and circulated to all parties in writing.

SITE MANAGER - ENSURE NO OPERATIONS WITHIN RPA WITHOUT CONSULTATION WITH PROJECT ARBORICULTURAL CONSULTANT (INCLUDES ECOLOGICAL MEASURES SUCH AS REPTILE FENCING)

For planning purposes only unless otherwise authorised by author. Technical Arboriculture does not guarantee the accuracy of the information contained within this drawing. No liability for any loss whatsoever can be accepted as a result of the use of this drawing or any data or information taken from it or associated arboricultural impact appraisal, arboricultural method statement or tree survey schedule.


Technical Arboriculture
www.techarb.co.uk



Technical Arboriculture Limited
1 Chase Farm Close
Waltham Chase
Hampshire
SO32 2UB
01489 896 655 info@techarb.co.uk

PROJECT: High Corner, Chilworth
DATE: May 2023
JOB REF: AIA/AMS-KC/HIGHCORNER/001
DRAWING REF: TPP-KC/HIGHCORNER/001
DRAWN: KC
SCALE: 1:200 at A3
STATUS: Final
REVISION: 0

REVISION NOTES



TREE PROTECTION PLAN

TREE PROTECTION PLAN