

BS5837:2012
Tree Report



HERITAGE
TREE SPECIALISTS LTD

TREE SURGERY • FORESTRY

Proposed Development :

48 Nursery Lane
South Wootton
King's Lynn
PE30 3LR

Contents

Introduction

1.0 Site overview

2.0 Client instructions

3.0 Terms and definitions

4.0 Survey, Assessment & Plans

4.1 General

4.2 Survey

4.3 Soil assessment

4.4 Tree survey

4.5 Tree categorization method

4.6 Root protection area (RPA)

5.0 Arboricultural statements

5.1 Arboricultural Impact Assessment

5.2 Tree protection

5.3 New design

6.0 Method statements

6.1 Arboricultural method statement

6.2 Barriers and ground protection

7.0 Construction in proximity to existing trees

7.1 General

7.2 Avoiding physical damage to the roots during construction

7.3 Avoiding physical damage to the roots during demolition

7.4 Underground and above-ground utility apparatus

8.0 Site works, landscape operations and management

8.1 General

8.2 Drainage

8.3 Topsoil quality and amelioration

8.4 Soil compaction and remediation measures

8.5 Use of mulch

8.6 Hard surfaces

8.7 Use of herbicides

8.8 Tree management

Annexes

Annex A (informative) General advice for other interested parties

Annex B (informative) Trees and the planning system

Annex C Cascade chart for tree quality assessment

Plans

Arboricultural Implications & Tree Protection Plan

Introduction

Trees can offer many benefits, including:

- providing visual amenity, softening or complementing the effect of the built environment, and adding maturity to new developments;
- displaying seasonal change and providing opportunities for wildlife in built-up areas;
- making places more comfortable in tangible ways by contributing screening and shade, reducing wind speed and turbulence, intercepting snow and rainfall, and reducing glare.

Trees are also important elements of green infrastructure, contributing to urban cooling through evapo-transpiration and providing micro-climatic effects that can reduce energy demands in buildings. They therefore represent a key resource that can significantly contribute to climate change adaptation.

Existing trees are an important factor on construction sites, whether on or near the working areas, and trees are a material consideration in the UK planning system (see Annex B). This British Standard is intended to assist decision-making with regard to existing and proposed trees in the context of design, demolition and construction. Root systems, stems and canopies, with allowance for future movement and growth, need to be taken into account in all projects, including those that do not require planning permission. The space required for any proposed new trees to become established is an important consideration.

During their lifetime, trees will be vulnerable to disturbance, injury, environmental changes, pests and diseases. Construction work often exerts pressures on existing trees, as do changes in their immediate environment following the construction. A tree that has taken many decades to reach maturity can be damaged irreparably in a few minutes by actions that might be unwitting, negligent or wilful (see Annex A). The early provision of physical protection from damage is therefore critical.

Where tree retention or planting is proposed in conjunction with nearby construction, the objective should be to achieve a harmonious relationship between trees and structures that can be sustained in the long term. The good practice recommended in this British Standard is intended to assist in achieving this objective.

1 Site Overview

- 1.1 The area of proposed development is situated in the village of South Wootton. The site is bordered by residential property to the North East and South, and a road to the West.
- 1.2 There currently stands a detached bungalow on the site which is to be demolished in order to construct a detached dwelling.
- 1.3 Ground levels over the site and generally level.
- 1.4 The site currently comprises front and rear gardens, driveway, bungalow and garage.
- 1.5 The site is currently well screened along the southern boundary by a variety of mature trees and shrubs.

2 Client Instructions

2.1 Application

Our clients are currently in the process of submitting a planning application for the construction of a detached dwelling on the site and Heritage Tree Specialists Ltd have been asked to provide a BS5837 Tree Report for inclusion with the application.

2.2 Our instructions have come via Wayne Skipper at Strata Architecture, 3 Emmas Court, Burnham Market, Norfolk, PE31 8HD

2.3 We have been provided with a proposed site layout by Strata Architecture

3 Terms and definitions

For the purposes of this British Standard, the following terms and definitions apply.

3.1 access facilitation pruning

one-off tree pruning operation, the nature and effects of which are without significant adverse impact on tree physiology or amenity value, which is directly necessary to provide access for operations on site

3.2 arboricultural method statement

methodology for the implementation of any aspect of development that is within the root protection area (3.7), or has the potential to result in loss of or damage to a tree to be retained

3.3 arboriculturist

person who has, through relevant education, training and experience, gained expertise in the field of trees in relation to construction

3.4 competent person

person who has training and experience relevant to the matter being addressed and an understanding of the requirements of the particular task being approached

NOTE A competent person is expected to be able to advise on the best means by which the recommendations of this British Standard may be implemented.

3.5 construction

site-based operations with the potential to affect existing trees

3.6 construction exclusion zone

area based on the root protection area (3.7) from which access is prohibited for the duration of a project

3.7 root protection area (RPA)

layout design tool indicating the minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the tree's viability, and where the protection of the roots and soil structure is treated as a priority

3.8 service

any above- or below-ground structure or apparatus required for utility provision

NOTE Examples include drainage, gas supplies, ground source heat pumps, CCTV and satellite communications.

3.9 stem

principal above-ground structural component(s) of a tree that supports its branches

3.10 structure

manufactured object, such as a building, carriageway, path, wall, service run, and built or excavated earthwork

3.11 tree protection plan

scale drawing, informed by descriptive text where necessary, based upon the finalized proposals, showing trees for retention and illustrating the tree and landscape protection measures

3.12 veteran tree

tree that, by recognized criteria, shows features of biological, cultural or aesthetic value that are characteristic of, but not exclusive to, individuals surviving beyond the typical age range for the species concerned

NOTE These characteristics might typically include a large girth, signs of crown retrenchment and hollowing of the stem.

4 Survey, Assessment & Plans

4.1 General

The Plan included is designed to show:

- the location of individual trees and groups in relation to the proposed layout
- the extent of Root Protection Areas
- the location of physical protection barriers and (if required) ground protection
- current dwelling footprint in relation to that proposed

4.2 Survey

4.2.1 The survey carried out by Heritage Tree Specialists Ltd includes:

a) the position of all trees within the site with a stem diameter of 75 mm or more (see Note), measured at 1.5 m above highest adjacent ground level;

NOTE In the case of woodlands or substantial tree groups, only individual trees with stem diameters greater than 150 mm usually need be plotted.

b) the position of trees with an estimated stem diameter of 75 mm or more that overhang the site or are located beyond the site boundaries within a distance of up to 12 times their estimated stem diameter;

c) for individual trees, the crown spread taken at four cardinal points; for woodlands or substantial tree groups, the overall extent of the canopy;

d) the extent, basal ground levels and height of shrub masses, hedges, hedgerows and stumps;

e) other relevant landscape features and artefacts, such as streams, buildings and other structures, boundary features and means of enclosure, trenching scars near to trees, and overhead and underground utility apparatus, including drainage runs with manholes and invert levels.

4.3 Soil assessment

4.3.1 Heritage Tree Specialists Ltd has not carried out a soil assessment. Soil assessment is recommended as soil type may have an impact upon the following:

- new planting design; and
- foundation design to take account of retained, removed and new trees.

4.3.2 The assessment should determine whether the soil is shrinkable. If it is, trees and other vegetation have the potential to cause indirect damage to structures (see Annex A). In such cases, desiccation assessments should be carried

out at a specialist laboratory to check the extent to which existing vegetation has dehydrated the soil.

4.3.3 Soil structure, composition and pH should be included in the assessment for the purpose of designing new planting and landscape proposals.

4.4 Tree survey

4.4.1 Timing

A tree survey was carried out on 11th March 2020 by Heritage Tree Specialists Ltd. Weather conditions were clear. Trees were not in leaf.

4.4.2 Parameters

4.4.2.1 The tree survey includes all trees on the site and additional off-site trees that could have an effect on foundation design (**see Annex A**). The trees are sequentially numbered.

4.4.2.2 Individual trees, groups of trees and woodlands have been assessed for their quality and benefits within the context of proposed development. The quality of each tree or group of trees has been recorded by allocating it to one of four categories. The categories are differentiated on the tree survey plan by colours and/or by suffixing the category adjacent to the tree identification number on the tree survey plan

4.4.2.3 Trees growing as groups or woodland have been identified and assessed as such where the arboriculturist determines that this is appropriate. However, an assessment of individuals within any group has been undertaken if there is a need to differentiate between them, e.g. in order to highlight significant variation in attributes (including physiological or structural condition).

NOTE The term "group" is intended to identify trees that form cohesive arboricultural features either aerodynamically (e.g. trees that provide companion shelter), visually (e.g. avenues or screens) or culturally, including for biodiversity (e.g. parkland or wood pasture), in respect of each of the three subcategories.

4.4.2.4 The categorization of a group or woodland can reflect a future potential that is contingent on appropriate management being undertaken to promote the development of the better specimens, based upon established arboricultural and silvicultural principles.

4.4.2.5 A schedule to the survey lists all the trees or groups of trees. The following information has been recorded :

- a) sequential reference number (to be recorded on the tree survey plan);
- b) species listed by common name;
- c) height;
- d) stem diameter, measured in accordance with Annex C.

- e) branch spread, taken as a minimum at the four cardinal points, to derive an accurate representation of the crown ;
- f) existing height above ground level of first significant branch and direction of growth (e.g. 2.4-N), and canopy
- g) life stage (e.g. young, semi-mature, early mature, mature, over-mature);
- h) general observations, particularly of structural and/or physiological condition
- i) estimated remaining contribution, in years (<10, 10+, 20+, 40+);
- j) category U or A to C grading to be record on the tree survey plan.

NOTE 1 It is not always practical or necessary to record branch spread for every tree within a group or woodland.

NOTE 2 In some cases, layout design might be aided by the arboriculturist providing data on future tree height and crown spread.

4.4.2.6 The measurement conventions are as follows.

- a) height, crown spread and crown clearance is recorded to the nearest half metre (crown spread should be rounded up) for dimensions up to 10 m and the nearest whole metre for dimensions over 10 m;
- b) stem diameter is recorded in millimetres, rounded to the nearest 10 mm (0.01 m);
- c) estimated dimensions (e.g. for off-site or otherwise inaccessible trees where accurate data cannot be recovered) is clearly identified as such (e.g. suffixed with a "#").

4.4.2.7 Relevant details of shrub masses, hedges, hedgerows and stumps are recorded .

4.4.2.8 Hedgerows and substantial internal or boundary hedges (including evergreen screens) are recorded in a similar fashion to groups, with the lateral spread and average (or maximum and minimum) height and stem diameter ranges recorded, to allow the potential constraints associated with the features to be fully assessed. All woody species present are recorded. Where woody plants are present within a hedgerow that are significantly different in character from the remainder of it, these should be identified and recorded separately, especially where they comprise distinct trees.

4.4.2.9 On shrinkable soils (known or suspected), if it is evident that trees or substantial stems have been removed from a hedgerow, this is recorded, along with any apparent signs of past management, such as laying or significant

height reduction. Such information can be of particular relevance to foundation design, where the current species composition and dimensions might not reflect the previous influence of a hedgerow on ground moisture levels.

Tree Ref No.	Species	Height m	Stem Diameter mm	Branch Spread m	Height of Crown Clearance m	Age Class Young / Middle / Mature / Over Mature / Veteran	Physiological Condition Good / Fair / Poor / Dead	Structural Condition Collapse / Decay / Defects	Management Recommendations and Category Grading	Estimated remaining contribution Years
T1	Silver Birch	12	600	N 5.0 E 4.0 S 1.5 W 2.0	2	Mature	Fair	Deadwood present	Remove deadwood. C2	10-20
T2	Willow	10	1200	N 3.0 E 5.0 S 4.0 W 6.0	2.5	Mature	Poor	Ivy Clad stem. Major deadwood	Pollard at 6 metres height C2	10-20
T3	Blackthorn	5	210	N - E - S 1.0 W 2.0	2	Mature	Fair	Asymmetrical crown Ivy clad stem	Sever Ivy C2	20-40
T4	Silver Birch	10	540	N 2.5 E 2.0 S 1.5 W 2.5	3	Mature	Poor	In decline	Remove Tree U	-
T5	Scots Pine	15	320	N 2.0 E 2.0 S 2.5 W 3.0	4	Mature	Fair	Minor Deadwood in the crown	Remove deadwood C2	20-40
T6	Scots Pine	17	510	N 5.0 E 2.0 S 4.5 W 4.5	4	Mature	Fair	Deadwood in the crown	Remove deadwood C2	20-40
T7	Scots Pine	14	500	N 5.0 E 3.0 S 5.0	4	Mature	Fair	Deadwood present	Remove deadwood & remove lowest	20-40

				W 3.0					limb to the North C2	
T8	Scots Pine	17	470	N 4.0 E 2.0 S 5.0 W 2.0	4	Mature	Fair	Minor deadwood	Remove deadwood C2	-
T9	Wellingtonia	25	1040	N 3.5 E 3.0 S 5.0 W 3.0	6	Mature	Fair	Significant lean to the South	Reduce height by 5 metres to reduce crown weight B2	40+
T10	Sweet Chestnut	15	680	N 5.0 E 3.5 S 5.0 W 3.0	4	Mature	Good	Deadwood within the crown	Remove deadwood B2	40+-
T11	Scots Pine	9.5	420	N - E 2.5 S 2.5 W 1.0	5	Mature	Fair	Wind damaged crown. Supressed by neighbouring trees	Remove C2	-
T12	Leyland Cypress	12	420	N 2.0 E 2.0 S 2.0 W 2.0	2	Mature	Good	Good	Retain B2	20-40-
T13	Pear	4	220	N 3.0 E 2.0 S 1.0 W 2.0	1	Mature	Good	Good	Retain B1	20-40
T14	Holly	7	240	N 2.0 E 2.0 S 2.0 W 2.0	-	Mature	Good	Good	Reduce to 4 metres height C2	20-40

T15	Holly	8	250	N 2.0 E 2.0 S 1.0 W 1.0	3	Mature	Good	Good	Reduce to 4 metres height C2	20-40
T16	Cedar	5.5	90	N 1.0 E - S - W -	3	Young	Good	Leans to North	Remove C2	-
T17	Holly	270	7	N 1.0 E 1.0 S 1.0 W 1.0	3	Mature	Good	-	Reduce to 4 metres height C2	20-40
T18	Holly	200	8	N 1.0 E 1.0 S 1.0 W 1.0	2	Mature	Good	-	Reduce to 4 metres height C2	20-40
T19	Holly	150	8	N 1.0 E 1.0 S 1.0 W 1.0	-	Mature	Good	-	Reduce to 4 metres height C2	20-40
T20	Holly	210	6	N 1.0 E 1.0 S 1.0 W 1.0	2	Mature	Good	-	Reduce to 4 metres height C2	20-40
T21	Holly	180	8	N 1.0 E 1.0 S 1.0 W 1.0	3	Mature	Good		Reduce to 4 metres height C2	20-40

4.5 Tree categorization method

4.5.1 As part of the tree survey (**see 4.4**), trees have been categorized using the criteria shown in Table 1.

NOTE The means of identifying each category on the tree survey plan is shown in Table 2.

4.5.2 The purpose of the tree categorization method is to identify the quality and value (in a non-fiscal sense) of the existing tree stock, allowing informed decisions to be made concerning which trees should be removed or retained in the event of development occurring.

4.5.3 For a tree to qualify under any given category, it should fall within the scope of that category's definition (U, A, B, C) and, for trees in categories A to C, it should qualify under one or more of the three subcategories (1, 2, 3). Subcategories 1, 2 and 3 are intended to reflect arboricultural and landscape qualities, and cultural values, respectively.

4.5.4 The tree survey schedule lists which subcategory applies. It is intended that each subcategory has equal weight such that, for example, an A1 tree has the same retention priority as an A2 tree. Some trees could qualify under more than one criterion.

4.5.5 When determining the appropriate category for any given tree, group or woodland (see 4.4), the arboriculturist considers whether the tree falls within the scope of category U. Assuming that it does not, the arboriculturist should then proceed on the presumption that all trees are considered according to the criteria for inclusion in category A. Trees that do not meet these criteria should then be considered in light of the criteria for inclusion in category B. This process should be repeated, as required, until the appropriate quality or value assessment is reached.

4.5.6 Trees of generally high quality and/or value which have a defect or defects that do not reduce their retention span below the suggested 40 year threshold, are placed in category A, i.e. they are not downgraded as a result of minor imperfections.

4.5.7 Where trees would otherwise be categorized as U, but have identifiable conservation, heritage or landscape value, even though only for the short term, they may be upgraded, although they might be suitable for retention only where issues concerning their safety can be appropriately managed.

4.5.8 When categorizing a tree, the presence of any serious disease or tree-related hazards is taken into account. If disease is likely to be fatal or irremediable, or likely to require sanitation for the protection of other trees, it might be appropriate for the trees concerned to be categorized as U, even if they otherwise have considerable value. If structural defects present an unacceptable risk to people or property, the extent to which the defects are remediable, including the effect that this might have on the tree's remaining

value influence whether the tree be assigned to the category that it would otherwise merit.

4.6 Root protection area (RPA)

4.6.1 For single stem trees, the RPA (**see 3.7**) is calculated as an area equivalent to a circle with a radius 12 times the stem diameter.

4.6.2 The RPA of all retained trees has been plotted on a Plan which is included in this report.

4.6.3 The individual RPA's of retained trees on this site are as follows:

Tree No.	Species	Category	S or MS	Stem Diameter (mm)	Minimum radius of root protection (m)	Minimum Root Protection Area (m ²)
T1	Silver Birch	C	S	600	7.2	162
T2	Willow	C	S	1200	14.4	652
T3	Blackthorn	C	S	210	2.4	18
T5	Scots Pine	B	S	320	3.9	48
T6	Scots Pine	B	S	510	6.0	113
T7	Scots Pine	B	S	500	6.0	113
T8	Scots Pine	B	S	470	5.7	102
T9	Wellingtonia	B	S	1040	12.6	499
T10	Sweet Chestnut	B	S	680	8.1	206
T12	Leyland Cypress	B	S	420	5.1	81
T13	Pear	B	S	220	2.7	23
T14	Holly	C	S	240	3.0	28
T15	Holly	C	S	250	3.0	28
T17	Holly	C	S	270	3.3	34
T18	Holly	C	S	200	2.4	18
T19	Holly	C	S	150	1.8	10
T20	Holly	C	S	210	2.4	18
T21	Holly	C	S	180	2.1	14

5 Arboricultural Statements

5.1 Arboricultural impact assessment

5.1.1 All trees included within this report have been assessed. Full details are included within the Tree Assessment (Section 4.0) and all trees are plotted on the plan.

5.1.2 Tree Removal

The proposed development does not require the removal of any trees assessed but we recommend that several trees on the site and within close proximity to the boundary be removed:

T4 (Silver Birch) is situated adjacent to the front driveway and is in serious decline. This tree should be removed.

T11 (Scots Pine) is situated on the boundary with no. 46. This tree has suffered wind damage in the past and is also suppressed by larger neighbouring trees. We recommend that this tree be removed.

T16 (Cedar) is a young tree which is leaning excessively and we recommend that this tree be removed.

5.1.3 Additional Tree Work

T1 (Silver Birch) is situated on the verge to the front of the property and the crown contains some deadwood which should be removed.

T2 (Willow) is a mature tree overhanging the road and the crown contains significant deadwood. We recommend that this tree be pollarded at approximately 6 metres height, removing deadwood. Ivy should also be severed at the base of this tree and allowed to die back.

T3 (Blackthorn) has ivy on the main stem which should be severed and allowed to die back.

T5, T6 and T8 (Scots Pine) should have deadwood removed from the crown, as should T7 (Scots Pine) which should also have the lowest limb (North side) removed to minimise end weight and provide clearance from the proposed dwelling.

T9 (Wellingtonia) is a very prominent, mature tree with a significant lean to the South. We recommend that this tree be reduced in height by at least 5 metres in order to reduce crown weight and the lean should be monitored as the tree is within close proximity to dwellings.

T10 (Sweet Chestnut) is a mature tree in good health generally. We suggest, however, that any deadwood be removed from the crown.

T14, T15 and T17 to T21 are all Holly which border the front garden. These trees provide an excellent screen between the two properties and we recommend that they be reduced to a height of 4 metres in order to ease future management.

5.2 Tree protection

5.2.1 The tree protection plan is included in this report and shows all hard surfacing and other structures within the RPA.

5.2.2 The plan indicates the precise location of protective barriers to be erected to form a construction exclusion zone around the retained trees. It also shows the extent and type of ground protection, and any additional physical measures, such as tree protection boxes, that will need to be installed to safeguard vulnerable sections of trees and their RPAs where construction activity cannot be fully or permanently excluded.

5.2.3 To avoid disturbance to the physical protection, once installed, the following guidelines should be followed:

Access to and from the site is to be via the existing access point at Nursery Lane. Vehicles and construction plant must not breach any physical protection barrier.

Construction activity within 1 metre of any physical protection barrier is to be carried out, carefully, using hand tools and low impact machinery.

Contractors vehicles are to be parked on hard surfacing and never closer than 1 metre from the Physical Protection Barrier.

Physical Protection Barriers have been set back in order to allow construction of the proposed dwelling

Construction and excavation work carried out within 1 metre of the Physical Protection Barrier must be carried out in accordance with Method Statements laid out in this report.

Cranes and construction plant is to work from open ground and must not breach any physical protection barrier

Scaffolding may be installed up to 1 metre from physical protection barriers

Any temporary latrines etc are to be situated no closer than 3 metres from Tree Protection Barrier in order to avoid damage during placement and removal.

Materials associated with the building works are not to be stored within 3 metres of the Physical Protection Barrier. This will minimise the risk of damage to the Root Protection Areas or crowns when loading and unloading. Furthermore, this will also minimise any risks of damage to tree roots through contamination due to spillages etc.

5.3 New planting design and associated landscape operations

Guidelines

All new tree planting proposals are an essential consideration in the layout, design and future use of a development site, the local landscape character and the contextual surroundings. As trees generally form the dominant elements of the long-term landscape structure of a site, careful consideration needs to be given to their ultimate height and spread, form, habit and colour, density of foliage and maintenance implications, in relation to both the built form of the new development, and the retained landscape features.

Trees, either individually or as formal or informal groups, perform a variety of functional roles that can be exploited by a well-designed landscape. These include:

a) contributions to green infrastructure networks, of particular importance in built-up areas;

b) the inherent aesthetic attractiveness of trees as prominent landscape

- architectural features;
- c) screening of undesirable views and provision of privacy;
- d) articulation and definition of spaces;
- e) definition and direction of routes and views;
- f) introduction of natural character and seasonal change that can relieve or complement artificial environments;
- g) reflection of local landscape character and providing a sense of place, sometimes as significant landmarks;
- h) control of soil erosion, attenuation of surface water run-off and mitigation of flood risk, through root system reinforcement and canopy interception of precipitation.

Many of these factors can provide a significant enhancement to the value of property. This is reflected in research carried out by CABE [7] and in anecdotal evidence of high property values in well-treed areas.

5.3.1 General

The purpose of proposed new planting should be understood from the start of the design process so that long-term structural landscape objectives inform decisions regarding appropriate locations and species. Advice on detailed design and how this would integrate with proposed development infrastructure should be sought from a landscape architect or other competent person.

5.3.2 New planting adjacent to structures

5.3.2.1 New planting should normally be selected and located to ensure that adequate space is allowed for future growth of root systems (**see Table A.1**), stems and canopies to maturity, without this causing direct physical contact with and potential direct damage to nearby structures, or causing obstruction of access, light or other avoidable nuisance. Exceptions could include planned short-term planting.

5.3.2.2 Paths, patios and driveways can be vulnerable to damage by trees. Design decisions should take into account the known habits of tree species and/or options for flexible pavings or other appropriate hard landscape specifications.

5.3.2.3 On shrinkable clay soils, account should be taken of the risk of subsidence that might be caused or exacerbated by new planting removing moisture from load-bearing soils.

5.3.2.4 The foundation construction and condition of existing structures, especially on shrinkable clay soils, should be a determining factor when taking decisions on species and location for new plantings, to minimize subsidence risks

and to seek compatibility between structures and trees.

5.3.2.5 In the case of new structures, especially on shrinkable soils, the design and construction of foundations should be undertaken in conjunction with planting proposals to minimize the risks of structural movement, taking account of the possibility of periods of prolonged drought associated with climate change. It is therefore important to ensure that foundation design of permanent structures follows up-to-date guidance. Expert advice should be sought as necessary.

5.3.2.6 The obstruction of light and views, the creation of shade by new trees, and the likely extent and density of tree crowns when fully grown, should be taken into account when designing new planting adjacent to buildings. Design and species selection should allow the enjoyment of reasonable light and shading where desirable as the trees develop into mature specimens.

NOTE An appropriate balance of views and screening should be provided. The planting of large and/or fast-growing evergreen trees as screens or hedging could lead to the unacceptable obstruction of light all year round and might therefore be unsuited to nearby residential accommodation.

5.3.3 New planting adjacent to roads

Roadside trees can make a significant contribution to the character of new developments. They are of increasing importance as green infrastructure elements in existing built-up areas, providing shade, shelter, urban cooling and biodiversity benefits. Their siting and species selection should be carefully coordinated at an early stage with other aspects of highway design and, in the case of adopted roads, with the agreement of the relevant highway authority. Sight line requirements, lighting schemes, CCTV, underground and overhead service routes and avoidance of physical obstruction or damage should all be taken into account, with due consideration for future growth and periodic maintenance requirements.

5.3.4 New planting in the vicinity of underground utility apparatus and overhead cables

Trees should not be planted where they might obstruct overhead power lines or cables. In new developments, early consultation and cooperation between the developer and the utility company is essential, and proposed service routes should be coordinated with the landscape design proposals. Underground apparatus should be ducted or otherwise protected at the time of construction to enable trees to be planted nearby without conflict. Wherever possible, common service trenches should be specified to minimize the land take associated with underground services and to facilitate future maintenance.

NOTE Further guidance is given in Volume 4 of the NJUG guidelines [N1].

6 Method statements

6.1 Arboricultural method statement

The following methods are to be followed in order to minimise damage to any retained trees on the site prior to, during and following construction.

6.2 Barriers and ground protection

6.2.1 General

6.2.1.1 All trees that are being retained on site should be protected by barriers and/or ground protection before any materials or machinery are brought onto the site, and before any demolition, development or stripping of soil commences. Where all activity can be excluded from the RPA, vertical barriers are to be erected to create a construction exclusion zone. Where, due to site constraints, construction activity cannot be fully or permanently excluded in this manner from all or part of a tree's RPA, appropriate ground protection is to be installed

6.2.1.2 The protected area should be regarded as sacrosanct, and, once installed, barriers and ground protection should not be removed or altered without prior recommendation by the project arboriculturist and, where necessary, approval from the local planning authority.

6.2.1.3 Pre-development tree work may be undertaken before the installation of tree protection measures, with the agreement of the planning authority and neighbouring landowner.

6.2.2 Barriers

6.2.2.1 Barriers should be fit for the purpose of excluding construction activity and appropriate to the degree and proximity of work taking place around the retained trees. Barriers should be maintained to ensure that they remain rigid and complete.

6.2.2.2 The physical protection barrier should comprise a vertical and horizontal scaffold framework, well braced to resist impacts. The vertical tubes should be spaced at a maximum interval of 3 m and driven securely into the ground. Onto this framework, welded mesh panels should be securely fixed. Care should be exercised when locating the vertical poles to avoid underground services and, in the case of the bracing poles, also to avoid contact with structural roots. If the presence of underground services precludes the use of driven poles, an alternative specification should be prepared in conjunction with the project arboriculturist that provides an equal level of protection. Such alternatives could include the attachment of the panels to a free-standing scaffold support framework.

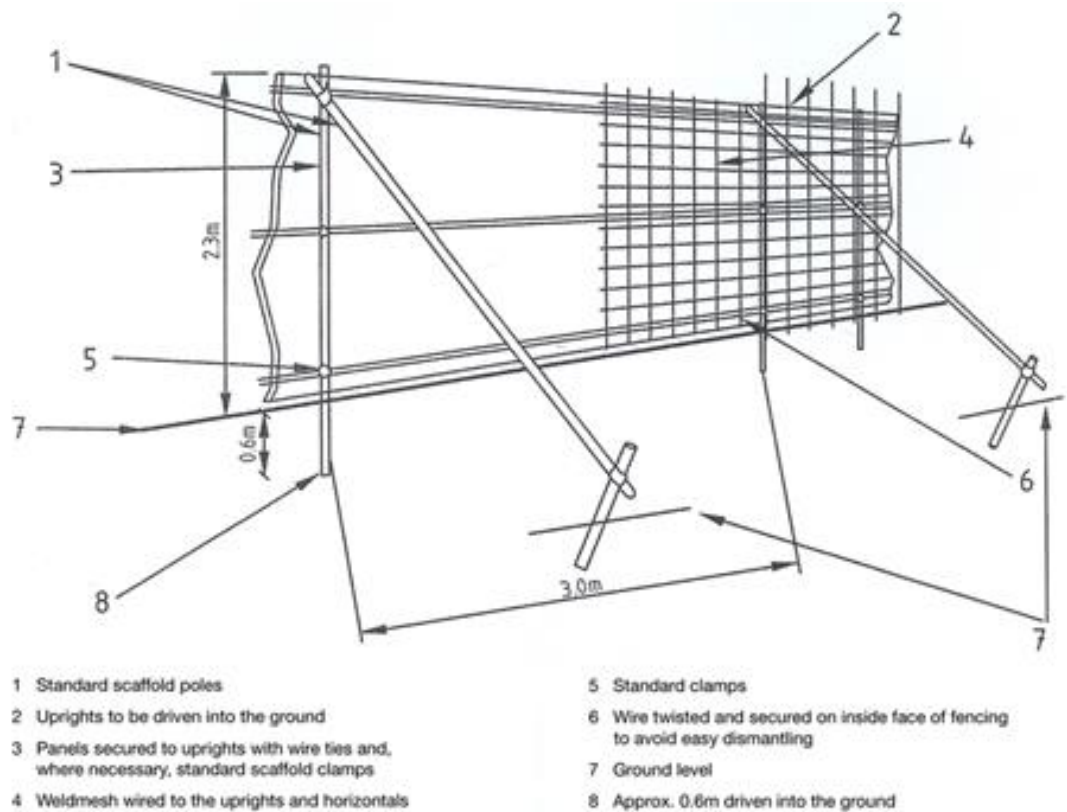


Figure 2. – Protective fencing for RPA

6.2.2.3 All-weather notices should be attached to the barrier with words such as: **“CONSTRUCTION EXCLUSION ZONE – NO ACCESS”**.

6.2.3 Ground protection during demolition and construction

6.2.3.1 Construction activity within the Root Protection Area is limited to approximately 8% of the RPA of T9. Prior to the commencement of this work the following ground protection is to be installed within this area in order to allow pedestrian movement over the Root Protection Area without causing compaction or distortion to underlying soil.

6.2.3.2 Temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

- a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane;
- b) for pedestrian-operated plant up to a gross weight of 2 t, proprietary, inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile membrane;
- c) for wheeled or tracked construction traffic exceeding 2 t gross weight, an alternative system (e.g. proprietary systems or pre-cast reinforced concrete slabs) to an engineering specification designed, if necessary, in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.

6.2.3.3 In all cases, the objective should be to avoid compaction of the soil, which can arise from the single passage of a heavy vehicle, especially in wet conditions, so that tree root functions remain unimpaired.

6.2.4 Additional precautions outside the exclusion zone

6.2.4.1 Planning of site operations should take sufficient account of wide loads, tall loads and plant with booms, jibs and counterweights (including drilling rigs), in order that they can operate without coming into contact with retained trees. Such contact can result in serious damage to the trees and might make their safe retention impossible. Consequently, any transit or traverse of plant in proximity to trees should be conducted under the supervision of a banksman, to ensure that adequate clearance from trees is maintained at all times.

6.2.4.2 Fires on sites should be avoided if possible. Where they are unavoidable, they should not be lit in a position where heat could affect foliage or branches. The potential size of a fire and the wind direction should be taken into account when determining its location, and it should be attended at all times until safe enough to leave.

6.2.4.3 Any materials whose accidental spillage would cause damage to a tree should be stored and handled well away from the outer edge of its RPA.

7.0 Construction and Demolition in proximity to existing trees

7.1 General

7.1.1 Construction within the RPA should accord to the principle that the tree and soil structure take priority. The most reliable way to ensure this is to preserve the RPA completely undisturbed. Soil structure should be preserved at a suitable bulk density for root growth and function (of particular importance for soils of a high fines content), existing rootable soil retained and roots themselves protected.

7.1.2 The ability of a tree to tolerate some disturbance and alteration of its

growing conditions depends on specific circumstances, including prevailing site conditions, and in general, the older the tree, the less successfully it will adapt to new conditions.

7.1.3 Construction activity is required within a proportion of the RPA of T9. The following methods should be followed in this area:

7.2 Avoiding physical damage to the roots Construction

7.2.1 Excavation should be undertaken carefully, using hand-held tools and preferably by compressed air soil displacement.

7.2.2 Roots, whilst exposed, should immediately be wrapped or covered to prevent desiccation and to protect them from rapid temperature changes. Any wrapping should be removed prior to backfilling, which should take place as soon as possible.

7.2.3 Roots smaller than 25 mm diameter may be pruned back, making a clean cut with a suitable sharp tool (e.g. bypass secateurs or handsaw), except where they occur in clumps. Roots occurring in clumps or of 25 mm diameter and over should be severed only following consultation with an arboriculturist, as such roots might be essential to the tree's health and stability.

7.2.4 Prior to backfilling, retained roots should be surrounded with topsoil or uncompacted sharp sand (builders' sand should not be used because of its high salt content, which is toxic to tree roots), or other loose inert granular fill, before soil or other suitable material is replaced. This material should be free of contaminants and other foreign objects potentially injurious to tree roots.

7.2.4 As much as physically possible the finished surface within the R.P.A must be porous in order to allow water and gases to pass freely to and from the roots. Information on suitable hard surfaces is provided in Annex A.1.5

7.3 Avoiding physical damage to the roots Demolition

7.3.1 Physical Protection Barriers are to be installed before any demolition works commence

7.3.2 The demolition should be undertaken inwards within the footprint of the existing building (often referred to as "top down, pull back").

7.3.3 The advice of an arboriculturist should be sought where underground structures present within the RPA are, or will become, redundant. In general it is preferable to leave such structures in situ, as their removal could damage adjacent tree roots.

7.3.4 Where an existing hard surface is scheduled for removal, care should be taken not to disturb tree roots that might be present beneath it. Hand-held

tools or appropriate machinery should be used (under arboricultural supervision) to remove the existing surface, working backwards over the area, so that the machine is not moving over the exposed ground. If a new hard surface is to be laid, it might be preferable to leave any existing sub-base in situ, augmenting it where required.

7.4 Underground and above-ground utility apparatus

7.4.1 Mechanical trenching for the installation of underground apparatus and drainage severs any roots present and can change the local soil hydrology in a way that adversely affects the health of the tree. For this reason, particular care should be taken in the routeing and methods of installation of all underground apparatus. Wherever possible, apparatus should be routed outside RPAs. Where this is not possible, it is preferable to keep apparatus together in common ducts. Inspection chambers should be sited outside the RPA.

7.4.2 Where underground apparatus is to pass within the RPA, detailed plans showing the proposed routeing should be drawn up in conjunction with the project arboriculturist. In such cases, trenchless insertion methods should be used (see Table), with entry and retrieval pits being sited outside the RPA. Provided that roots can be retained and protected in accordance with 7.2.2, excavation using hand-held tools (**see 7.2.1**) might be acceptable for shallow service runs.

NOTE The suitability of these for differing applications is summarized in the following Table.

Trenchless solutions for differing utility apparatus installation requirements

Method	Accuracy mm	Bore dia. A) mm	Max. Sub length B) m	Applications	Not suitable for
Microtunnelling	<20	100 to 300	40	Gravity-fall pipes, deep apparatus, watercourse/ roadway undercrossings	Low-cost projects due to relative expense
Surface-launched directional drilling	≈100	25 to 1 200	150	Pressure pipes, cables including fibre optic	Gravity-fall pipes, e.g. drains and sewers c)
Pipe ramming	≈150	150 to 2 000	70	Any large-bore pipes and ducts	Rocky and other heavily obstructed soils
Impact moling D)	≈50 E)	30 to 180 F)	40	Gas, water and cable connections,	Any application that

				e.g. from street to property	requires accuracy over distances in excess of 5 m
--	--	--	--	------------------------------	---

- A) Dependent on strata encountered.
- B) Maximum subterranean length.
- C) Pit-launched directional drilling can be used for gravity fall pipes up to 20 m subterranean length.
- D) Impact moling (also known as thrust-bore) generally requires soft, cohesive soils.
- E) Substantial inverse relationship between accuracy and distance.
- F) Figures given relate to single pass: up to 300 mm bore achievable with multiple passes.

7.4.3 Above-ground apparatus (including CCTV cameras and lighting) should be sited to avoid the need for detrimental tree pruning. In this regard, the current and future crown size of the tree should be assessed. Tree branches can be pruned back with care to provide space, though it is not appropriate for repetitive and significant tree work to be an initial design solution unless this is a suitable management outcome for the tree. Pruning should be undertaken in accordance with BS 3998:2010.

8 Site works, landscape operations and Management

8.1 General

The general treatment of areas around newly planted and existing trees should allow for adequate infiltration of water and free gas exchange, reduction of water evaporation and the retention of an open soil structure to encourage root growth. Care should be taken to ensure that grass or weed growth does not compete with young root growth by intercepting available water supply. Care should also be taken to avoid the risk of damage to the stems of young trees from future strimming or mowing operations. An area with a radius of at least 500 mm from the stem of newly planted trees should therefore be kept free from competing vegetation by chemical weed control or by the more environmentally friendly option of mulching.

NOTE 1 Soft landscape finishes, including mulch and cultivated beds, will generally provide more favourable conditions for young tree establishment than most hard surfaces or grass. The use of ground-cover shrubs with an appropriate organic mulch is particularly beneficial: this treatment suppresses weeds, reduces maintenance, discourages intrusion and maintains a permeable open soil structure.

NOTE 2 BS 4428:1989 provides recommendations for the treatment of soft surfaces, but excludes hard surfaces.

8.2 Drainage

New development can have an effect on the existing drainage pattern and ground water levels of a site, due to level changes, increased areas of hard surface and new drainage installations. The root systems of mature trees do not generally adapt as well as younger specimens to alterations to groundwater. Expert advice on both drainage and trees should be taken where groundwater conditions are liable to change.

8.3 Topsoil quality and amelioration

8.3.1 The quality of topsoil is a critical factor for the establishment and growth of new planting or seeding, and should be assessed by a competent person for depth, structure, texture and content. If there is any doubt regarding the suitability of soil to be used as a growing medium, appropriate samples should be analysed by a specialist soil laboratory for horticultural/landscape use, with particular reference to nutrients, organic content and any potential toxic materials or other contaminants. The report should include an assessment of suitability and any recommendations for appropriate remedial work, including the need for further specialist site investigation if necessary. Imported topsoil to be used in planting or seeding operations should be from a source approved by a competent person, samples should be submitted for analysis, and deliveries should be certified and verified for their consistency with approved samples.

8.3.2 Topsoil depths should be appropriate for, and may vary according to, the type and size of planting or seeding to be undertaken.

8.4 Soil compaction and remediation measures

Guidelines

Soil that has been compacted will not provide suitable conditions for the survival and growth of vegetation, whether existing or new, and is a common cause of post-construction tree loss on development sites. Compacted soil will adversely affect drainage, gas exchange, nutrient uptake and organic content, and will seriously impede or restrict root growth. The risk of soil compaction is greatest in soils with a significant clay content and in wet conditions. It can result from temporary or short-term loadings, such as the passage of a single vehicle, or from longer-term construction activities, including materials storage.

Soil compaction should be avoided around existing vegetation, including trees, and in areas where new planting or seeding is proposed. Where soil compaction has occurred in the vicinity of existing trees, arboricultural advice should be taken before carrying out any remedial or other works within RPAs to mitigate risk of further damage to roots. Remedial works may include sub-soil aeration using compressed air, and the addition of other materials, preferably of a bulky, organic nature (but excluding peat), to improve structure. Heavy mechanical cultivation such as ploughing or rotavation should not occur within the RPA.

Any cultivation operations should be undertaken carefully by hand in order to minimize damage to the tree, particularly the roots. Decompaction measures include forking, spiking, soil augering and tilled radial trenching. Care should be taken during such operations to minimize the risk of further damage to tree roots.

8.5 Use of mulch

NOTE Further guidance on mulching is given in BS 3998:2010.

8.5.1 Open soil and shrub planting areas around newly planted trees should be mulched to inhibit weed growth, reduce groundwater evaporation, resist and mitigate soil compaction and reduce maintenance requirements, whilst allowing gas exchange and water penetration to roots. The mulch material should be weed-free, easy to apply, containable within the area of application and readily available. The choice of material will be informed by local availability of materials, site characteristics and aesthetic requirements. The mulch should be periodically replenished as it decomposes so that it does not become depleted, and ideally when the soil is warm and moist.

8.5.2 The materials that may be used for mulching include coarsely divided plant matter, such as well-composted wood chip, pulverized bark, leaf mould or green waste conforming to PAS 100, and these may be combined with well-rotted animal manure. If the sole intention is to conserve moisture, a layer of gravel or well-secured sheets of material such as permeable geotextile fabric may be used, and may be covered for cosmetic purposes. Any such sheets should be maintained to avoid damage to the tree (e.g. by clogging, weed growth, restriction of air movement or constriction of the stem).

8.5.3 The mulched area should extend over as much of the root system as can be allowed by other site-usage requirements. The depth of an organic mulch should not be so much as to inhibit aeration of the root system (normally no more than 100 mm). The area around the tree should be well-watered prior to the application of mulching material and the mulch should be periodically replenished as it decomposes, so that it does not become depleted.

NOTE Mulches that retain water encourage the development of roots near the soil surface and in the mulch itself. This can become a disadvantage owing to desiccation if the mulch is removed or not replenished.

8.5.4 Mulches should be kept away from direct contact with the bark of the stem, or of major roots, since this might encourage infection by pathogens by maintaining wet conditions.

*NOTE Although, by improving the soil texture and acting as a buffer for rainfall, mulches generally help to prevent extremes of soil wetness and dryness, they can prolong waterlogging on sites where drainage is seriously impeded. This in turn can harm tree roots and make them more susceptible to certain pathogens such as *Phytophthora* spp.*

8.6 Hard surfaces

NOTE Guidance on types of hard surface materials is given in Annex A.

8.6.1 Where surfaces adjacent to new tree planting locations are paved, the settlement of the soil in tree pits which occurs gradually after planting can cause movement of the paved area, including the partial collapse or instability of paving or disruption of flexible surfaces, where these are laid over prepared pits. Adjacent paving should therefore be retained and supported by a conventional edging and sub-base set at a distance where it is unlikely to be affected by settlement. Where this is not feasible, the outer edges of the backfilled area of the tree pit should be treated as a transition zone, using interlocking surface reinforcement grids backfilled with a flexible surface dressing of a permeable, granular material (e.g. gravels, shingles, other aggregates) which will allow for minor movement and can be topped up if required.

8.6.2 Where load-bearing paving is to be laid over pits, it should:

- a) incorporate a below ground structural system; or
- b) incorporate a purpose-designed tree grille with appropriate support around the edges; or
- c) utilize structural soil from an approved source (i.e. a composite material that is certified as capable of enabling root growth and development while supporting likely surface loadings); or
- d) be laid when the soil has settled and the level made good.

8.6.3 Due allowance should be made for the future growth of stem and roots of a tree when determining the finished dimensions and the design of edge or kerb treatments of tree pits and planted areas. Where necessary, precautions should be taken at the time of planting to limit future surface distortion near trunks, e.g. by the use of technical solutions such as root deflectors.

8.6.4 Where there is a risk of damage to the tree arising from intrusion within the tree planting station area (e.g. by vehicles in car parks), an above-ground barrier, such as bollards or fencing, should be incorporated into the design to provide appropriate physical protection.

8.6.5 Where there is risk of a tree pit receiving surface water run-off that might be contaminated by de-icing salt, either species that are known to be sensitive to salt damage should be avoided, or impermeable paving should be designed and laid to fall away from the pit.

NOTE Contamination by fuel spillages, or other materials that might be toxic or harmful to trees, can be mitigated by the incorporation of hydrocarbon capture systems in the drainage system design.

8.7 Use of herbicides

The use of herbicides in the vicinity of existing trees should be appropriate for

the type of vegetation to be killed, and all instructions, warnings and other relevant information from manufacturers should be strictly observed and followed. Care should be taken to avoid any damaging effects upon existing plants and trees to be retained, species to be introduced, and existing sensitive habitats, particularly those associated with aquatic or drainage features.

NOTE Attention is drawn to the Control of Pesticides Regulations 1986, as amended [11], the Control of Substances Hazardous to Health Regulations 1994, as amended [12], and HSE publication INDG 257 [13]. Guidance is also available from the Pesticides Safety Directorate (www.pesticides.gov.uk) [viewed 2012-03-26].

8.8 Tree management

8.8.1 Pre-development tree work – Schedule of Works

The majority of the trees assessed do not lie within the ownership of this property. We do, however suggest that, where applicable, permissions be sought from the adjoining landowner in order to carry the following pre-development tree work:

T2 (Willow)	Pollard at 6 metres
T4 (Silver Birch)	Remove Tree
T7 (Scots Pine)	Remove lowest limb and deadwood.
T9 (Wellingtonia)	Reduce by at least 5 metres height
T11 (Scots Pine)	Remove tree
T14 & T15 (Holly)	Reduce to 4 metres height.
T16 (Cedar)	Remove tree.
T17 to T21 (Holly)	Reduce to 4 metres

In addition, deadwood should be removed from affected trees and Ivy should be severed at the base in order to aid future inspection and reduce wind resistance.

8.8.2 Working within the root protection area (RPA)

8.8.2.1 Care should be taken to ensure during tree removal or remedial work that damage to the retained trees and/or disturbance to the RPA is avoided. Precautions should include dismantling techniques to reduce the risk of accidental damage, and ground protection measures where excessive pedestrian movements or use of plant and machinery might lead to compaction.

8.8.2.2 If temporary access is required for plant or vehicles within the RPA, this should be provided by means of temporary ground protection. *NOTE In all cases,*

the objective is to avoid compaction of the soil, which can arise from the single passage of a heavy vehicle, especially in wet conditions, so that tree root functions remain undamaged.

8.8.2.3 If stumps are to be removed, it should be carried out using a stump grinder. Stumps should not be dug / pulled out as this may well cause damage to adjacent trees

8.8.3 Post-development management: existing trees

8.8.3.1 It must be considered that any retained tree may be adversely affected as a result of development if recommended procedures are not correctly followed. Decline may occur over a period of several years before eventual tree death. It is, therefore, recommended that trees be assessed for signs of distress in the years following development.

8.8.3.2 All trees over the site should be routinely checked for the presence of deadwood within the crown. This is especially important as activity within the target area beneath the crown increases

8.8.3.3 Whenever any tree surgery works are carried out consents must be obtained from the local Planning Authority and work should be carried out by professional tree surgeons in accordance with BS3998.

8.8.3.4 All trees should be routinely monitored for signs of deadwood, stress and decay.

8.8.4 Post-development management: new plantings - Guidelines

8.8.4.1 Regular maintenance of newly planted trees is of particular importance for at least three years during the critical post-planting period and might, where required by site conditions, planning requirements or legal agreement, be for 5 years or more. A detailed maintenance schedule covering this period should be prepared in conjunction with the landscape design proposals, and appropriate arrangements made for its implementation.

NOTE Maintenance operations would normally include weed control and watering as necessary, inspection and adjustment of support systems and monitoring of growth. Formative pruning might also be required to achieve desired effects or to provide for access or clearance.

8.8.4.2 Defects that become apparent during the maintenance period should be addressed by appropriate remedial works (including replacement planting where necessary) as advised by a competent person.

Annex A (informative)

General advice for other interested parties

NOTE This annex contains general advice that is expected to be of use to land managers, contractors, planners, statutory undertakers, surveyors, and all others interested in harmony between trees and construction.

A.1 Avoiding damage by trees to structures

A.1.1 General

Buildings need to be designed and constructed to accommodate the current and potential future influence of existing and removed vegetation, as well as planned new planting.

In some situations, trees and vegetation can adversely affect structures either by direct action (**see A.1.2**) or by indirect action (**see A.1.4**).

A.1.2 Direct damage by trees to structures

Trees can cause direct damage to structures by:

- a) the disruption of underground utility apparatus;
- b) displacement, lifting or distorting;
- c) the impact of branches with the superstructure;
- d) structural failure of the tree.

The potential for direct damage needs to be considered throughout the design and construction process.

The growth of the base of the stem or of roots near the surface exerts relatively small forces. Whilst paving slabs or low boundary walls can be lifted or pushed aside easily, heavier or stronger structures are more likely to withstand these forces without damage, as the root distorts around the obstruction before damage occurs. The greatest risk of direct damage occurs close to the tree from the incremental growth of the main stem and the roots, and diminishes rapidly with distance.

It is advisable that new tree planting is kept at distances from structures of at least those in Table A.1.

Where construction work is to take place near to existing trees, allowance for future tree growth needs to be factored in to the construction process in order to protect the structure. For example:

1) walls or structural slabs need to bridge over roots allowing sufficient clearance for future growth;

2) paving and other surfaces need to be laid on a flexible base to allow movement and to facilitate relaying if distortion becomes excessive.

Water leaking from damaged drains and sewers encourages localized root growth; roots are then likely to enter a drain or sewer through the defect and proliferate, causing blockage and an enlarging of the initial defect. Provided they are further from trees than the distances stipulated in Table A.1, intact drains are not likely to suffer direct damage and will not attract roots. Damage to drains and sewers can be avoided by:

- i) re-routeing to conform to Table A.1;
- ii) ensuring watertight joints;
- iii) in clay soils, use of flexible materials and/or joints to accommodate movement;
- iv) not using perforated land drains near trees.

Allowance needs to be made for the swaying of stem and branches during storm conditions. Branches which are liable to strike the structure need to be removed or pruned back to a suitable branching point as appropriate (see BS 3998:2010).

Table A.1 Minimum distance between young trees or new planting and structure to avoid direct damage to a structure from future tree growth

Type of structure	Minimum distance between young trees or new planting and structure, in metres (m)		
	Stem dia. <300 mm A)	Stem dia. 300 mm to 600 mm A)	Stem dia. >600 mm A)
Buildings and heavily loaded structures	—	0.5	1.2
Lightly loaded structures such as garages, porches etc.	—	0.7	1.5
Services			
<1 m deep	0.5	1.5	3.0
>1 m deep	—	1.0	2.0
Masonry boundary walls	—	1.0	2.0
In-situ concrete paths and drives	0.5	1.0	2.5

Paths and drives with flexible surfaces or paving slabs	0.7	1.5	3.0
--	-----	-----	-----

A) Diameter of stem at 1.5 m above ground level at maturity

A.1.3 Allowance for future growth

Where the installation of paths or light structures such as walls is unavoidable near to trees, the design and construction specification needs to take account of future growth.

If it is necessary to build a wall or similar structure over a root greater than 50 mm diameter, provision for future diameter growth needs to be made by surrounding the root with uncompacted sharp sand, void-formers, or other flexible fill materials, and by laying an adequately reinforced lintel or raft over the surface.

A.1.4 Indirect damage by trees to structures

Damage by indirect action can occur in shrinkable soils such as clay when vegetation takes moisture from the ground, causing a significant volume change resulting in ground movement. Non-cohesive soils such as sand and gravel are not shrinkable, as their volume does not alter with a change in moisture content, and so structures on these soils are unaffected by indirect damage.

Buildings and drainage need to be protected against the effects of subsidence and heave.

- Subsidence takes place when water is withdrawn from the soil causing it to shrink.
- Heave takes place when previously dehydrated soil takes up water and swells. This can happen after the felling or removal of vegetation. It can also occur beneath a building if roots are severed. These activities make heave more prevalent in new build construction than older buildings. Heave is three-dimensional, exerting both vertical and lateral pressures on structures.

Detailed guidance is given in NHBC Standards Chapter 4.2 [14].

A.1.5 Types of hard surface materials and their suitability in proximity to Trees

NOTE Materials in common use include those described in A.1.5.1 to A.1.5.4. Other materials are available.

A.1.5.1 Washed gravel

Washed gravel retains its porosity unless excessively consolidated, and is

particularly useful where changes of level occur or an irregular shape is needed around the stem of a tree. Gravel is easily renewed or topped up. Although weeds might become established, they can be controlled by chemical or mechanical means. However, gravel is rarely suitable for use where there is vehicle or pedestrian traffic, e.g. in residential areas. Materials with a high fines content, such as self-binding gravels or hoggin, ought not to be used due to their almost impermeable texture when consolidated.

A.1.5.2 Paving slabs and block pavers

Paving slabs and block pavers are available with built-in infiltration spaces between the slabs or blocks. These are ideal, but need to be laid dry-jointed on a sharp sand or coarse aggregate no-fines foundation to allow air and moisture to penetrate to the rooting area.

A.1.5.3 In-situ concrete

As in-situ concrete forms an impermeable surface, falls and openings need to be provided for water and air to enter the soil (the necessary liner can be penetrated through the falls or openings once the concrete has set). This can be achieved by forming 50 mm diameter holes in the construction of a slab at regular spacings of 300 mm to 600 mm (as determined by an engineer) and backfilling the resulting holes with no-fines gravel or aggregate. A high standard of materials and workmanship is needed if frost damage and excessive wear are to be avoided.

A.1.5.4 Bitumen paving and resin-bonded gravels

These surfaces can consist of porous or impermeable material. As the interstices in unsealed tar paving will eventually become blocked by fines, it is advisable for such surfaces to be laid following the same principles as those for impermeable surfaces, therefore its use within the RPA also needs to be restricted to the 20% RPA recommendation (7.4.2.3).

A.2 Avoiding damage to trees

A.2.1 General

Trees that have good health and stability are well adapted to their surroundings. Any development activity which affects the adaptation of trees to a site could be detrimental to their health, future growth and safety. Tree species differ in their ability to tolerate change, but all tend to become less tolerant after they have reached maturity or suffered previous damage or physiological stress. Planning and subsequent site management aims need to minimize the effect of change.

The part of a tree most susceptible to damage is the root system, which, because it is not immediately visible, is frequently ignored. Damage to, or death of, the root system affects the health, growth, life expectancy and safety of the entire tree. The effects of such damage might only become evident several years later.

Damage can be the result of a number of minor but compounding factors that

accumulate over time. Materials such as uncured concrete, diesel oil and vehicle washings can all damage roots and lead to adverse impacts on the tree.

Damage to the stem and branches of a tree is not usually sufficient to kill the tree directly, but can make it unsafe by affecting the dynamics and growth of the tree, or by initiating long-term decay. Such damage can also be disfiguring. The attachment of notice boards, cables and other utility apparatus can all damage trees, as can using trees as anchors for winching.

A.2.2 Extent and form of the root system

Within a short distance of the stem, the roots are highly branched, so as to form a network of small-diameter woody roots, which can extend radially for a distance much greater than the height of the tree, except where impeded by unfavourable conditions. All parts of this system bear a mass of fine, non-woody absorptive roots, typically concentrated within the uppermost 600 mm of the soil.

The root system does not generally show the symmetry seen in the branch system. The development of all roots is influenced by the availability of water, nutrients, oxygen and soil penetrability. As far as these conditions allow, the root system tends to develop sufficient volume and area to provide physical stability.

The uptake of water and mineral nutrients by the root system takes place via the fine non-woody roots (typically less than 0.5 mm diameter) and associated beneficial fungi (mycorrhizae). Their survival and functioning, which are essential for the health of the tree as a whole, depend on the maintenance of favourable soil conditions. The fine roots are short-lived, with the majority dying each winter and new ones developing in response to the needs of the tree.

All parts of the root system, but especially the fine roots, are vulnerable to damage. Once roots are damaged, water and nutrient uptake is restricted until new ones have grown. Mature trees recover slowly, if at all, from damage to their woody roots.

Annex B (informative)

Trees and the planning system

Under the UK planning system, local authorities have a statutory duty to consider the protection and planting of trees when granting planning permission for proposed development. The potential effect of development on trees, whether statutorily protected (e.g. by a tree preservation order or by their inclusion within a conservation area) or not, is a material consideration that is taken into account in dealing with planning applications. Where trees are statutorily protected, it is important to contact the local planning authority and follow the appropriate procedures before undertaking any works that might affect the protected trees.

The nature and level of detail of information required to enable a local planning authority to properly consider the implications and effects of development proposals varies between stages and in relation to what is proposed. Table B.1 provides advice to both developers and local authorities on an appropriate amount of information. The term “minimum detail” is intended to reflect information that local authorities are expected to seek, whilst the term “additional information” identifies further details that might reasonably be sought, especially where any construction is proposed within the RPA.

Table B.1 Delivery of tree-related information into the planning system

Stage of process	Minimum detail	Additional information
Pre-application	Tree survey	Tree retention/removal plan (draft)
Planning application	Tree survey (in the absence of pre-application discussions) Tree retention/removal plan (finalized) Retained trees and RPAs shown on proposed layout Strategic hard and soft landscape design, including species and location of new tree planting Arboricultural impact assessment	Existing and proposed finished Levels Tree protection plan Arboricultural method statement – heads of terms Details for all special engineering within the RPA and other relevant construction details
Reserved matters/ planning conditions	Alignment of utility apparatus (including drainage), where outside the RPA or where installed using a trenchless method Dimensioned tree protection plan Arboricultural method statement – Detailed Schedule of works to retained trees, e.g. access facilitation pruning Detailed hard and soft landscape design	Arboricultural site monitoring Schedule Tree and landscape management Plan Post-construction remedial works Landscape maintenance schedule

Annex C

Cascade chart for tree quality assessment

TREES FOR REMOVAL				
Category & Definition	Criteria			Identification on Plan
Category U Those in such a condition that any existing value would be lost within 10 years and which should, in the current context, be removed for reasons of sound arboricultural management.	Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other Category R Trees. Trees that are dead or showing signs of significant, immediate and irreversible overall decline. Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality.			DARK RED
TREES TO BE CONSIDERED FOR RETENTION				
Category and Definition	1. Mainly arboricultural values	2. Mainly Landscape Values	3. Mainly cultural values, including conservation	Identification on Plan
Category A Those of high quality & value: in such a condition as to be able to make a substantial contribution (a minimum of 40 years)	Trees that are particularly good examples of their species, especially if rare or unusual, or essential components of groups, or of formal or semi-formal arboricultural features (eg dominant/principal trees within an avenue)	Trees, groups or woodlands which provide a definite screening or softening effect to the locality in relation to views into or out of the site, or those of particular visual importance (eg. Avenues or other arboricultural features assessed as a group)	Trees, groups or woodlands of significant conservation, historical, commemorative or other value.	LIGHT GREEN
Category B Those of moderate quality & value: those in such a condition as to make a significant contribution (a minimum of 20 years)	Trees that might be included in the high category, but are downgraded due to impaired condition	Trees present in numbers, usually as groups or woodlands, such that they form distinct landscape features, thereby attracting a higher collective rating than they might as individuals but which are not, individually, essential components of formal or semi formal arboricultural features.	Trees with clearly identifiable conservation or other cultural benefits.	MID BLUE
Category C Those of low quality and value: currently in adequate condition to remain until new planting could be established (a minimum of 10 years) or young trees with a stem diameter below 150mm	Trees not qualifying in higher categories.	Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value and/or trees offering low or only temporary screening benefit.	Trees with very limited conservation or other cultural benefits	GREY
NOTE: Whilst C Category trees will not usually be retained where they would impose a significant constraint on the development, young trees with a stem diameter of less than 150mm should be considered for relocation.				