

Hedgerow Planting

Access Track

1.22m RH
Ward Bdy

Def

Proposed New Hedgerow Planting

1.22m RH

Earthworks

Def

© 2020 RPS Group
Notes
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.
3. Where applicable Ordnance Survey (© Crown Copyright 2020) All rights reserved. Licence number 0100031873


Key

- Individual tree to be retained
- Individual tree requiring removal to facilitate the development
- Tree group to be retained
- Tree group to be removed
- Scrub/Hedge/Shrubs/Saplings to be retained
- Scrub/Hedge/Shrubs/Saplings to be removed
- Root protection area (RPA) calculated in accordance with Section 4.6 - BS5837:2012
- Construction Exclusion Zone - Protective fencing (e.g. Heras style). To be assembled in accordance with Section 6.2 - BS5837:2012 (see inset for example barriers)
- Security fencing. This will provide tree protection for majority of site but must be installed prior to construction works.
- Hard surfaces to be constructed above existing ground level using 'No-Dig' construction methods (see Arboricultural Practice Note 12)

BS 5837:2012 Tree Quality Categories - Table 1

- Category A - High quality
- Category B - Moderate quality
- Category C - Low quality
- Category U - Unsuitable for retention

- NOTES:
- Refer to RPS Tree Schedule for further details.
 - Survey based on a visual inspection from the ground and is not intended as a full arboricultural inspection.
 - Plan produced in accordance with recommendations set out in BS 5837:2012 - "Trees in Relation to design, demolition and construction".
 - Due to the legal protection afforded to breeding birds, vegetation removal should not take place during the bird nesting period, generally, although not restricted to, March - August inclusive.
 - Survey plotted using sub metre GPS survey device onto Topographical Survey provided by the client.

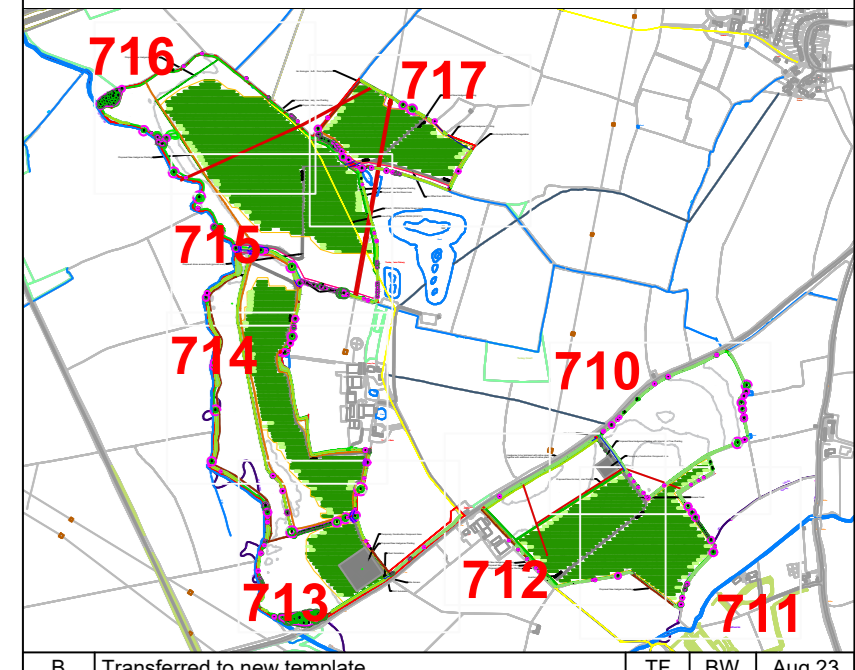

Tree Protection Specification

All vegetation identified for removal should be removed prior to the start of works. The Tree Protection Plan provides details of vegetation removal and retention.

An assessment of crown impacts should be carried out by the Consultant Arboriculturist or the Client's Landscape Manager prior to implementing tree protection, so that any potential requirements for access pruning have been assessed.

Any access pruning should be carried out prior to the installation of the Tree Protection Fencing and carried out to the standards set out in BS3998:2010 Tree Works - Recommendations.

Tree Protection Fencing should be to the specification below:

Figure 1 - Examples of appropriate stabilising systems

Tree Protection should be form of frayed Heras fencing panels secured with willow dials and with supports fixed into the ground to prevent movement once installed. Manufacturer's recommendations should be provided to ensure correct installation.

All personnel should be made aware of the protected areas and instructed to keep them free of materials, waste and excess soil. Soil disturbances should be prohibited and levels of any work, including foot traffic, should also be restricted within the root protection area (RPA) unless previously agreed and adequate ground protection has been installed. Where foot traffic is agreed within the RPA, single thickness scaffold boards laid over a compressible material on a geotextile or supported by suitable ground surface. Where vehicular access through the RPA is agreed an engineer should be consulted to design adequate ground protection methods.

0m 10 20 30 40 50m
SCALE 1:500

rps
A TETRA TECH COMPANY

Lakesbury House, Hittingbury Road, Chandlers Ford, Hampshire SO53 5SS
T: 02380 810 440 E: rps@rpsgroup.com

Client **SCOTTISHPOWER**

Project **Land at Tuckey Farm, Winslow**

Title **Tree Protection Plan**

Status	Drawn By	PM/Checked by
For planning	TF	BW

Job Ref	Scale @ AD	Date Created
JSL3012	1:500	Aug 23

RPS Drawing / Figure Number	Rev
711	B

rpsgroup.com