



Plate 3: NNE facing close up of doorway to No.103 Henderson Street (Site 32)



Plate 4: Hazard Sign within the curtilage of No.103 Henderson Street (Site 32)



Plate 5: Structural damage to the WSW gable of No.105 Henderson Street (Site 90)



Plate 6: Structural damage to the ESE gable of No.105 Henderson Street (Site 90)



Plate 7: North facing view of of No.105 Henderson Street (Site 90) from the street front



Plate 8: NNE facing view of No.103 Henderson Street (Site 32)



Plate 9: ESE facing view of No.103 Henderson Street (Site 32)

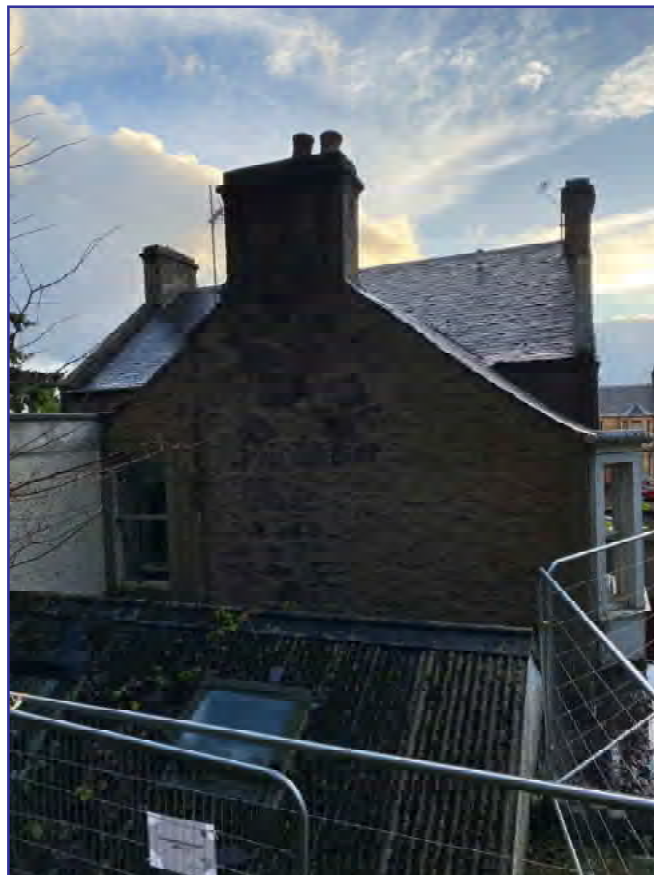


Plate 10: South facing view of No.103 Henderson Street (Site 32)



Plate 11: Southwest facing view of No.103 Henderson Street (Site 32)



Plate 12: View of interior fittings and panelling within No.103 Henderson Street (Site 32)



Plate 13: No.103 Henderson Street (Site 32), detail of boot scraper by the front entrance



Plate 14: East facing view of Category C Listed Woodland House and Darnley House (Sites 30-31) with No.103 Henderson Street (Site 32) visible to the rear.



Plate 15: Southeast facing view of Category B Listed Kelvingrove (Site 45)



Plate 16: South facing view of Category B Listed Florence Villa (Site 44)

# **103 & 105 Henderson Street, Bridge of Allan: Heritage Assessment**

## **Appendix 1: Site Gazetteer**



---

<b>Site Number</b>	1
<b>Site Name</b>	Tanglin, 3 Well Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22705
<b>HER Number</b>	NS79NE 28
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279367
<b>Northing</b>	697611
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Circa 1850. 2-storey stugged ashlar villa. 2 canted bays and simple plain architraved doorpiece with cornice; slated roof, projecting eaves at gables.</p> <p>Statement of Special Interest Originally Springbank House</p>

---

<b>Site Number</b>	2
<b>Site Name</b>	5, 7, 9 Well Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22706
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279385
<b>Northing</b>	697622
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. 2-storey and basement detached villa coursed rubble with raised margins and rock-faced basement. Square-column anta porch with railed flyover stairs and single first floor window above between canted bays with moulded arrises. Slated roof. Original glazing. Unfortunate recent 2-storey extension on S Gable.</p> <p>Statement of Special Interest Formerly Rose Villa</p> <p>Bibliography Shown in 1864 map</p>

---

<b>Site Number</b>	3
<b>Site Name</b>	4, 6, 8 Well Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22707

---

---

**HER Number**

**Status** Listed Building Category B

**Easting** 279425

**Northing** 697613

**Parish** Bridge of Allan

**Council** Stirling

**Description** Circa 1840/50, late Georgian survival, 2-storey and basement villa, ashlar-faced with 1st floor band course, raised margins and rock-faced basement. S front has Ionic columned doorpiece with railed fly-over stair and 1 first floor window between end canted bays; 3-window W front, slightly off-centre Ionic pilastered doorpiece, railed steps; twin wall-head chimneys, piended, slated roof. Original lying-pane glazing except at lower sashes of upper flat.

Statement of Special Interest  
Formerly Eden House

---

**Site Number** 4

**Site Name** 10, 12 Well Road

**Type of Site** House

**List Entry No./ NRHE No.** LB22708

**HER Number**

**Status** Listed Building Category C

**Easting** 279453

**Northing** 697625

**Parish** Bridge of Allan

**Council** Stirling

**Description** Early Victorian, 2-storey and attic detached Jacobean villa, coursed rubble with raised margins and 1st floor cill course; main block symmetrical 3-window front with 2-gabled and ball-finished masonry dormers. Gabled, slated roof. Slightly lower 2-storey, 1-window wing addition at E gable. Original glazing. Single-storey and dormerless attic former coach house. 1-window gable and wall with gatepiers to Well Road. Rubble-built, slated roof.

Statement of Special Interest  
Formerly Aboukir Villa.

---

**Site Number** 5

**Site Name** Zetland House, 1 Chalton Road

**Type of Site** House

**List Entry No./ NRHE No.** LB22596

**HER Number**

**Status** Listed Building Category B

**Easting** 279517

**Northing** 697639

**Parish** Bridge of Allan

---

---

<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. 2-storey detached villa with slight asymmetry of treatment, coursed rubble with raised quoins and raised margins with chamfer; end canted bays, that on left higher than that on right, raised in piend; shouldered and moulded centre doorpiece with key-block, consoled cornice with low decorative iron balcony over, centre 1st window shouldered and keyblocked, 2-window gable to Mine Road. Slated roof. Original glazing. Simple distinctive treatment.

---

<b>Site Number</b>	6
<b>Site Name</b>	5 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22597
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279541
<b>Northing</b>	697619
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian with later additions Centre block 2-storey coursed rubble villa, 1-window between end canted bays centre pilastered doorpiece. Original glazing. Later lower 2-storey wings, 1-window with 1st floor oriel to right, and 2-storey 2-window (1 oriel) to left. Gabled, slated roofs.

---

<b>Site Number</b>	7
<b>Site Name</b>	3 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22597
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279538
<b>Northing</b>	697627
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian with later additions Centre block 2-storey coursed rubble villa, 1-window between end canted bays centre pilastered doorpiece. Original glazing. Later lower 2-storey wings, 1-window with 1st floor oriel to right, and 2-storey 2-window (1 oriel) to left. Gabled, slated roofs.

---

<b>Site Number</b>	8
<b>Site Name</b>	7 Chalton Road
<b>Type of Site</b>	House

---

---

List Entry No./ NRHE No. LB22597

HER Number

Status Listed Building Category C

Easting 279552

Northing 697617

Parish Bridge of Allan

Council Stirling

Description Early Victorian with later additions Centre block 2-storey coursed rubble villa, 1-window between end canted bays centre pilastered doorpiece. Original glazing. Later lower 2-storey wings, 1-window with 1st floor oriel to right, and 2-storey 2-window (1 oriel) to left. Gabled, slated roofs.

---

Site Number 9

Site Name 11 Chalton Road

Type of Site House

List Entry No./ NRHE No. LB22598

HER Number

Status Listed Building Category C

Easting 279589

Northing 697612

Parish Bridge of Allan

Council Stirling

Description Mid Victorian. 2-storey symmetrical rubble-built semi-detached villa. Slightly advanced gabled ends with canted bays through both floors, decorative bargeboard - gabled bipartite at centre over twin doorpieces with hoodmoulds stepped over panels, chamfered openings, straight skews with ball finials. Large chimney breasts and 2-window with dormer heads on flanks, single-storey back wings.

---

Site Number 10

Site Name 9 Chalton Road

Type of Site House

List Entry No./ NRHE No. LB22598

HER Number

Status Listed Building Category C

Easting 279579

Northing 697610

Parish Bridge of Allan

Council Stirling

Description Mid Victorian. 2-storey symmetrical rubble-built semi-detached villa. Slightly advanced gabled ends with canted bays through both floors, decorative bargeboard - gabled bipartite at centre over twin doorpieces with hoodmoulds stepped over panels, chamfered openings, straight

---

skews with ball finials. Large chimney breasts and 2-window with dormer heads on flanks, single-storey back wings.

---

<b>Site Number</b>	11
<b>Site Name</b>	Rowanhurst, 15 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22599
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279617
<b>Northing</b>	697591
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Dated 1863. Asymmetrical detached villa, 2-storey snecked rubble L-plan front, advanced gable to left with canted bay through both floors, gabled front face; right hand section 2-window, moulded and consoled doorpiece at inner bay chamfered and shouldered openings, straight skews with finials. Slated roof.

---

<b>Site Number</b>	12
<b>Site Name</b>	17 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22600
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279651
<b>Northing</b>	697574
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian 2-storey symmetrical rubble built semi detached. Similar to Nos 9, 11.  Statement of Special Interest Of value for continuity of group only. Pleasant but without special features.

---

<b>Site Number</b>	13
<b>Site Name</b>	19 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22600
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C

---

---

<b>Easting</b>	279658
<b>Northing</b>	697568
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian 2-storey symmetrical rubble built semi detached. Similar to Nos 9, 11.  Statement of Special Interest Of value for continuity of group only. Pleasant but without special features.

---

<b>Site Number</b>	14
<b>Site Name</b>	Thornton Lodge, 21 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22601
<b>HER Number</b>	
<b>Status</b>	Listed Building category C
<b>Easting</b>	279695
<b>Northing</b>	697543
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. Large 2-storey rubble-built detached villa. 3-window stepped L-plan front left-hand bay gabled with canted bay, cavetto corbelled to square and gabled, through both floors; right hand bay has ground floor canted bay with platformed fish-scale roof, single dormer-head window above, centre gabled bay has gable-hooded porch, 1-window above. W front, 2-window ground floor canted bay to left ground floor rectangular tripartite French window bay to right, with platformed fish-scale roof and decorative iron cresting. Single-storey wings at rear and E fronts. Slated roofs with broad eaves.

---

<b>Site Number</b>	15
<b>Site Name</b>	23 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22602
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279729
<b>Northing</b>	697517
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. Plain 2-storey and dormerless attic, rubble-built detached villa semi-symmetrical treatment. Gabled end bays with canted bay through both floors to left, shallow rectangular bipartite bay to right, 1-window over consoled and keyblocked doorpiece, centre bay; simple moulded arrises at main openings, small attic windows in gables. Slated roof with bracketted eaves.

---

---

<b>Site Number</b>	16
<b>Site Name</b>	25 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22603
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279758
<b>Northing</b>	697492
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Mid Victorian. Plain 2-storey rubble-built detached villa, L-plan front: advanced left-hand gabled section with canted bay through both floors, simply moulded openings. Bracketted eaves, slated roof.</p> <p>Statement of Special Interest Of value for continuity of group only. Pleasant but without special features.</p>

---

<b>Site Number</b>	17
<b>Site Name</b>	2 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22611
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279493
<b>Northing</b>	697598
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Mid Victorian. 2-storey attic and basement, symmetrical villa, coursed rubble with raised quoins; twin-gabled 3-window front, (2 tripartites centre 1st round arched and keyblocked,) centre round-arched columned and elaborately consoled doorpiece with balustraded balcony over; railed steps; chamfered slightly shouldered openings, decorative bargeboarding, 2 small shouldered windows in gables at attic level, centre dormer. Twin gabled S front with 2 canted bays of two storeys, small venetians above at attic level, similar treatment. Slated roof, platformed between chimneys. Single-storey E wing clumsily raised to 2-storey later.</p>

---

<b>Site Number</b>	18
<b>Site Name</b>	10, 12 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22612

---

---

## HER Number

<b>Status</b>	Listed Building Category C
<b>Easting</b>	279564
<b>Northing</b>	697554
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. Plain symmetrical 2-storey and attic coursed rubble detached villa; pilastered doorpiece and architraved 1st floor window between end canted bays; main cornice and blocking course, single timber-faced centre dormer. Gabled, slated roof.

---

<b>Site Number</b>	19
<b>Site Name</b>	Hazelwood, 14 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22613

## HER Number

<b>Status</b>	Listed Building Category C
<b>Easting</b>	279611
<b>Northing</b>	697545
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. 2-storey snecked rubble detached villa; pilastered doorpiece with single 1st floor window above between tripartite windows of very shallow projection; moulded eaves course, piended and platformed slated roof. Single-storey 1-window wing to left, also piended.

---

<b>Site Number</b>	20
<b>Site Name</b>	16 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22614

## HER Number

<b>Status</b>	Listed Building Category C
<b>Easting</b>	279651
<b>Northing</b>	697509
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian with later additions, simple stop-chamfered gothic 2-storey stepped L-plan detached villa. Snecked rubble with straight skews and ball finials. Ground floor bays on W and W fronts inserted 1906 (dated at rainwater head) when extensive E wing was added, 2-storey harled with NE octagon, big conical roof with broad metal-stayed eaves, leaded glass, some windows with curved heads: style of William Leiper.

---

---



---

<b>Site Number</b>	21
<b>Site Name</b>	18 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22615
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279693
<b>Northing</b>	697470
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. 2-storey asymmetrical late classic detached villa, snecked rubble with raised quoins. L-plan front, advanced section to left has ground floor rectangular tripartite bay, 1 bipartite at 1st; remainder 2-window consoled window to right, centre doric columned porch with circled parapet, sheltering round-arched doorpiece in re-entrant angle. Plain entablature, main cornice, slated piended roof. Conservatory on E gable with elongated square-dome roof.

---

<b>Site Number</b>	22
<b>Site Name</b>	20, 22 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22616
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279714
<b>Northing</b>	697455
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. Symmetrical detached rubble-built. 2-storey and basement villa snecked rubble, simple distinctive treatment double-gabled 3-window front with slightly advanced tripartites, centre pilastered and splayed doorpiece, railed steps; 2 small round arched windows in gables at attic level.  Rear elevation also double-gabled with canted bays through both floors. 2-windows centre between with semi-elliptically arched windows.

---

<b>Site Number</b>	23
<b>Site Name</b>	Seaforth, 24, 26 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22617
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B

---

---

<b>Easting</b>	279747
<b>Northing</b>	697434
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. Symmetrical detached 2-storey rubble-built villa. Similar to Nos 20, 22.

---

<b>Site Number</b>	24
<b>Site Name</b>	28 Chalton Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22618
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279785
<b>Northing</b>	697422
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. Symmetrical detached 2-storey rubble-built villa. Similar to Nos 20, 22.

---

<b>Site Number</b>	25
<b>Site Name</b>	The Fountain of Nineveh, Fountain Road
<b>Type of Site</b>	Fountain
<b>List Entry No./ NRHE No.</b>	LB22624
<b>HER Number</b>	NS79NE 42
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279102
<b>Northing</b>	697199
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid 19th century. Circular cast-iron basin on moulded ashlar base, cast-iron fluted Roman Doric column bearing upper basin surmounted by capitalled pedestal of dolphins with shell uppermost basin and bird finial above.

---

<b>Site Number</b>	26
<b>Site Name</b>	Chalmers Church, Henderson Street
<b>Type of Site</b>	Church
<b>List Entry No./ NRHE No.</b>	LB22626
<b>HER Number</b>	

---

---

<b>Status</b>	Listed Building Category B
<b>Easting</b>	279345
<b>Northing</b>	697485
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>J W &amp; J H Hay, Liverpool, 1856. Mid-pointed, cruciform, orientated N. rubble-built, with S broach spire, 108' high; low broad 3-bay nave with steep roof, lower transepts, apse; interesting treatment of tower and spire, massive diagonal buttresses containing broad flight of steps to door of 2 orders, 3-light curvilinear window 2nd stage, triple lancets stepped in the broaches of the spire 3rd stage, 2-light lucarnes at spire, 2 tiers of smaller gablets above. S bays of nave have tall 2-light curvilinear windows raised in gablets, N 2 bays depressed-arch 2-lights. Slated roofs. Fine setting well back from street with avenue approach.</p> <p>Statement of Special Interest Former Free Church Ecclesiastical building in use as such.</p> <p>References Building Chronicle vol II p 138 Courtesy of Buildings of Scotland Research Unit.</p>

---

<b>Site Number</b>	27
<b>Site Name</b>	79, 81 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22627
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279363
<b>Northing</b>	697421
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. Plain symmetrical semi-detached villa. 2-storey and attic, stugged ashlar with raised margins; 2 windows and cast-iron columned double-porch between canted bays (door now window at No 81) canted dormers over the canted bays with delicate cast-iron balcony over the bay at No 81. Gabled slated roof. Original glazing.</p> <p>Statement of Special Interest Formerly Fountain Terrace.</p>

---

<b>Site Number</b>	28
<b>Site Name</b>	83 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22627
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279368

---

---

<b>Northing</b>	697419
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. Plain symmetrical semi-detached villa. 2-storey and attic, stugged ashlar with raised margins; 2 windows and cast-iron columned double-porch between canted bays (door now window at No 81) canted dormers over the canted bays with delicate cast-iron balcony over the bay at No 81. Gabled slated roof. Original glazing.
	Statement of Special Interest Formerly Fountain Terrace.

---

<b>Site Number</b>	29
<b>Site Name</b>	87 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22628
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279401
<b>Northing</b>	697406
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. Symmetrical detached villa. 2-storey and attic, rubble-built, 1-window between end canted bays, centre moulded architraved corniced doorpiece, moulded eaves cornice, 2-straight-fronted canted dormers with bowed roofs; main roof gabled and slated. Reglazed.
	Statement of Special Interest Formerly Woodland House

---

<b>Site Number</b>	30
<b>Site Name</b>	95, 97 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22629
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279443
<b>Northing</b>	697381
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian 2-storey and attic, coursed rubble with lighter ashlar dressings and main cornice, 2-bay front to Henderson Street, canted bay through both floors at pediment-gabled left hand section; symmetrical 3-window W front, centre pilastered doorpiece, railed steps: shaped chimney gable with central attic window. Slated roof, straight-sided canted dormer with bowed roof to Henderson Street. Original glazing ground floor, upper windows reglazed.

---

---

<b>Site Number</b>	31
<b>Site Name</b>	99, 101 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22630
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279452
<b>Northing</b>	697376
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. Symmetrical 2-storey and attic coursed rubble with lighter free-stone dressings, 1-window between end canted bays, centre Doric columned porch: main cornice, with blocking course over the canted bays, 2 straight-fronted canted dormers with bowed roofs. Gabled, slated roof. Reglazed, except at dormers.</p> <p>Statement of Special Interest Originally freestanding. Nos 95, 97 were added at W gable early on. Formerly Mineral Bank.</p>

---

<b>Site Number</b>	32
<b>Site Name</b>	Eagleton Hotel, 103 Henderson Street
<b>Type of Site</b>	Hotel
<b>List Entry No./ NRHE No.</b>	LB22631
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279490
<b>Northing</b>	697383
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. Symmetrical 2-storey and attic rubble-built, centre door with Regency-style porch, wrought-iron balcony and 1st floor bipartite over between canted bays; 2 straight fronted dormers with bowed roofs. Gabled, slated roof. Partly reglazed. Unfortunate recent single-storey addition to right.</p> <p>Statement of Special Interest Formerly Oakbank</p>

---

<b>Site Number</b>	33
<b>Site Name</b>	107, 109 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22632

---

---

**HER Number**

**Status** Listed Building Category B

**Easting** 279568

**Northing** 697352

**Parish** Bridge of Allan

**Council** Stirling

**Description** Early Victorian. Asymmetrical detached villa. 2-storey and attic rubble-built with lighter freestone dressings, 3-window front, gabled section to left has canted bay through both floors, wrought iron balcony over: centre pilastered doorpiece, railed steps: dormer heads at centre and right-hand bays, ball finials to gable and gablets. Flanking single-storey 1-window wings, gabletted windows. Slated roofs, that of main house gabled, those of wings piended. Original glazing. Painted ashlar gatepiers.

Statement of Special Interest  
Now divided. Formerly Allnagowa

References  
Shown in 1864 map

---

**Site Number** 34

**Site Name** Mansefield, 111 Henderson Street

**Type of Site** House; former manse

**List Entry No./ NRHE No.** LB22633

**HER Number**

**Status** Listed Building Category B

**Easting** 279591

**Northing** 697346

**Parish** Bridge of Allan

**Council** Stirling

**Description** Mid 19th century. Georgian survival. Plan 2-storey, 3-window detached villa, rubble-built with raised margins, centre pilastered doorpiece with rectangular fanlight ground floor windows plain architraved with pedimental cornices. Platformed, slated roof. Single-storey wing on E gable. Original glazing.

Statement of Special Interest  
Divided into flats. Formerly FC Manse.

References  
Shown in 1864 map.

---

**Site Number** 35

**Site Name** 113, 117, 119 Henderson Street

**Type of Site** House

**List Entry No./ NRHE No.** LB22634

---

---

**HER Number****Status** Listed Building Category B**Easting** 279620**Northing** 697331**Parish** Bridge of Allan**Council** Stirling**Description** Early Victorian. Unusual 3 house scheme producing large mansion-like mass. 2-storey symmetrical, coursed rubble, centre house slightly advanced, Roman Doric columned porch with arched doorpiece and 1st floor arched and keyblocked window between canted bays, outer set-back bays have single triparties and splayed angles, 5-window flanks with arched and pilastered doorpieces in 2nd bay. Piended, slated, platformed roof. Original glazing.**Statement of Special Interest**

Became Stanley House School in 1870 and later became Stanley Hospital. Now divided into flats.

**References**Shown in 1864 map.

---

**Site Number** 36**Site Name** Coneypark, 121 Henderson Street**Type of Site** House**List Entry No./ NRHE No.** LB22635**HER Number****Status** Listed Building Category B**Easting** 279670**Northing** 697306**Parish** Bridge of Allan**Council** Stirling**Description** Early Victorian. Plain Jacobean mansion house of William Burn school, 2-storey main block with lower 2-storey wing, single-storey office and coach-house range forming L-plan entrance forecourt.

Coursed rubble, asymmetrical S front with 1-window gabled W bay and 2 dormer heads, windows over ground floor tripartite on E, 3-window (1 blind) E front, slightly advanced gabled entrance bay, architraved and stepped hood-moulded doorpiece, bay on left gabled, bay on right with dormer head, lower 2-storey wing to N has altered ground floor fenestration.

Single-storey former stable wing at right angles, 2-window with gabled coach house end bay now used as garage. Slated roofs. Glazing largely original.

**References**Shown in 1864 map.

---

**Site Number** 37**Site Name** Suilven, 125 Henderson Street

---

---

Type of Site	House
List Entry No./ NRHE No.	LB22636
HER Number	
Status	Listed Building Category B
Easting	279711
Northing	697278
Parish	Bridge of Allan
Council	Stirling
Description	<p>Early Victorian. 2-storey detached villa coursed rubble with lighter freestone dressings, raised quoins; 3-window S front centre Roman Doric pilastered tripartite doorpiece, between canted bays ground floor; central bipartite between 2 V-fronted bipartites of Mackison type 1st floor with gablets of decorative barge-boarding eaves. Single-storey piended wing on E gable, with single-storey and attic (former stables) forming L-plan. Slated roof.</p> <p>Statement of Special Interest Formerly Manchester House.</p> <p>References Shown in 1864 map.</p>

---

Site Number	38
Site Name	127 Henderson Street
Type of Site	House
List Entry No./ NRHE No.	LB22637
HER Number	
Status	Listed Building Category C
Easting	279741
Northing	697261
Parish	Bridge of Allan
Council	Stirling
Description	<p>Mid Victorian. 2-storey symmetrical coursed rubble detached villa; centre shouldered, key-blocked consoled and corniced doorpiece with 1st floor bipartite between canted bays which have segment-headed centre lights ground floor and roofs swept up into spirelets; slated, main roof piended.</p>

---

Site Number	39
Site Name	92, 94, 96 Henderson Street
Type of Site	House
List Entry No./ NRHE No.	LB22645
HER Number	
Status	Listed Building Category C
Easting	279296

---



---

<b>Northing</b>	697395
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. 2-storey detached villa. Rubble-built, 1-window between canted bays, centre consoled and corniced doorpiece with pedimental blocking course. Moulded eaves cornice, chamfered arrises at canted bays. Piended, slated roof. Reglazed.
	Statement of Special Interest Of value for continuity of group only.

---

<b>Site Number</b>	40
<b>Site Name</b>	100 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22646
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279322
<b>Northing</b>	697384
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian 2-storey detached villa. Rubble-built, 1-window between canted bays centre consoled and block pedimented doorpiece; arrises of canted bays chamfered, slightly shouldered at 1st. Slated roof. Original glazing.
	Statement of Special Interest Formerly Belvue House

---

<b>Site Number</b>	41
<b>Site Name</b>	102, 104 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22647
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279356
<b>Northing</b>	697362
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. 2-storey lined stucco detached villa, 1-window between canted bays, centre pilastered doorpiece with cavetto splay, (now window); moulded arrises at canted bays, main cornice and blocking course, gabled slated roof. Reglazed.
	Statement of Special Interest Formerly Allanton.

---

---

<b>Site Number</b>	42
<b>Site Name</b>	2 Melville Place
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22648
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279389
<b>Northing</b>	697352
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. 2-storey coursed rubble detached villa. 1-window between canted bays, centre consoled and corniced doorpiece with wrought-iron balcony over. Main cornice, blocking course, piended, slated roof. Flanking single-storey 1-window wing to right with main cornice and blocking course. Piended, slated roof.

---

<b>Site Number</b>	43
<b>Site Name</b>	Bruntsfield, 106 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22648
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279383
<b>Northing</b>	697356
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Mid Victorian. 2-storey coursed rubble detached villa. 1-window between canted bays, centre consoled and corniced doorpiece with wrought-iron balcony over. Main cornice, blocking course, piended, slated roof. Flanking single-storey 1-window wing to right with main cornice and blocking course. Piended, slated roof.

---

<b>Site Number</b>	44
<b>Site Name</b>	108 Henderson Street
<b>Type of Site</b>	Office
<b>List Entry No./ NRHE No.</b>	LB22649
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279451

---

---

<b>Northing</b>	697321
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. Plain symmetrical detached villa; 2-storey coursed rubble, 1-window between canted bays, centre pilastered doorpiece with cavetto splay and pedimental blocking course. Gabled, slated roof. Original glazing.</p> <p>Garden area replaced with concrete paving.</p> <p>Statement of Special Interest Now offices. Formerly Florence Villa.</p>

---

<b>Site Number</b>	45
<b>Site Name</b>	Kelvingrove, 110, 112, 114 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22650
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279480
<b>Northing</b>	697302
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. Late classic. Symmetrical detached villa. 2-storey and attic coursed rubble with freestone dressings, centre pilastered doorpiece with cavetto splay and wreathed frieze and single window above between canted bays with panelled spandrels; main cornice, blocking course, 2 straight fronted canted dormers with semi-elliptically bowed roofs; gables harled. Slated roof. Original glazing. Later additions at rear with V-fronted bays.</p> <p>Statement of Special Interest Former private school for girls.</p> <p>Bibliography Shown in 1864 map Erskine's Guide to Bridge of Allan (1901) p25.</p>

---

<b>Site Number</b>	46
<b>Site Name</b>	Hunters Lodge Hotel, 116 Henderson Street
<b>Type of Site</b>	Hotel
<b>List Entry No./ NRHE No.</b>	LB22651
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279508
<b>Northing</b>	697287
<b>Parish</b>	Bridge of Allan

---

---

<b>Council</b>	Stirling
<b>Description</b>	Circa 1865. 2-storey and attic asymmetrical villa coursed rubble with freestone dressings, advanced gabled section to left has canted bay through both floors, 1 round arched window over, at attic level; canted bay through both floors to right, round-arched gabled dormer over; smaller round-arched, dormer at centre. Unfortunate treatment of porch and glazing at ground floor bay. Built out at rear. Slated roof.

---

<b>Site Number</b>	47
<b>Site Name</b>	118, 120 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22652
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279522
<b>Northing</b>	697285
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	J Collie (Glasgow) circa 1851. 2-storey coursed rubble villa, front of main block twin gabled: 1-window between 2 canted bays, consoled doorpiece with cast-iron balcony over, bipartites at attic level, decoratively bargeboarded gables with finials. Adjoining set-back single-storey and basement gabled wings, that on right with later canted bay, and elegant slim-columned porch. Slated roof.  Statement of Special Interest Formerly Belmoir House.

---

<b>Site Number</b>	48
<b>Site Name</b>	122, 124 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22652
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279542
<b>Northing</b>	697280
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	J Collie (Glasgow) circa 1851. 2-storey coursed rubble villa, front of main block twin gabled: 1-window between 2 canted bays, consoled doorpiece with cast-iron balcony over, bipartites at attic level, decoratively bargeboarded gables with finials. Adjoining set-back single-storey and basement gabled wings, that on right with later canted bay, and elegant slim-columned porch. Slated roof.

---

---

---

<b>Site Number</b>	49
<b>Site Name</b>	130, 132 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22653
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279569
<b>Northing</b>	697263
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. 2-storey symmetrical semi-detached villa, coursed rubble with raised margins and quoins, each 2-window (1 bipartite) 1 canted bay; boldly moulded round arched doorpiece, window above arched and keyblocked, reversed plans. Slated, hipped roof. Flanking single-storey 1-window wings with built-up screen walls. Original glazing.</p> <p>Statement of Special Interest Nos 126, 128 formerly Blair Villa 130, 132 formerly Louis Villa.</p>

---

<b>Site Number</b>	50
<b>Site Name</b>	126, 128 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22653
<b>HER Number</b>	
<b>Status</b>	Listed Building Category B
<b>Easting</b>	279554
<b>Northing</b>	697276
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	<p>Early Victorian. 2-storey symmetrical semi-detached villa, coursed rubble with raised margins and quoins, each 2-window (1 bipartite) 1 canted bay; boldly moulded round arched doorpiece, window above arched and keyblocked, reversed plans. Slated, hipped roof. Flanking single-storey 1-window wings with built-up screen walls. Original glazing.</p> <p>Statement of Special Interest Nos 126, 128 formerly Blair Villa 130, 132 formerly Louis Villa.</p>

---

<b>Site Number</b>	51
<b>Site Name</b>	134, 136 Henderson Street
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22654
<b>HER Number</b>	
<b>Status</b>	Listed Building Category C

---

---

<b>Easting</b>	279605
<b>Northing</b>	697249
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Early Victorian. 2-storey basement and attic detached villa, coursed rubble with freestone dressings 1-bipartite between end canted bays, centre pilastered doorpiece, railed steps, 1 timber faced dormer between 2 straight-fronted canted dormers with bowed roofs. Gabled slated roof. Front reglazed except at dormers.
	Statement of Special Interest Formerly Prospect Villa.

---

<b>Site Number</b>	52
<b>Site Name</b>	Kilmore, 1 Kenilworth Road & 2 Well Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22660
<b>HER Number</b>	NS79NE 30
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279406
<b>Northing</b>	697579
<b>Parish</b>	Listed Building Category C
<b>Council</b>	
<b>Description</b>	Later Victorian 2-storey villa, stugged coursers, 3-bay front canted bay through both floors to left, bracketted doorpiece with single-light window over and tripartite, moulded arrises at bay and tripartite to right; lower 1-window wing, originally single-storey raised later, piended slated roofs.

---

<b>Site Number</b>	53
<b>Site Name</b>	Bath House, 3 Kenilworth Road
<b>Type of Site</b>	House
<b>List Entry No./ NRHE No.</b>	LB22661
<b>HER Number</b>	NS79NE 31
<b>Status</b>	Listed Building Category C
<b>Easting</b>	279451
<b>Northing</b>	697553
<b>Parish</b>	Bridge of Allan
<b>Council</b>	Stirling
<b>Description</b>	Circa 1830/40 and later. 2-storey, 2 canted bays and boldly projecting piended timber-columned porch, window above has hooded dormer head continuous with broad eaves; lined stucco front, harled gables. Slated roofs. 2-storey 1-window back wing; reglazed.

---

---