


Daikin Altherma 3 Low Capacity Monobloc (4-6-8 class)



The monobloc standard



E(B/D)LA04-08EV3


E(B-D)LA04-08EV3



Onecta app

NEW

Now available with
voice control

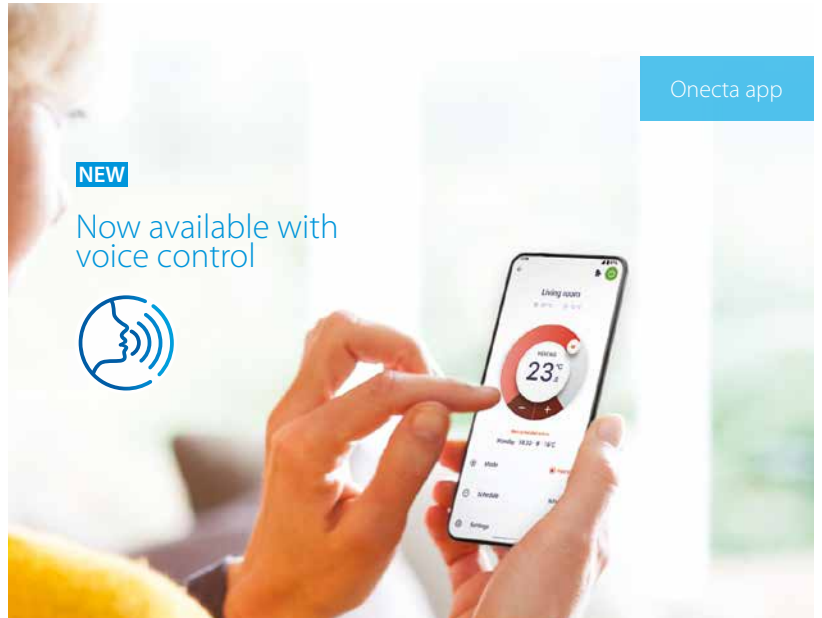

E(B-D)LA04-08EV3

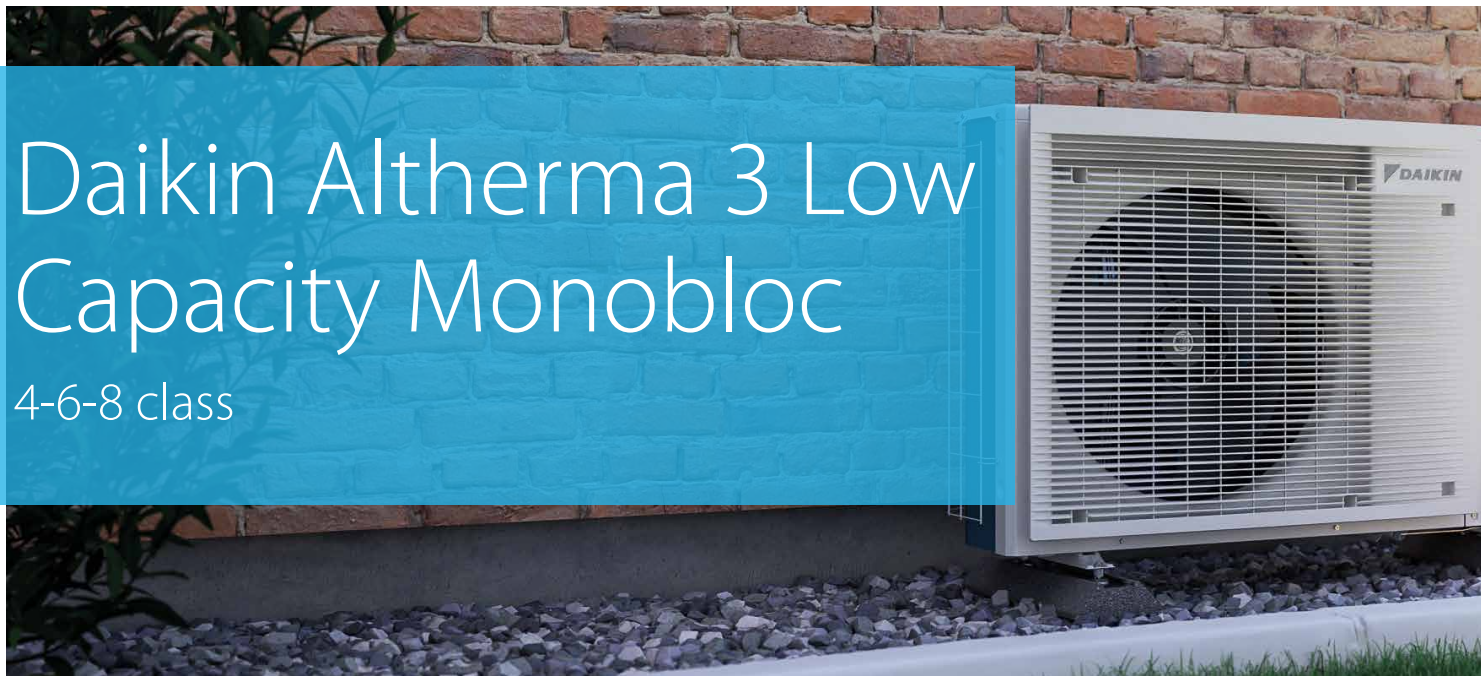


Table of contents

Daikin Altherma 3 Low Capacity Monobloc	4
Functional design.....	4
Fully connected control	6
Consistent compactness	8
Combination table and options.....	9
EDLA04-08EV3 specifications	10
EBLA04-08EV3 specifications	11
Thermal stores and tanks	12
UK.PPC/R32.....	12
EKHWSU-D & EKHWP-PB	13
Controls	16
Daikin Onecta app	16
Madoka for Heating, wired room thermostat	17
Modern user interface	17
Stand By Me	19

Daikin Altherma 3 Low Capacity Monobloc

4-6-8 class



Functional design

Daikin Altherma 3 Low Capacity Monobloc is the Daikin's first third generation monobloc, benefiting from a new design and using the R32 refrigerant, also now available in 4, 6 and 8 class.

A redesigned casing

The white front grille made of horizontal lines is hiding the fan from view, reducing the perception of the sound produced by the unit.



The light grey and seamless casing is slightly reflecting the environment where the unit is installed, helping it to blend in in any decor.

A renewed fan shape

The shape of the fan has been reviewed to reduce the contact surface with air and improve the air circulation.


Help installers and commissioning

- › The rotary switchbox is a brand-new feature in this monobloc heat pump.
- › It helps installers accessing the hydraulic and refrigerant components of the unit in an easy way.
- › The service and commissioning can be then performed with ease.

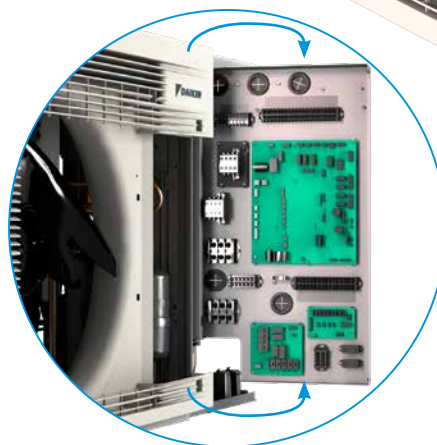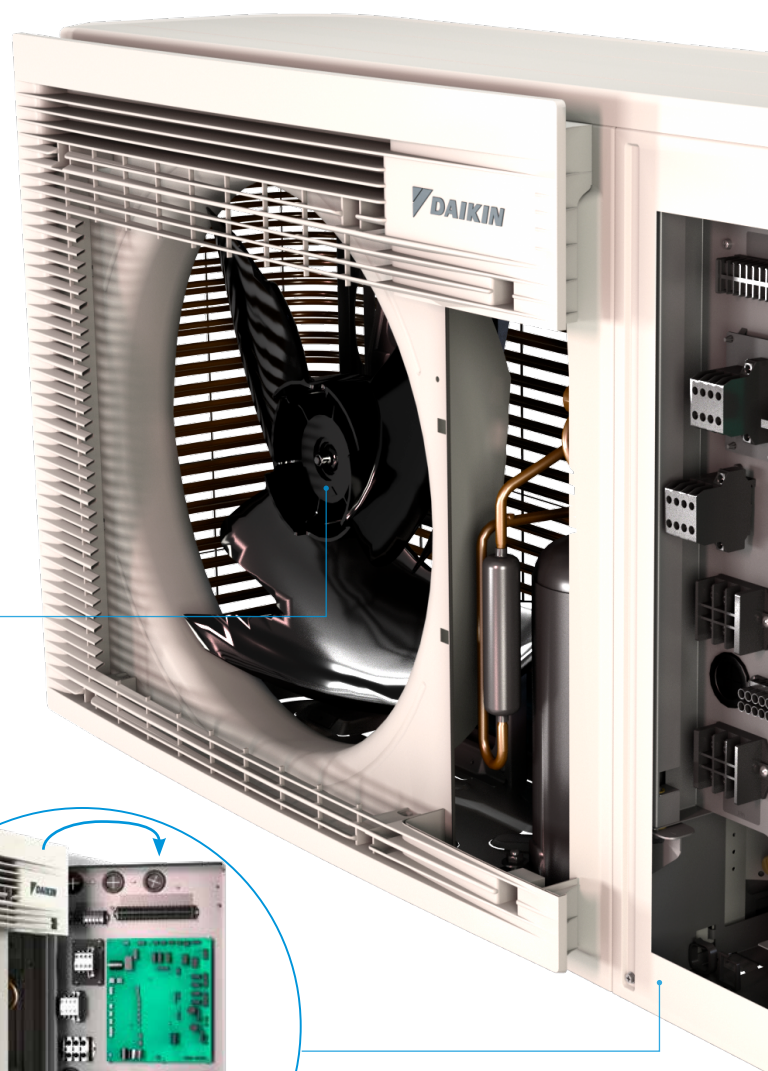



Reduced environmental impact: 70% less CO₂ equivalent
 › GWP: R-410A: 2,088 > R32: 675

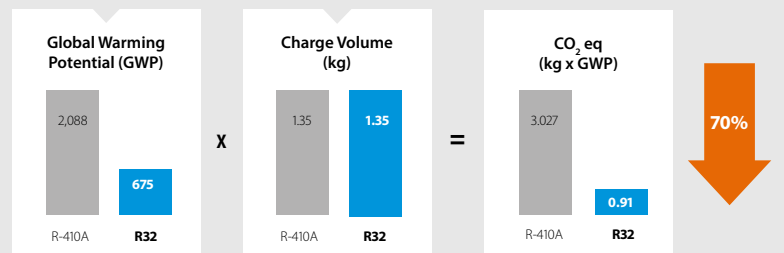

R32 monobloc

R-32 BLUEVOLUTION

Daikin is a pioneer in launching heat pumps equipped with R32. With a lower Global Warming Potential (GWP), the R32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO₂ emissions.

Easy to recover and reuse, R32 is the perfect solution for attaining the new CO₂ emission targets.

A simple solution to space limitation

Thanks to the monobloc set-up, no indoor unit is required which helps when space is limited inside. The monobloc can even fit under a window.

The monobloc also gets its power from inside: all hydraulic components are integrated in one unit, including the sealed refrigerant circuit: no need for refrigerant handling or F-gas qualifications.

Fully connected control

The Daikin Altherma 3 Low Capacity Monobloc is equipped with the most intuitive control solutions.



Heating and cooling emitters

Daikin Altherma 3 Low Capacity Monobloc works perfectly with various emitters, including fan coils, underfloor heating and heat pump convectors.



Cloud ready with
WLAN

Onecta app, with voice control

- › Control the heating system from home or remote via smartphone
- › Control the heating system with the voice
- › Include integrations with Google Assistant and Amazon Alexa
- › Featuring other functions: scheduling and holiday mode, control multiple units and boosting mode, monitoring energy consumption...



reddot award 2018
winner



Madoka: a user-friendly wired room thermostat

- › Sleek and elegant design
- › Intuitive touch button control
- › Three colours to match any interior (white, black and silver-grey)
- › Compact unit measuring only 85 x 85 mm

Domestic hot water production

The monobloc combines with stainless steel tanks (EKHWS-D), Daikin R32 Pre Plumbed Cylinder (UK.PPC/R32), thermal stores and panels (EKHWP) to provide domestic hot water quickly.



✓ **Man Machine Interface (MMI) or User Interface** **NEW**

Inspired by the award-winning design of the Daikin Altherma 3 indoor units, Daikin also upgraded this controller to deliver an even more user-friendly interface.

Quick configuration

After logging in, you'll be able to configure the unit with the new controller in less than 10 steps. You can even check if the unit is ready to use by running test cycles.

Easy operation

The new interface features a few buttons and 2 navigational knobs to help you quickly set the room temperature and control units.

User-friendly design

The interface features an intuitive design. The high contrasted colour screen delivers stunning and practical visuals for both installers and service engineers.

WLAN cartridge connection

Small dimensions for a discreet unit:



136 x 160 x 37 mm (HxWxD)

Consistent compactness

Daikin Altherma 3 Low Capacity Monobloc is the most compact heat pump solution, as it only consists of one outdoor unit only. This is therefore ideal for limited space.

✓ Strengthened performances

The Daikin Altherma 3 Low Capacity Monobloc shows improved performances as well as a wide product range

- › Space heating up to  
- › Domestic hot water up to
- › Operating down to -25°C
- › Delivers LWT 55°C at -15°C without back-up heater
- › Suitable for small new buildings, or system

✓ Extended product range

- › Heating only models (EDLA*)
- › Reversible models providing cooling (EBLA*)
- › One-phase models only
- › Back-up heater less models (EB/DLA-EV3)
- › Available in 4, 6 and 8 class
- › Completing the existing range of 9, 11, 14 and 16 class

✓ Flexibility in domestic hot water production

- › Combination with stainless steel domestic hot water tank (EKHWS(U)-D)
- › Combination with thermal store EKHWP-(P)B to provide domestic hot water with support from the sun
- › Combination with Daikin R32 Pre Plumbed Cylinder range UK.PPC/R32

✓ Perfect match with any heat emitters

- › Combination with underfloor heating applications
- › Combination with heat pump convectors Daikin Altherma HPC

✓ Fits under a window



Combination table and options

			R32 small monobloc	
			Without back-up heater	
			Rev	H/O
			EBLA04EV3	EDLA04EV3
			EBLA06EV3	EDLA06EV3
EBLA08EV3	EDLA08EV3			
Type	Description	Material name		
Controls	Madoka wired room thermostat	BRC1HHDK/S/W	•	•
	Wireless room thermostat	EKRTRB	•	•
	Wired gital thermostat	EKRTWA	•	•
	LAN Adapter + PV Solar	BRP069A61	•	•
	LAN Adapter	BRP069A62	•	•
	Universal centralized controller for cascade	EKCC8-W DCOM-LT/IO,-LT/MB	•	•
	WLAN cartridge	BRP069A78	•	•
Multi-zoning controls	Digital wired room thermostat	EKWCTRDIV3	•	•
	Analog wired room thermostat	EKWCTRANIV3	•	•
	Actuator	EKWCVATRIV3	•	•
	Multi-zoning base station (10 channels)	EKWUFHTAIV3	•	•
Sensors	EKWCVATRIV3	KRCS01-1	• (1)	• (1)
	Multi-zoning base station (10 channels)	EKRSCA1	• (1)	• (1)
	EKWUFHTAIV3	EKRTEFSB	• (2)	• (2)
	Temperature sensor for EKHS-D (25m length)	EKTESE1	•	•
	Temperature sensor for EKHP-(P)B (25m length)	EKTESE2	•	•
Domestic hot water	DHW tank	EKHS(U)-D(3)V3	•	•
	Thermal stores	EKHP500(P)B	•	•
	Third party tank kit	EKHY3PART	• (3)	• (3)
	Third party tank kit	EKHY3PART2	• (4)	• (4)
Heat pump convector	Floor standing	FWXV15/20/25*	• (5)	• (5)
	Wall mounted	FWXT15/20/25*	• (5)	• (5)
	Concealed	FWXM15/20/25*	• (5)	• (5)
Other options	Back-up heater kit	EKLBUHCB6W	• (6)	•
	By-pass kit	EKMBHBP	• (6)	
	Bizone kit	EKMIKPOA	•	•
		EKMIKPHA	•	•
	Digital I/O PCB	EKRPIHBAA	• (7)	• (7)
	Demand PCB	EKRPIAHTA	•	•
	Freeze protection valve	AFVALVE1	•	•
	PC USB cable	EKPCCAB4	•	•
	Smart grid relay kit (high voltage)	EKRELSG	•	•
	Flow switch	EKEFLSW2	• (8)	• (8)

(1) Only 1 sensor can be connected: indoor OR outdoor sensor.

(2) Can only be used in combination with the wireless room thermostat EKRTR(1).

(3) EKHY3PART can be used if you have a tank in which you can insert a thermistor.

(4) EKHY3PART2 can be used if you have a tank in which you can't insert a thermistor.

(5) Multi combination (quantity, depends on capacity class). EKVKHPC needs to be installed mandatory on heat pump convector (exception: LT- H/O).

(6) Check 'EKMBHBP necessity drawing' to decide to install it in combination with reversible models, in order to avoid sweat on the back-up heater.

(7) Additional relays to allow bivalent control in combination with external room thermostat are field supply.

(8) Mandatory if glycol is used.

Daikin Altherma 3 M

Air-to-water monobloc system that provides **heating only (EDLA)** and **Reversible (EBLA)** air-to-water monobloc system that provides **heating and cooling**, both are ideal for indoor spaces that have limited room

- › WLAN cartridge connection standard included
- › Possible to combine with domestic hot water tanks
- › Heating only air-to-water heat pump
- › Monobloc all-in-one concept including all hydraulic parts
- › Optional plug & play integrated 3 kW electric back-up heater
- › Available in one phase



Outdoor Unit			Single Phase			Single Phase		
			EDLA04EV3	EDLA06EV3	EDLA08EV3	EBLA04EV3	EBLA06EV3	EBLA08EV3
Description			Class 4	Class 6	Class 8	Class 4	Class 6	Class 8
Function			Heating Only	Heating Only	Heating Only	Reversible	Reversible	Reversible
Dimensions ^[1]	Height x Width x Depth	mm	770 x 1250 x 362	770 x 1250 x 362	770 x 1250 x 362	770 x 1250 x 362	770 x 1250 x 362	770 x 1250 x 362
Weight	Unit	kg	88	88	88	88	88	88
Nominal capacity	Heating (1/2)	kW	4.30/4.60	6.00/5.90	7.50/7.80	-	-	-
	Cooling (1/2)	kW	-	-	-	4.86/4.52	5.83/5.09	6.18/5.44
Nominal input	Heating/Cooling (1/2)	kW	4.30/4.60	6.00/5.90	7.50/7.80	-	-	-
COP	Heating (1/2)		5.10/3.65	4.85/3.50	4.60/3.50	-	-	-
EER	Cooling 91/2)		5.10/3.65	4.85/3.50	4.60/3.50	5.91/3.32	5.40/3.28	5.19/3.14
Seasonal space heating efficiency	Space heating (Average climate) 35°C	Class	A+++	A+++	A+++	A+++	A+++	A+++
		Efficiency	176	176	179	176	176	179
	Space heating (Average climate) 55°C	SCOP	4.48	4.47	4.56	4.48	4.47	4.56
		Class	A++	A++	A++	A++	A++	A++
		Efficiency	127	127	130	127	127	130
		SCOP	3.26	3.26	3.32	3.26	3.26	3.32
Operation range	Heating	°C	-25 ~ 35	-25 ~ 35	-25 ~ 35	-	-	-
	Cooling	°C	-	-	-	10 ~ 43	10 ~ 43	10 ~ 43
	Hot water	°C	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35
Sound power level	Heating	dBA	58	60	62	61	62	62
Sound pressure level 4	Heating/Cooling	dBA	44	47	49	48	49	50
Refrigerant charge (factory)	R32	kg	1.35	1.35	1.35	1.35	1.35	1.35
Power supply			1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz
Recommended fuses	Outdoor unit	A	20	20	25	20	20	25
Pump	No. of speeds		Inverter controller	Inverter controller	Inverter controller	Inverter controller	Inverter controller	Inverter controller
Expansion vessel volume	litres		7	7	7	7	7	7
Water connections (diameter)	inch		1" (male)	1" (male)	1" (male)	1" (male)	1" (male)	1" (male)
Minimum water volume	litres		20	20	20	20	20	20
Minimum flow rate	Cooling	l/min	-	-	-	10	10	10
	Heating (Incl. defrost)	l/min	12	12	12	12	12	12
	Hot water	l/min	25	25	25	25	25	25
Maximum piping distance to tank	m		10	10	10	10	10	10
Maximum level difference	m		5	5	5	5	5	5
SAP ID								

Nominal capacity and nominal input tested according to EN 14511 at the following conditions:

Heating 1: Ambient air temperature 7°C and leaving water temperature 35°C (A7 W35) Heating 2: Ambient air temperature 7°C and leaving water temperature 45°C (A7 W45)

Cooling 1: Ambient air temperature 35°C and leaving water temperature 18°C (A35 W18) Cooling 2: Ambient air temperature 35°C and leaving water temperature 7°C (A35 W7)

[3] Includes aesthetic grill

[4] Sound pressure level measured at 1m from the unit

Back-up heater kit (optional):

			EKLBHHC6W1
Description			Back up heater kit (3kW)
Nominal rating			3
Dimensions	Depth	mm	210
	Width	mm	250
	Height	mm	560
Power supply		kg	1-phase / 230V / 50Hz
Recommended fuse	3 kW 1ph 230V	Amps	13
Water connections	Diameter	Inch	1" (male)

Accessories:

Accessory Ref	Description
BRC1HHDW	Madoka Heating - White
BRC1HHDS	Madoka Heating - Silver
BRC1HHDK	Madoka Heating - Black
BRP069A78	Daikin ONECTA App – Wi-fi module [SD Card]
EKRELSG	Smart grid relay kit (high voltage)
EKPCAB4	PC cable – to upload field settings from PC to unit
AFVALVE1	Anti-freeze valve for glycol free systems (two required per heat pump)
EKFLSW2	Optional flow switch (See note)
EKRSC1	Optional remote temperature sensor for outdoor unit (See note)
KRCS01-1	Optional remote temperature sensor for indoor unit (See note)
EKRP1HBA	Optional PCB kit for remote alarm monitoring, fault indication, solar interlock and bivalent operation
EKRP1AHT	Optional PCB kit for demand control, power consumption control and power limitation
K.FF600ASN	Two flexi feet, height 100mm, to mount the outdoor unit
K.CWBXL	Wall brackets for outdoor units (250kg, 660mm long, 2 arms)
K.CWBXLS	Wall brackets for outdoor units (250kg, 660mm long, 2 arms) - Stainless Steel
UK.DTS	Condensate drip tray (1400 x 400 x 50mm)
UK.DTFB3	Floor bracket kit to mount drip tray for 3 flexi feet or wall bracket
K.HOSE750	Pair of flexible hoses
K.HOSE750EL	Pair of flexible hoses with elbow
K.FERNOXTF1	Fernox magnetic filter 1"
K.FERNOXTF1FL	Fernox magnetic filter 1" and F1 inhibitor fluid (500ml)
EKEPRHLT5H	Thermal store (500l) connection kit – For heating only models (for R32 H HT, H-Split, Ref Split and Monobloc)
EKEPRHLT5X	Thermal store (500l) connecting kit – For reversible models (for R32 H HT, H-Split, Ref Split and Monobloc)
EKEPRHLT3HX	Thermal store (300l) connection kit – For heating only and reversible models (for R32 H HT, H-Split, Ref Split and Monobloc)
EKUMBPART	3rd party tank connection kit - Dry pocket sensor
K.ELECMETV	Electric meter for domestic RHI - Single-phase (Metering for performance compliant) MID Class A electric meter to measure the electricity consumption of the Daikin Altherma heat pump
K.ELECMETW	Electric meter for domestic RHI - Three-phase (Metering for performance compliant) MID Class A electric meter to measure the electricity consumption of the Daikin Altherma heat pump
EKCC8-W	Sequence Controller
DCOM-LT/IO	Daikin Altherma I/O (Sequence Controller/Voltage/Resistance/Smart Grid) Gateway
DCOM-LT/MB	Daikin Altherma Modbus Gateway
EKTESE1	sensor+25m cable EKHWSU
EKTESE2	sensor+25m cable EKHWSU
EKMIKPOA	Mixing kit - PCB only
EKMIKPHA	Mixing kit - PCB with Hydraulic
EKMIKHMA	Hydraulics - Mixed Pump Ground
EKMIKHUA	Hydraulics - Unmixed Pump Ground
EKMIKBVA	Balancing Vessel
EKMIKDIA	Distributor for Balancing Vessel
EKMIBHP	R32 Monobloc valve for BUH option used with EBLA models

Notes:

- i) User interface (MMI) is supplied with outdoor unit
- ii) EKFLSW2 must be ordered if glycol is present within the system
- iii) Only one optional remote sensor can be installed
- iv) For compatible cylinders, see pages 12-15

Thermal stores and tanks

Hot water heating installation options

Energy-efficient hot water storage

Our high performance cylinders and thermal stores are designed to meet the demand for the domestic hot water across a range of applications. With low heat losses and large coil areas, Daikin hot water cylinders are manufactured in consideration of all the requirements which come with our modern lifestyles.

With so many different designs and shapes to choose from, our customers can have a peace of mind by knowing that they can select a cylinder which will meet all the specifications for their project.

All our cylinders are WRAS approved, with most of them having ErP ratings of B. When choosing our cylinders, you can rest assured that these products provide high efficiency with minimum heat loss and therefore help to protect the environment.

All our indirectly heated unvented cylinders as well as thermal stores come with a promise to deliver a high quality and reliable performance.

Pre-plumbed R32 cylinder

The perfect partner to a Daikin Altherma Monobloc

- › Available in 150, 180, 210, 250 and 300 litres in stainless steel UK.PPC/R32 and slimline version in 150 and 180 litres.

Efficiency

- › High-quality insulation keeps heat loss to a minimum
- › With on board pump and 20L buffer vessel, these pre-plumbed cylinders can also be used as a hydraulic separation between the primary and secondary circuits.
- › Plug & play installation, all key hydraulics included to ensure a fast and easy installation

Reliability

- › Built-in 20 litre buffer vessel, which can also be used as hydraulic separation and pre-fitted pump and magnetic filter to ensure the best performance from the Daikin Altherma Monobloc





Domestic hot water tank

Stainless steel domestic hot water tank

- › Available in 150, 180, 200, 250 and 300 litres in stainless steel EKHWS(U)-D

Efficiency

- › High-quality insulation keeps heat loss to a minimum
- › Efficient temperature heating: from 10°C to 50°C in only 60 minutes
- › Available as an integrated solution or separate tank

Reliability

- › At necessary intervals, the unit can heat up water up to 60°C to prevent the risk of bacteria growth



Thermal store range

Thermal store: additional hot water comfort

Combine your heat pump with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

Efficiency

- › Fit for the future: maximise renewable energy sources
- › Intelligent Heat Storage Management: ensures continuous heating during defrost mode, and uses stored heat for space heating
- › High-quality insulation keeps heat loss to a minimum

Reliability

- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no water loss through the safety valve



Pre-Plumbed R32

Domestic hot water cylinder			UK.PPC150/R32	UK.PPC180/R32	UK.PPC210/R32	UK.PPC250/R32	UK.PPC300/R32
Description			150l pre-plumbed cylinder	180l pre-plumbed cylinder	210l pre-plumbed cylinder	250l pre-plumbed cylinder	300l pre-plumbed cylinder
Suitable for			Daikin Altherma R32 Monobloc				
Energy efficiency class			B	B	C	C	C
Standing heat loss (ErP)			54	58	63	88	96
Storage volume			148	179	209	248	301
Standing heat loss			1.29	1.39	1.50	2.10	2.29
Max water temperature			90	90	90	90	90
Pump	Quantity		1	1	1	1	1
	Nr of Speeds		PWM	PWM	PWM	PWM	PWM
	Nominal ESP		80	80	80	80	80
	Power Input		52	52	52	52	52
	Primary immersion heater capacity		3	3	3	3	3
Primary immersion heater power supply			1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz
Primary immersion heater recommended fuses			16	16	16	16	16
Secondary immersion heater capacity			3	3	3	3	3
Secondary immersion heater power supply			1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz
Secondary immersion heater recommended fuses			16	16	16	16	16
Height			1550	1676	1864	2164	2165
Diameter			550	550	550	550	600
Empty weight			48	58	61	73	88
Material inside cylinder			Stainless steel 2304				
Piping connections (diameter)	Water inlet H/E		28	28	28	28	28
	Water outlet H/E		28	28	28	28	28
	Cold water in		22	22	22	22	22
	Hot water out		22	22	22	22	22
	Space heating flow		28	28	28	28	28
	Space heating return		28	28	28	28	28



Domestic hot water cylinder			UK.PPC150SL/R32		UK.PPC180SL/R32	
Description			150l slimline pre-plumbed cylinder		180l slimline pre-plumbed cylinder	
Suitable for			Daikin Altherma R32 Monobloc			
Energy efficiency class			B		B	
Standing heat loss (ErP)			52		58	
Storage volume			152		178	
Standing heat loss			1.23		1.39	
Max water temperature			90		90	
Pump	Quantity		1		1	
	Nr of Speeds		PWM		PWM	
	Nominal ESP		80		80	
	Power Input		52		52	
	Primary immersion heater capacity		3		3	
Primary immersion heater power supply			1-phase / 230V / 50Hz		1-phase / 230V / 50Hz	
Primary immersion heater recommended fuses			16		16	
Secondary immersion heater capacity			3		3	
Secondary immersion heater power supply			1-phase / 230V / 50Hz		1-phase / 230V / 50Hz	
Secondary immersion heater recommended fuses			16		16	
Height			1869		2085	
Diameter			475		475	
Empty weight			61		69	
Material inside cylinder			Stainless steel 2304		Stainless steel 2304	
Piping connections (diameter)	Water inlet H/E		28		28	
	Water outlet H/E		28		28	
	Cold water in		22		22	
	Hot water out		22		22	
	Space heating flow		28		28	
	Space heating return		28		28	

Hot Water Cylinder

Domestic hot water cylinder		SB.EKHWSU150/EKEXP	SB.EKHWSU180/EKEXP	SB.EKHWSU200/EKEXP	SB.EKHWSU250/EKEXP	SB.EKHWSU300/EKEXP
Description		150L unvented cylinder (Including EKEXPVES)	180L unvented cylinder (Including EKEXPVES)	200L unvented cylinder (Including EKEXPVES)	250L unvented cylinder (Including EKEXPVES)	300L unvented cylinder (Including EKEXPVES)
Suitable for		R32 Split and Monobloc systems				
Energy efficiency class		B	B	B	B	B
Standing heat loss (ErP)		W	50	55	60	68
Storage volume		litres	145	174	242	292
Standing heat loss		kWh/24h	1.1	1.2	1.3	1.4
Max water temperature		°C	75	75	75	75
Booster heater capacity		kW	3	3	3	3
Power supply		1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz
Recommended fuses		A	20	20	20	20
Height		mm	1015	1175	1553	1763
Diameter		mm	595	595	595	595
Empty weight		kg	45	50	53	58
Material inside cylinder		Stainless steel (EN 1.4521)				
Piping connections (diameter)	Water inlet H/E	inch	3/4" (female)	3/4" (female)	3/4" (female)	3/4" (female)
	Water outlet H/E	inch	3/4" (female)	3/4" (female)	3/4" (female)	3/4" (female)
	Cold water in	inch	3/4" (female)	3/4" (female)	3/4" (female)	3/4" (female)
	Hot water out	inch	3/4" (female)	3/4" (female)	3/4" (female)	3/4" (female)



Features:

- › This stainless steel unvented cylinder is the ideal partner for Daikin Altherma R32 Split and Low temperature monobloc systems
- › Fitted with a 3kW immersion heater as standard
- › Available in 150, 180, 200, 250 and 300 litres in stainless steel EKHWS(U)-D
- › Quick and easy installation with semi pre-plumbed G3 safety kit included
- › Supplied with 3-way valve

EKHWP-PB

Thermal Store

Thermal Store			EKHWP300PB	EKHWP500PB
Description			Thermal Store 300 litre (compatible with pressurised solar)	Thermal Store 500 litre (compatible with pressurised solar)
Dimensions	Height x Width x Depth	mm	1650 x 595 x 615	1660 x 790 x 790
Weight		kg	58	89
Energy efficiency class			B	B
Standing heat loss (ErP)			64	72
Water volume		litres	294	477
Max. water emperature		°C	85	85
Insulation ^[1]		kWh/24h	1.5	1.7
Heat Exchanger (Heat Source)	Material		Stainless Steel (DIN1.4404)	Stainless Steel (DIN1.4404)
	Surface Area	m ²	2.7	3.8
	Internal coil volume	litres	13.2	19
Heat Exchanger (Domestic hot water)	Material		Stainless Steel (DIN1.4404)	Stainless Steel (DIN1.4404)
	Surface Area	m ²	5.6	5.8
	Internal coil volume	litres	27.1	29.0
Heat Exchanger (Pressurised Solar)	Material		Stainless Steel (DIN1.4404)	Stainless Steel (DIN1.4404)
	Surface Area	m ²	0.8	1.7
	Internal coil volume	litres	4.2	12.5
Thermal Performance	Hot water volume without reheating at draw-off rate 12l/m	litres	153 ^[2]	282 ^[2]
			252 ^[3]	240 ^[3]
			321 ^[4]	444 ^[4]
	Hot water volume without reheating at draw-off rate 8l/m	litres	284 ^[2]	324 ^[2]
			283 ^[3]	288 ^[3]
			352 ^[4]	492 ^[4]
Piping connections (diameter)	Heat source in/out	inch	G 1" (female) / 1" (male)	G 1" (female) / 1" (male)
	Potable water in/out	inch	G 1" (female) / 1" (male)	G 1" (female) / 1" (male)
	Pressurised solar in/out	inch	G 3/4" (female) / 1" (male)	G 3/4" (female) / 1" (male)



EKHWP300B



EKHWP500B

Features:

- › This hot water thermal storage tank provides instantaneous hot water and serves as a heat storage medium
- › Tank designed for connection with pressurised thermal solar system
- › Tank designed for connection with drainback thermal solar system
- › Available in 300 and 500 liters
- › Large hot water storage tank to provide domestic hot water at any time
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › Space heating support possible (500l tank only)

[1] Heat loss according to EN12897 and EN 15332

[2] Inlet temperature = 10°C / Tapping temperature = 40°C / Storage temperature = 50°C

[3] Inlet temperature = 10°C / Tapping temperature = 40°C / Storage temperature = 60°C

[4] Inlet temperature = 10°C / Tapping temperature = 40°C / Storage temperature = 65°C


Accessories:

Accessory Ref	Description
165215	Fill and drain connection - Recommended to be ordered with every thermal store
165070	Gravity break set - Avoids thermal heat loss from thermal store due to thermo-siphon effect.
164102-RTX	Solar flow setter - Flow regulating valve with flow indicator (2-16 l/min), for balancing solar flow in cascade installations
165113	Secondary circulation kit - connection for secondary hot water connections
EKBH35	3kW immersion heater for thermal store

Accessory Ref	Description
EKEPHYHT35H	300l thermal store connection kit (R32 Hybrid)
EKEPRHLT3HX	300l Thermal store connection kit - Heating only & Reversible (R32 H HT, H-Split, R-Split and Monobloc)
EKEPRHLT5H	500l Thermal store connection kit - Heating only (R32 H HT, H-Split, R-Split and Monobloc)
EKEPRHLT5X	500l Thermal store connection kit - Reversible (R32 H HT, H-Split, R-Split and Monobloc)
EKEPHT3H	300L Thermal Store connection kit (R410 Hybrid/HT R-Split)
EKEPHT5H	500L Thermal Store connection kit (R410 HT R-Split)

Onecta App

Now available with voice control

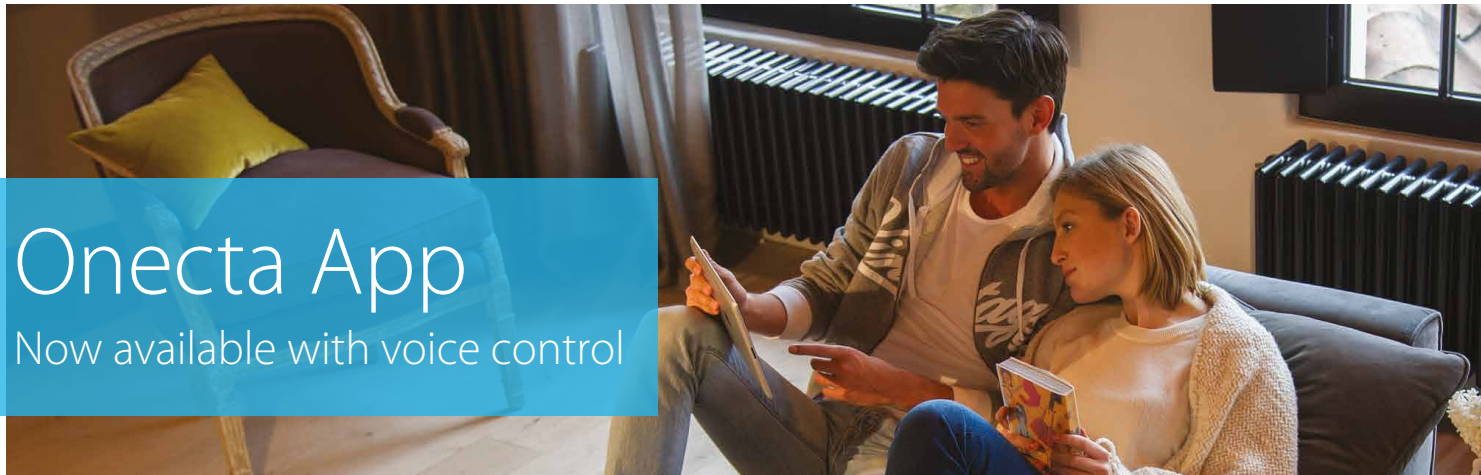

The Onecta App is for those who live their life on the go and who want to manage their heating system from their smartphone.




NEW onecta


Voice control

To provide users with even more comfort and ease, the Onecta App now offers voice control. This hands-free feature cuts down on clicks to manage units faster than ever before.


Cross-functional and multilingual, voice control pairs well with any smart device, including Google Assistant and Amazon Alexa.

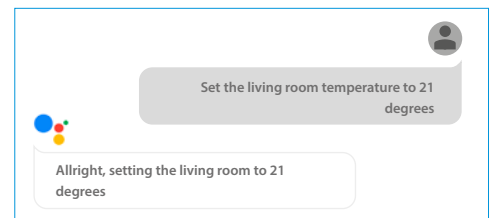

Example of using the voice control via Google Assistant

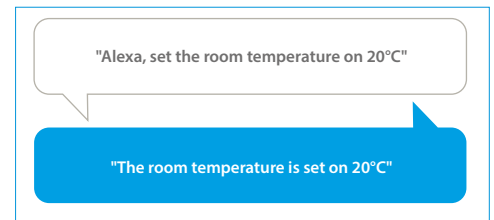

Example of using the voice control via Amazon Alexa

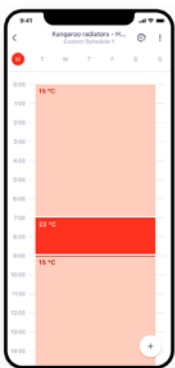

Schedule

Set up a programme outlining when the system should operate, and create up to six actions per day.


- Schedule room temperature and operation mode
- Enable holiday mode to save costs



Monitor

Receive a thorough overview of how the system is performing and how much energy it consumes.

- Check the status of the heating system
- Access energy consumption graphs (day, week, month)

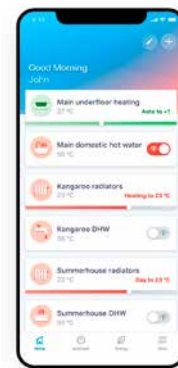

Control

Customise the system to fit your lifestyle and year-round comfort levels.

- Change room and domestic hot water temperature
- Turn on powerful mode to boost hot water production

Function availability depends on the system type, configuration and operation mode.

The app functionality is only available if both the Daikin system and the app have a reliable internet connection.



Scan the QR code to download the app now

User-friendly wired remote controller with premium design

Madoka



Black
RAL 9005 (matt)
BRC1HHDK



White
RAL9003 (glossy)
BRC1HHDW



Silver
RAL 9006 (metallic)
BRC1HHDS

Madoka combines refinement and simplicity

- > Sleek and elegant design
- > Intuitive touch-button control
- > Three colours to match any interior
- > Compact: measures only 85 x 85 mm

Award-winning design

Madoka received an IF Design Award and Reddot Product Design Award for its innovative design. These awards represent two of the most prestigious and largest design competitions in the world.

Easy update via Bluetooth

It is strongly recommended to make sure that the user interface is up to date. To update the software or check if updates are available, all you need is a mobile device and the Madoka Assistant app. The app is available on Google Play and in the App Store.




reddot award 2018
winner



NEW

Man-machine interface

Inspired from the design awarded Daikin Altherma third generation interface of indoor units, this new controller gathers all benefits:



The Daikin Eye

The intuitive Daikin eye shows you in real time the status of the system. Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit via the new interface in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation


Work super-fast with the new interface. It's super easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

WLAN cartridge connection

Discreet thanks to small dimensions
H x W x D 136 x 160 x 37 mm

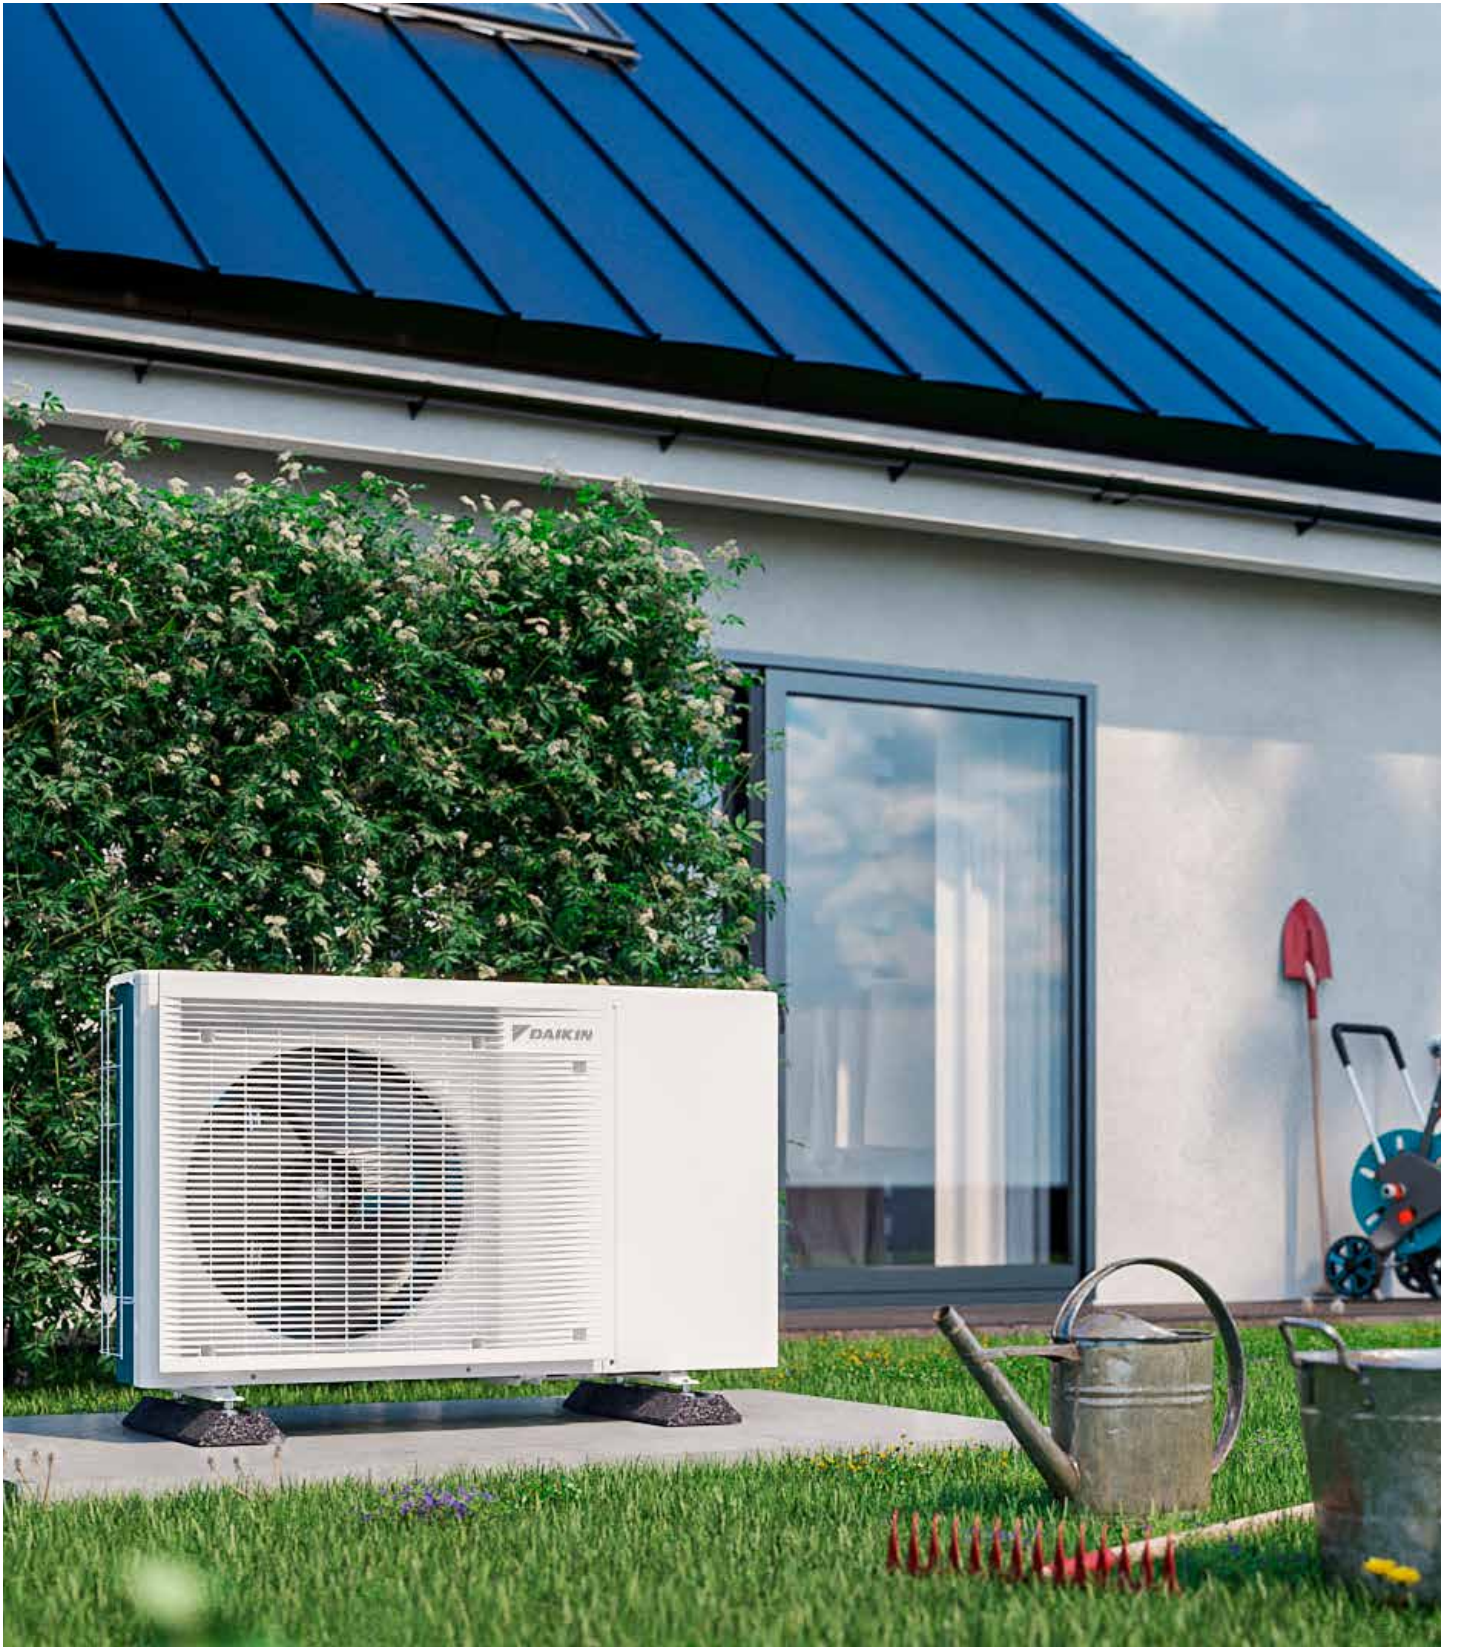

Stand By Me

A complete customer after-care solution.

With your customer's new Daikin installation and Stand By Me warranty and maintenance options, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market. Stand By Me provides an easy way to hand over the system to your customer. Simply complete the commissioning details on standbyme.daikin.co.uk, add your customer's email address and they will receive a code so they can create an account on Stand By Me and select their warranty and maintenance options.



Installation database

Stand By Me provides a live dashboard of your project leads and, once the system is commissioned, your existing installations. So you can review and manage which products were installed, where and when.



Easy commissioning

Hand over couldn't be simpler either. Simply complete the commissioning details, add your customer's email address and they will receive a code so they can create an account on **Stand By Me** and select their warranty and maintenance options.



End user warranty registration

Warranty registration (previously on KEY) is now all done on **Stand By Me**. Once you've commissioned the system and emailed the code to your customer, your database will show you if the end-user has completed the warranty registration and the length of time remaining on their warranty*.



Annual maintenance records

Stand By Me provides an easy way to review the annual maintenance schedules for each site and track any repairs carried out.



RHI remote monitoring


Stand By Me means that social housing providers no longer need physical access to properties in order to read meters for RHI reports. Remote monitoring of meters on **Stand By Me** provides a daily summary of the energy produced, consumed and the system efficiency, which can be submitted to Ofgem for RHI reporting. The Daikin remote metering cloud has been designed specifically for Daikin Altherma Hybrid systems and connects with your installed meters to provide all the information needed for quarterly RHI reporting.

Heating Solutions Navigator

The Heating Solutions Navigator is a versatile toolkit on Stand By Me, which brings together all the tools required to complete the design and selection of a system and allows you to showcase Daikin heating solutions to your customers.

The Heating Solutions Navigator helps you to:

- › Quickly see the wide array of Daikin Heating Solutions available
- › Check all the options specifically for your installation
- › Link easily to the installation specific literature
- › Estimate the required heat load – from a simple snapshot to a detailed room-by-room calculation
- › Create custom made piping and wiring diagrams
- › Use the flue gas selection tool for gas based solutions
- › Set the configuration of your installation
- › Compare economic and environmental benefits of the Daikin system versus a conventional heating installation
- › Store all your leads on your Stand By Me account
- › Track projects from lead, installation and commissioning to inviting your customers to select after-sales services
- › To request a quotation for DUCO Residential Ventilation System

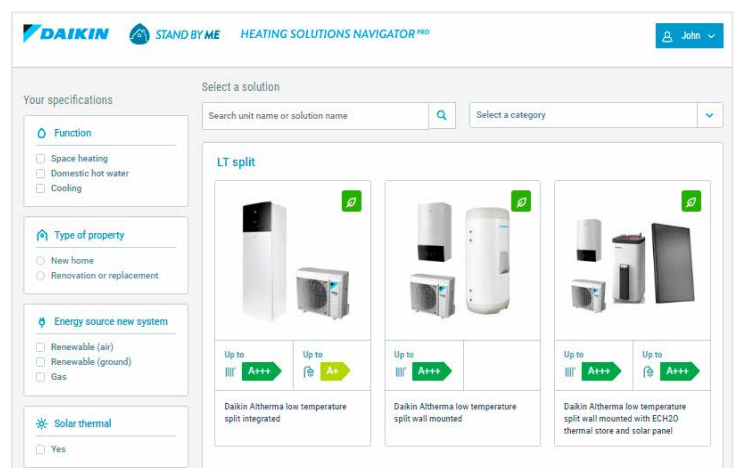



[daikin.co.uk](https://www.daikin.co.uk)

National Heating Installer Hub: 01932 879070

Heating Services Contact Centre: 01932 879271

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

