

TREE / HEDGEROW REMOVAL AND PRUNING WORKS:

Required tree and hedgerow removals are denoted by a dashed tree canopy outline on the Tree Retention and Removal Plan. Pruning and trimming works are denoted by a pink dashed tree canopy line.

To avoid erroneous tree works, the appointed tree constructor will be briefed by an appropriately qualified arboricultural consultant on-site. This will include spray marking of tree removals and the marking out of sections of hedgerow to be removed.

Tree removal and pruning works must be carried out prior to the installation of tree protection barriers. Tree works must be undertaken in accordance with BS3998:2010 by a competent tree contractor and should avoid the main nesting season for birds between 1st March and 31st August each year. If such timescales are unachievable, the advice of an ecologist will need to be sought to determine any further necessary protective and precautionary working measures to avoid disturbance to nesting birds and other wildlife.

Tree Removal Works:

Trees to be removed will be limited to trees T6, T13, T14, T19 and groups G1 and G2. Remaining stumps from felled trees must be carefully ground out as opposed to pulled out with a machine. This is required to avoid disturbance within the rooting environment of retained trees and hedgerows.

Tree Pruning Works:

Tree T3 will be heavily pollarded / crown reduced to a height of 5-6m to tie into the height of the hedgerow. The tree has ash die back and therefore must be dismantled using a MEWP and not climbed.

Tree T15 and T16 will be crown lifted to provide a total clearance of 5.75m over the access track and Hambrook Lane. This is to facilitate to delivery of modular homes on to the site. The pruning works must be completed by the construction of the new road or any road level increase works. The pruning works must be kept to a minimum and not include to removal of any primary limbs.

Hedgerow Works:

Hedgerow H3 will be removed in its entirety. Partial sections of hedgerows H1, H2, H5, H6, H7 and H10 will be removed as shown on the Tree Retention and Removal Plan.

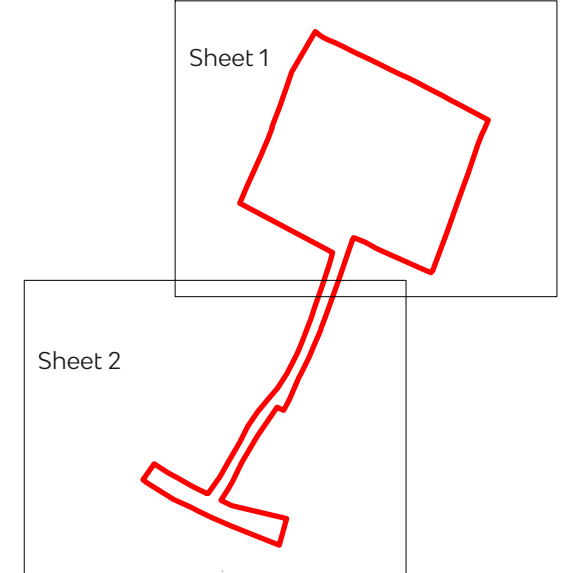
The upper canopy parts of hedgerows H1, H2, H4 and H5 will be pruned back to tie in with the width of the lower parts of the hedgerows to improve its structure as shown on the Tree Retention and Removal Plan. The heights will also be reduced to 5m.

The sides of hedgerows H7, H9 and H10 will be trimmed back in selected areas as shown on the Tree Retention and Removal Plan to accommodate the new footpaths.



Key:

- Site Boundary
- Category A Trees Retained
- Category B Trees Retained
- Category C Trees and Hedgerows Retained
- Category U Trees Removed
- Category C Trees and Hedgerow Removed
- Tree and Hedgerow Pruning Works
- BS 5837 Calculated Tree Shadow Constraints



Project Name
Land at Hoodlands Farm, Harry Stoke

Drawing Title
Tree Retention and Removal Plan

Marsden Estate, Rendcomb, Cirencester, Gloucestershire, GL7 7EX
E: info@tylergrange.co.uk
W: www.tylergrange.co.uk

Scale 1:500 @ A2	Date July 2021
Drawn by JP	Checked by JJ
Drawing No. 11857/P04	Revision A

This document should not be relied on or used in circumstances other than those for which it was prepared and for which Tyler Grange was appointed. Tyler Grange accepts no responsibility for this document to any other party other than the person by whom it was appointed.

Tyler Grange Group Ltd © 2021



TREE / HEDGEROW REMOVAL AND PRUNING WORKS:

Required tree and hedgerow removals are denoted by a dashed tree canopy outline on the Tree Retention and Removal Plan. Pruning and trimming works are denoted by a pink dashed tree canopy line.

To avoid erroneous tree works, the appointed tree contractor will be briefed by an appropriately qualified arboricultural consultant on-site. This will include spray marking of tree removals and the marking out of sections of hedgerow to be removed.

Tree removal and pruning works must be carried out prior to the installation of tree protection barriers. Tree works must be undertaken in accordance with BS3998:2010 by a competent tree contractor and should avoid the main nesting season for birds between 1st March and 31st August each year. If such timescales are unachievable, the advice of an ecologist will need to be sought to determine any further necessary protective and precautionary working measures to avoid disturbance to nesting birds and other wildlife.

Tree Removal Works:

Trees to be removed will be limited to trees T6, T13, T14, T19 and groups G1 and G2. Remaining stumps from felled trees must be carefully ground out as opposed to pulled out with a machine. This is required to avoid disturbance within the rooting environment of retained trees and hedgerows.

Tree Pruning Works:

Tree T3 will be heavily pollarded / crown reduced to a height of 5-6m to tie into the height of the hedgerow. The tree has ash die back and therefore must be dismantled using a MEWP and not climbed.

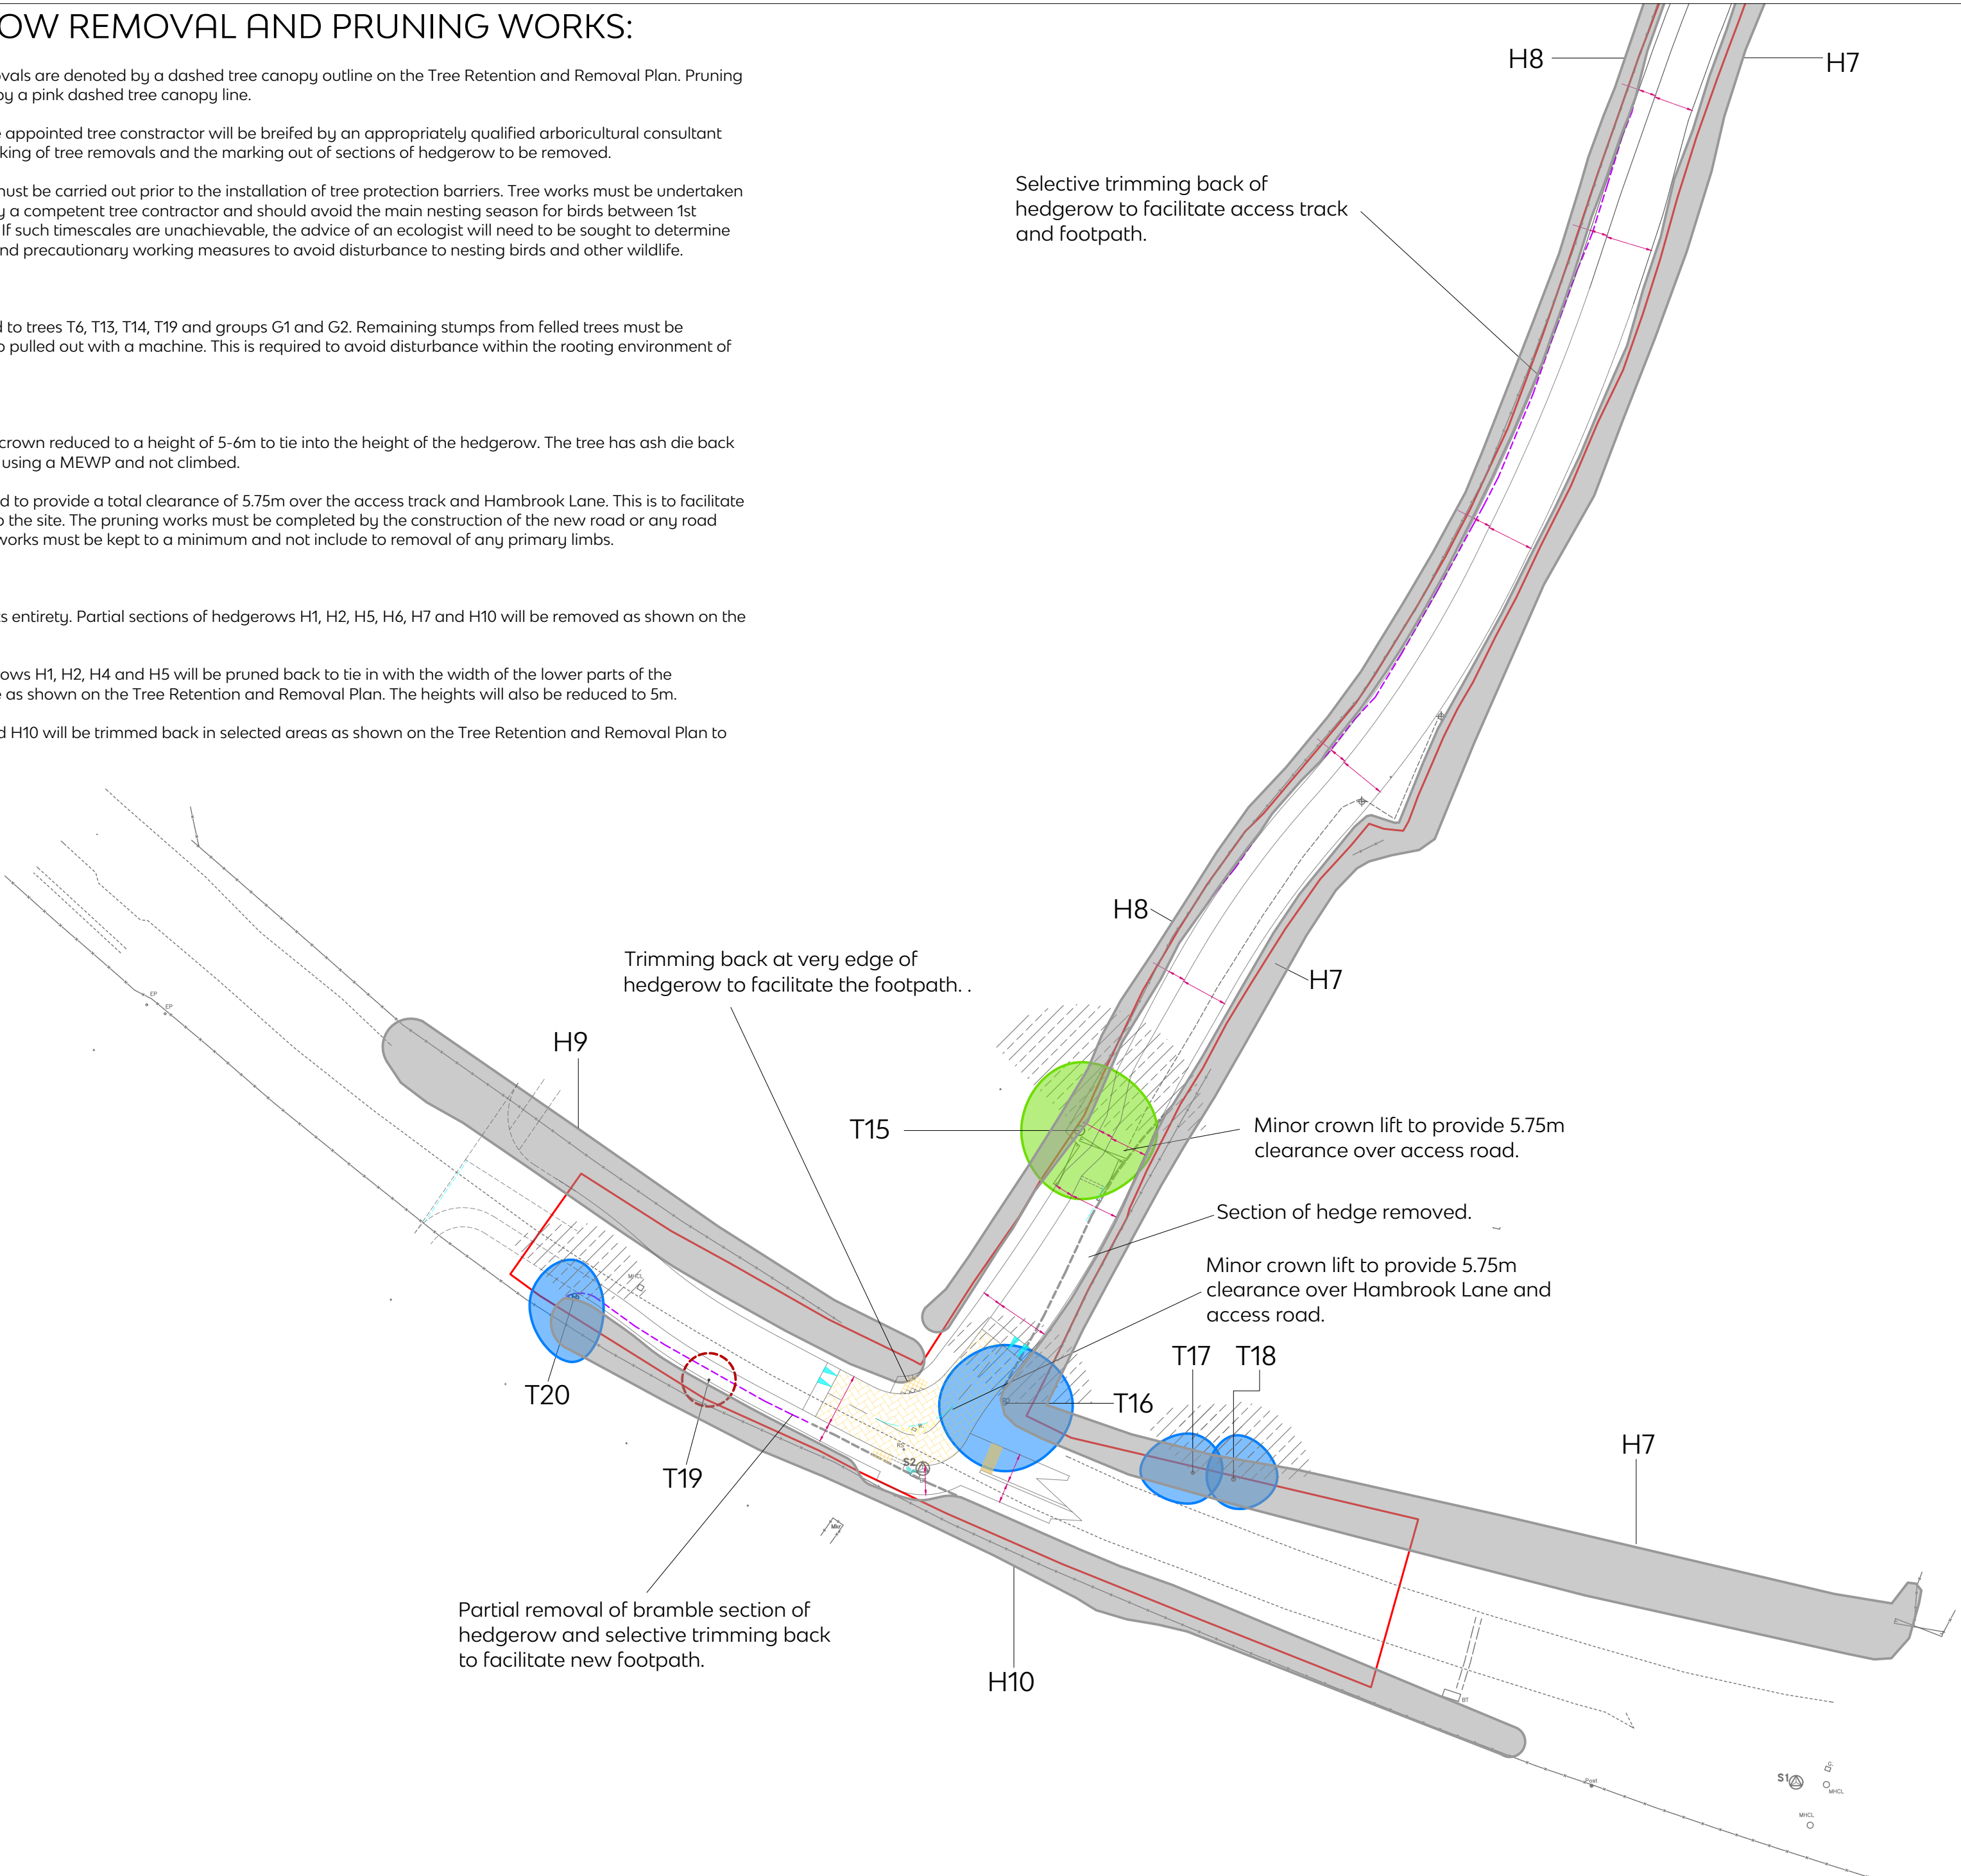
Tree T15 and T16 will be crown lifted to provide a total clearance of 5.75m over the access track and Hambrook Lane. This is to facilitate to delivery of modular homes on to the site. The pruning works must be completed by the construction of the new road or any road level increase works. The pruning works must be kept to a minimum and not include to removal of any primary limbs.

Hedgerow Works:

Hedgerow H3 will be removed in its entirety. Partial sections of hedgerows H1, H2, H5, H6, H7 and H10 will be removed as shown on the Tree Retention and Removal Plan.

The upper canopy parts of hedgerows H1, H2, H4 and H5 will be pruned back to tie in with the width of the lower parts of the hedgerows to improve its structure as shown on the Tree Retention and Removal Plan. The heights will also be reduced to 5m.

The sides of hedgerows H7, H9 and H10 will be trimmed back in selected areas as shown on the Tree Retention and Removal Plan to accommodate the new footpaths.



Selective trimming back of hedgerow to facilitate access track and footpath.

Trimming back at very edge of hedgerow to facilitate the footpath.









Minor crown lift to provide 5.75m clearance over access road.


Section of hedge removed.

Minor crown lift to provide 5.75m clearance over Hambrook Lane and access road.

Partial removal of bramble section of hedgerow and selective trimming back to facilitate new footpath.

Key:

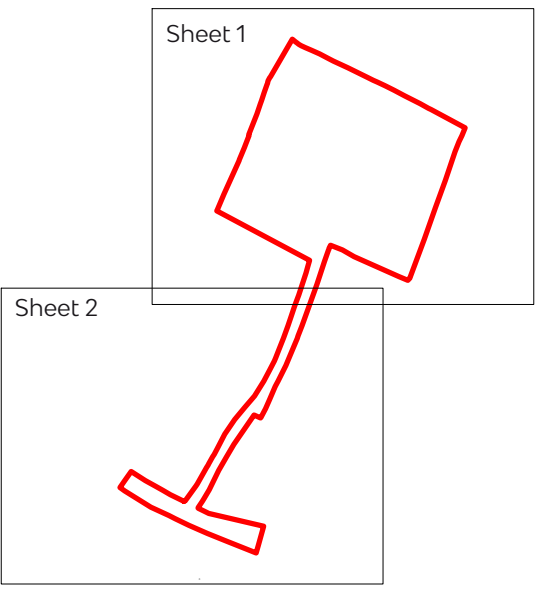-  Site Boundary
-  Category A Trees Retained
-  Category B Trees Retained
-  Category C Trees and Hedgerows Retained
-  Category U Trees Removed
-  Category C Trees and Hedgerow Removed
-  Tree and Hedgerow Pruning Works
-  BS 5837 Calculated Tree Shadow Constraints



Project Name	Land at Hoodlands Farm, Harry Stoke
Drawing Title	Tree Retention and Removal Plan



Marsden Estate, Rendcomb, Cirencester, Gloucestershire, GL7 7EX
 E: info@tylergrange.co.uk
 W: www.tylergrange.co.uk

Scale	1:500 @ A2	Date	July 2021
Drawn by	JP	Checked by	JJ
Drawing No.	11857/P04	Revision	A

This document should not be relied on or used in circumstances other than those for which it was prepared and for which Tyler Grange was appointed. Tyler Grange accepts no responsibility for this document to any other party other than the person by whom it was appointed.

