

# Mendip & Mendip 12.5 Interlocking Concrete Roof Tile

Looking for a local Marley specialist?

A concrete interlocking tile that has instant visual appeal and exceptional strength.

The Mendip tile range is ideal for low pitch roofs, with the Mendip 12.5 performing at pitches as low as 12.5°.

12.5° minimum pitch applies to Mendip 12.5 only. Standard Mendip has a minimum pitch of 15° available in smooth finish tiles; granular finish tiles have a higher minimum pitch requirement



Marley products brochure  
Request Sample

- A+ Environmental credentials (BREEM)
- Compatible with Marley SolarTile®
- Excellent certification for BES 6001
- Available with a wide range of fittings and accessories
- Compatible with our full roof system
- Wide variety of colours available
- 12.5° Minimum pitch
- Cost-effective affordable solution
- Download our Spec Guide

Compatibility, functionality and beautiful aesthetics for the perfect finish across every roof style

Our extensive range of roof fittings and accessories work with all elements of the full Marley Roof System, ensuring product specification and installation is quicker and easier. What's more, a complete Marley Roof System comes with a 15 year guarantee for further security and peace of mind. Take a look at our full range of roof fittings and accessories.

Explore roof fittings



A range of 7 varying colours, all of which are popular with homeowners and housebuilders, offering diverse product selection to complement the tiles profile.

Old English Dark Red

STANDARD MENDIP & MENDIP 12.5

Experiencing the vast variety of textures and colours that our roof tiles provide up close, can guide you in the decision making process when selecting roof coverings. Our efficient sample service can help you in this process.

NB: For all Mendip 12.5 sample requests, please note that you will receive a standard Mendip tile for colour and profile reference. Modifications to the Mendip 12.5 are hidden by the recommended headlap although both versions have the same appearance on the roof.

Request sample

Standard Mendip interlocking tiles can now perform at extended rafter lengths:

15° - 17.5° pitch with a rafter length up to 10m will require a 100mm headlap

17.5° pitch and above with a rafter length up to 10m will require a 75mm headlap

Mendip 12.5 can perform at pitches of 12.5°- 44° with a rafter length up to 6m, which requires a 100mm headlap.

To ensure that your roof is compliant to the new standard, our fixing specification service is available.

A double pantile design with elegant flowing lines and available in 7 stylish colours, the Mendip interlocking tile range is a popular choice with discerning specifiers and builders alike

View Mendip product datasheet

View Mendip 12.5 product datasheet

- Technical Specification - Standard Mendip
- Technical specification - Mendip 12.5

## Technical Data

CAD Drawings BIM Files Request a [Fixing Specification](#), [Estimator](#) or [NBS](#)

Project Files	Save multiple files to a project and download in one handy file	<a href="#">Sign in</a> to your account Don't have an account <a href="#">Create one</a>
---------------	---	---

Add products to your specs with just one click

The new NBS 'Add to spec' button makes it quick and easy to add our products straight into your specifications with full details and technical properties. Just click the 'Add to spec' button opposite to get started.

Add Mendip to spec

Add Mendip 12.5 to spec



## Read through our resources

Read all of our blogs here

Find a Marley stockist!  
A network of merchant partners on hand to help you

Product catalogue  
Download our full roofing product guide

What low pitch products are available

What is the minimum pitch for a roof tile or slate?

## Other Products Related to the Mendip Range


You may be interesting in taking a look at some other products similar to Mendip and Mendip 12.5

Lincoln Clay Pantile

Anglia Single Pantile

Roof System builder  
Find the Accessories that are compatible with the Mendip concrete interlocking tile

All

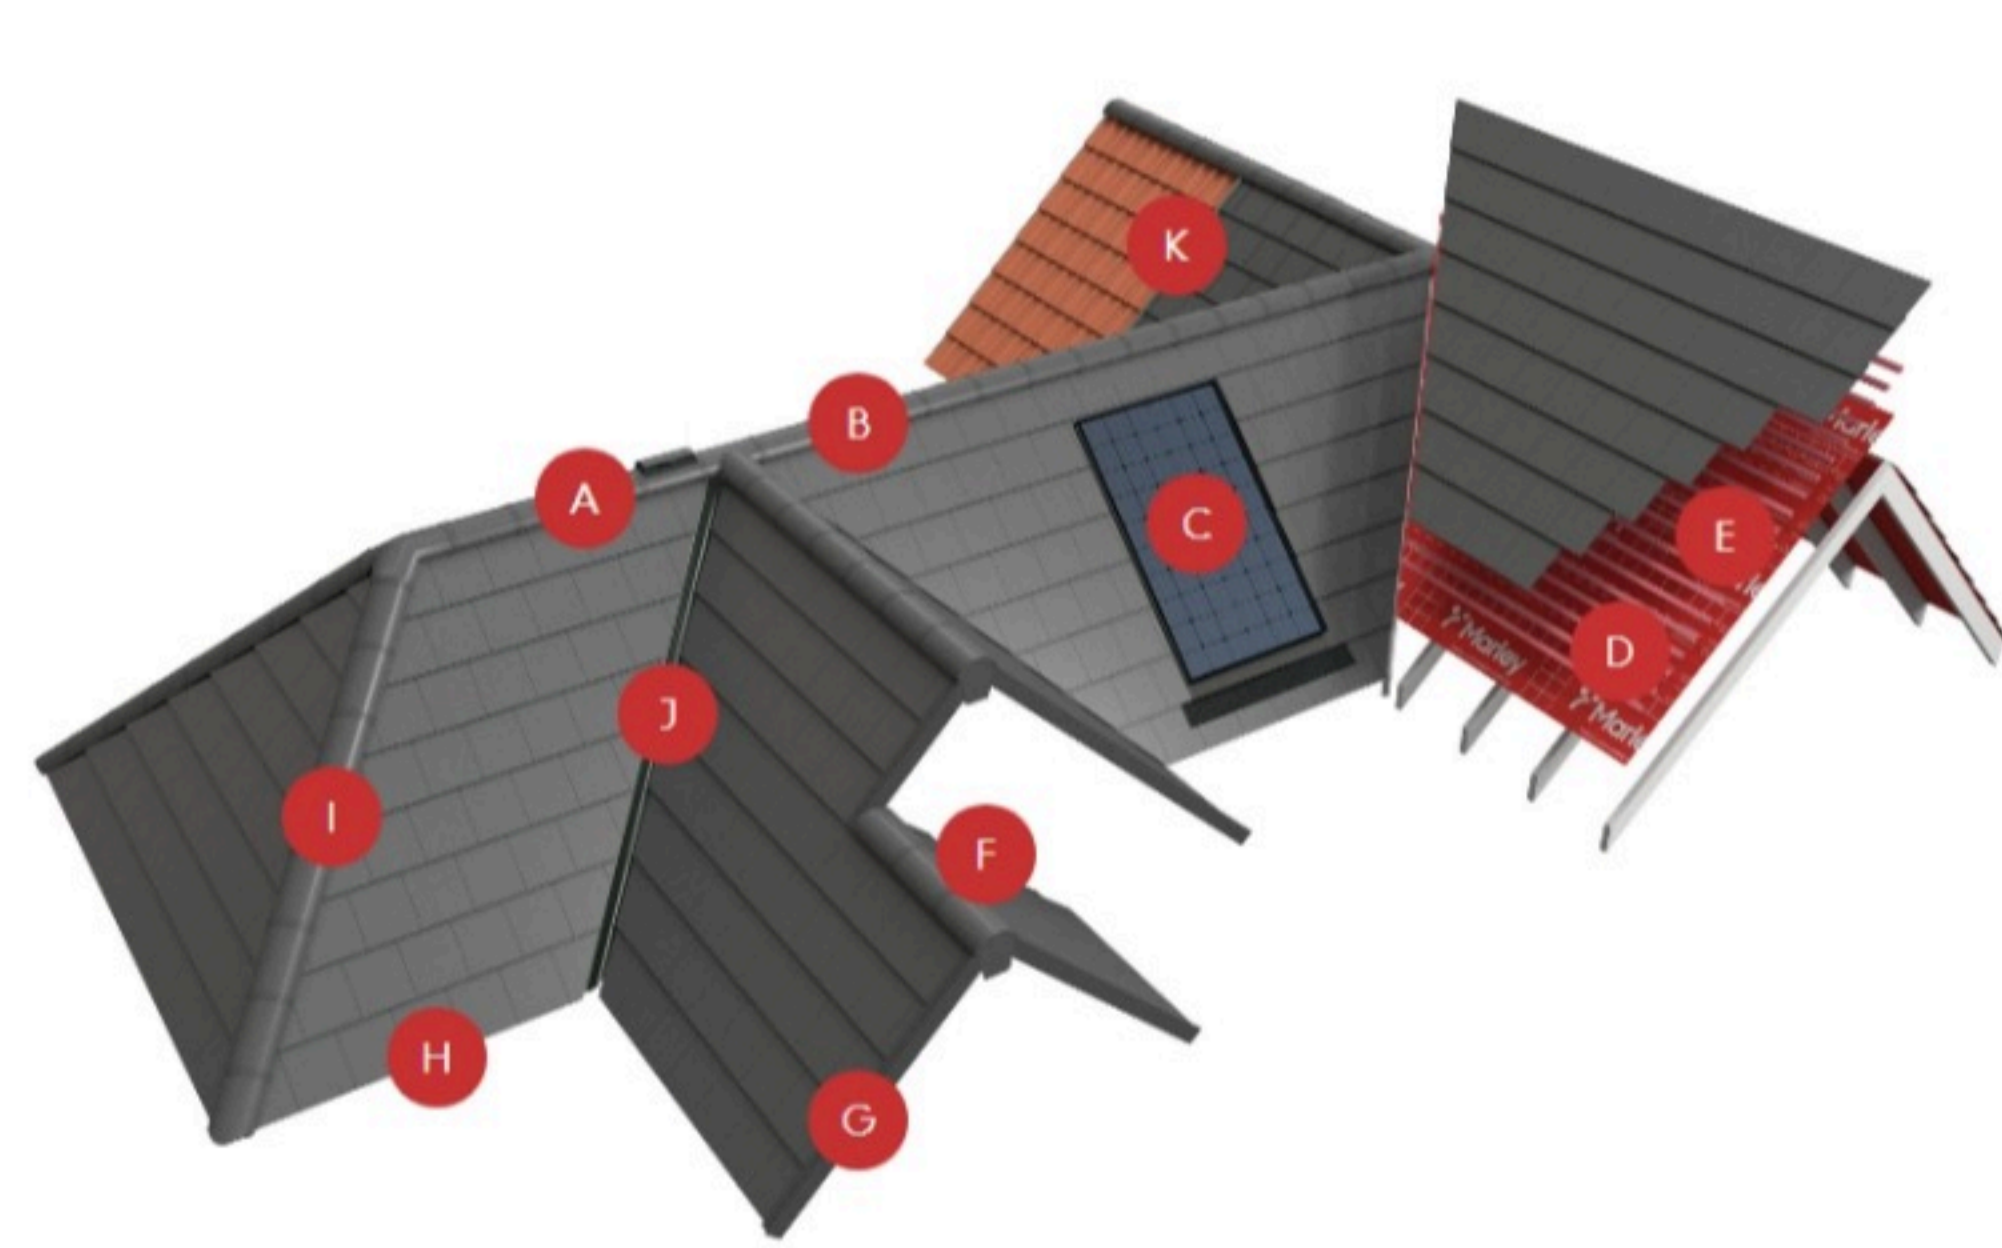

Looking for a specialist?

Enter Postcode

If you would like to speak to somebody about including this product on your project, fill in the postcode and your local's contact details will appear.