


Daikin Altherma 3 Low Capacity Monobloc

Air Clearance Required:

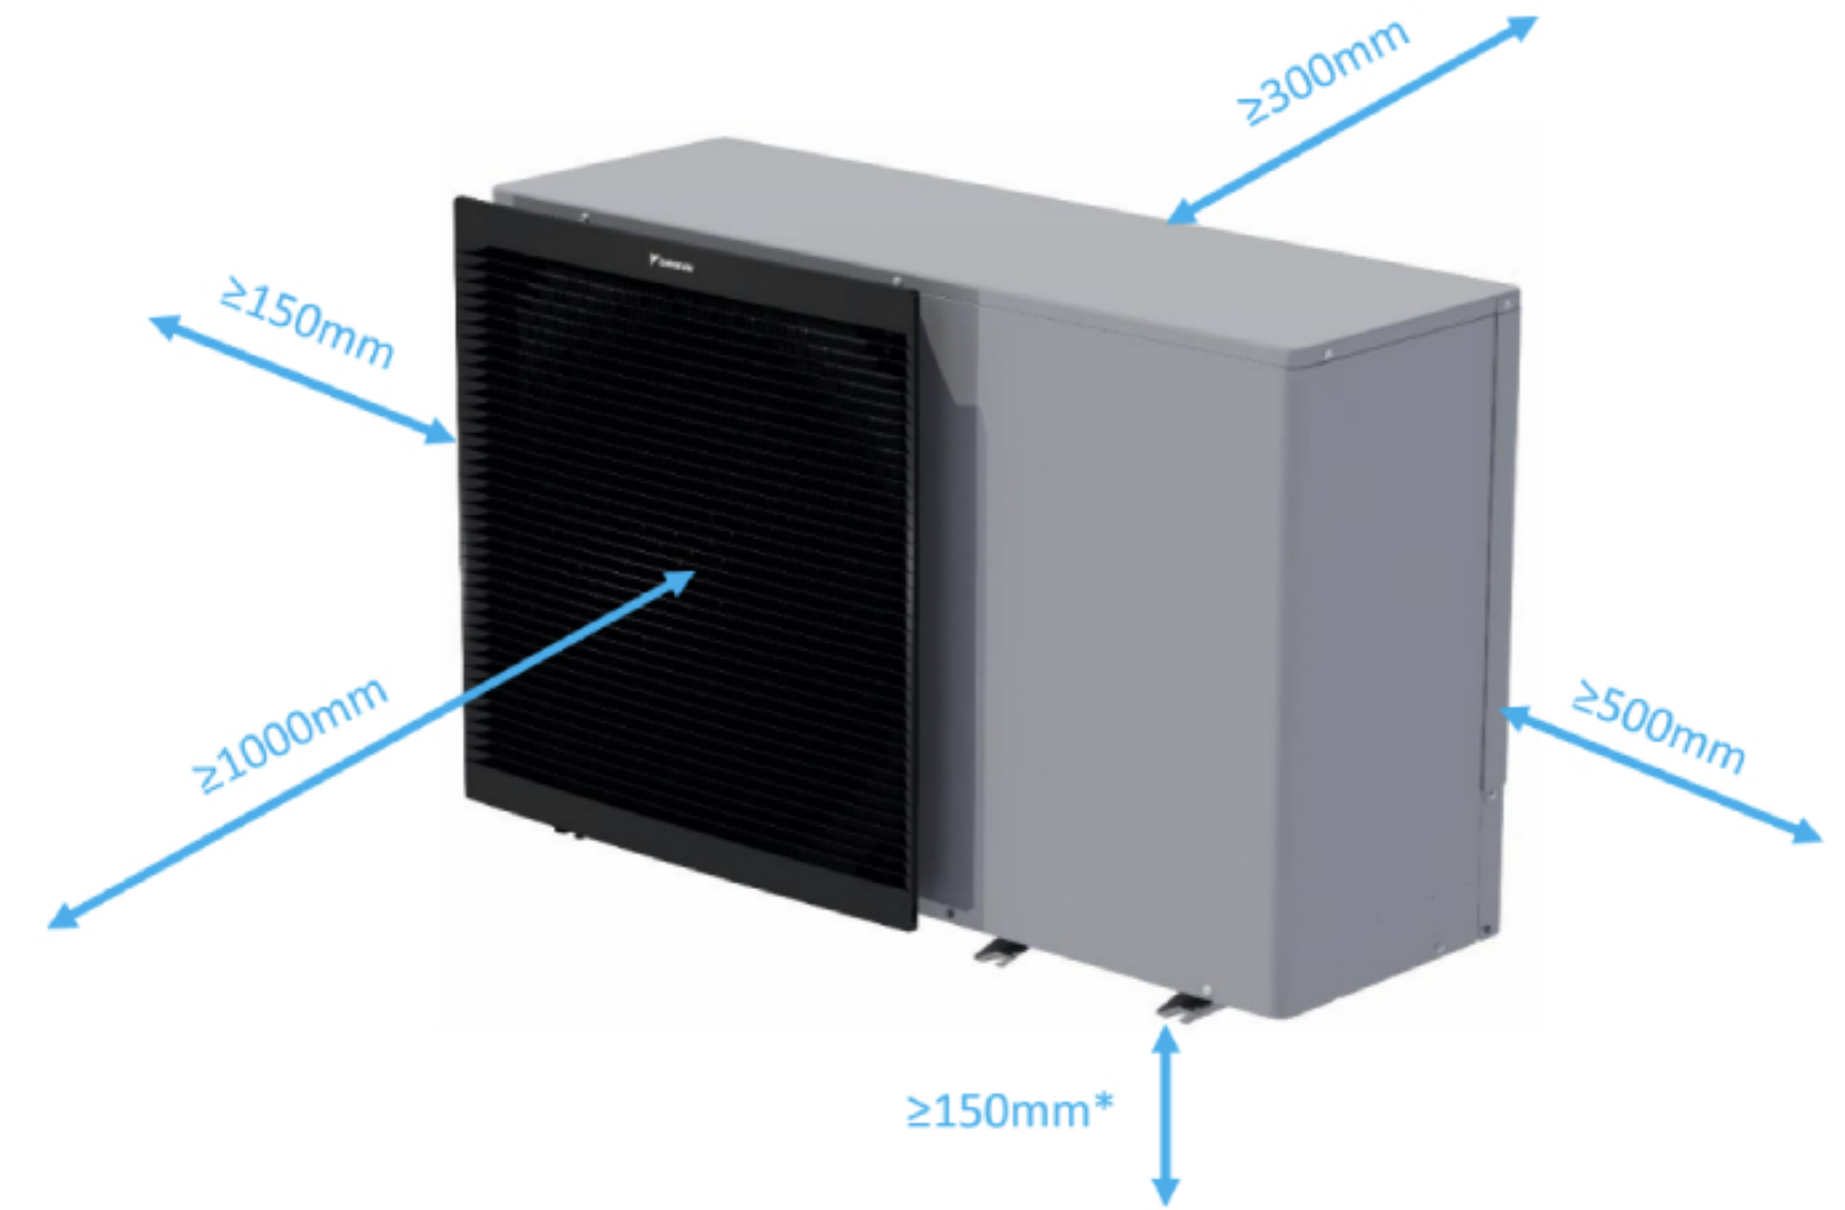


Unit Dimensions Including Feet:

Height 920mm

Width 1250mm

Depth 362mm

Single Unit		EDLA		04E(3)V3	
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)
Power input	Heating	Nom.		kW	0.84 (1) / 1.26 (2)
COP					5.10 (1) / 3.65 (2)
Space heating 	Average climate water outlet 55 °C	General	ηs (Seasonal space heating efficiency)		127
			SCOP		3.26
	Average climate water outlet 35 °C	General	ηs (Seasonal space heating efficiency)		176
			SCOP		4.48
			Seasonal space heating eff. class		A+++
Casing	Colour	Ivory white			
	Material	Zinc coated low carbon steel			
Dimensions	Unit	HeightxWidthxDepth		mm	770 x 1,250 x 362
Weight	Unit			kg	EV3: 88, E3V3: 91
Compressor	Quantity	1			
	Type	Hermetically sealed swing compressor			
Operation range	Heating	Ambient	Min.~Max.	°CWB	-25 ~ 25
		Water side	Min.~Max.	°C	EV3: 9 ~ 65 / E3V3: 15 ~ 65
	Domestic hot water	Ambient	Min.~Max.	°CDB	-27 ~ 35
		Water side	Min.~Max.	°C	25 ~ 55
Refrigerant	Type	R-32			
	GWP	675			
	Charge			kg	1.85
	Charge			TCO2Eq	0.91
	Control	Expansion valve			
Sound power level	Heating	Nom.		dB(A)	58
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230
Current	Recommended fuses			A	20

(1) Cooling Ta 35°C - LWA 18°C (DT=5°C), Heating Ta DB/WB 7°C/6°C - LWC 35°C (DT=5°C) (2) Cooling Ta 35°C - LWA 7°C (DT=5°C), Heating Ta DB/WB 7°C/6°C - LWC 55°C (DT=5°C). This product contains fluorinated greenhouse gases.

*Domestic hot water in combinations with stainless steel tank EKHWS(U)-D and ECH₂O thermal store EKHWP-(P)B.