NOTES
1. ALL DIMENSIONS TO BE CHECKED ON SITE AND THE ARCHITECT/CLIENT MADE AWARE OF ANY DISCREPANCIES AND ADJUSTMENTS REQUIRED.
2. DO NOT SCALE OFF DRAWING
3. ALL CONSTRUCTION MUST COMPLY TO THE CURRENT BUILDING REGULATIONS AND BRITISH STANDARDS.
4. THE DIMENSION SHOWN ARE APPROXIMATE ONLY AND ALL SETTING OUT IS THE RESPONSIBILITY OF THE CONTRACTOR. THIS IS AN EXISTING BUILDING AND DIMENSIONS VARY. THEREFORE, WE RECOMMEND YOU SET OUT THE WORKS AS PER THE DIMENSIONS AND ADJUST AS REQUIRED TO MAKE THEM CORRECT FOR THE EXISTING BUILDING. THIS MUST BE DONE PRIOR TO CONSTRUCTION.

5m 4 3 2 1 0 5m 10m
SCALE 1:100

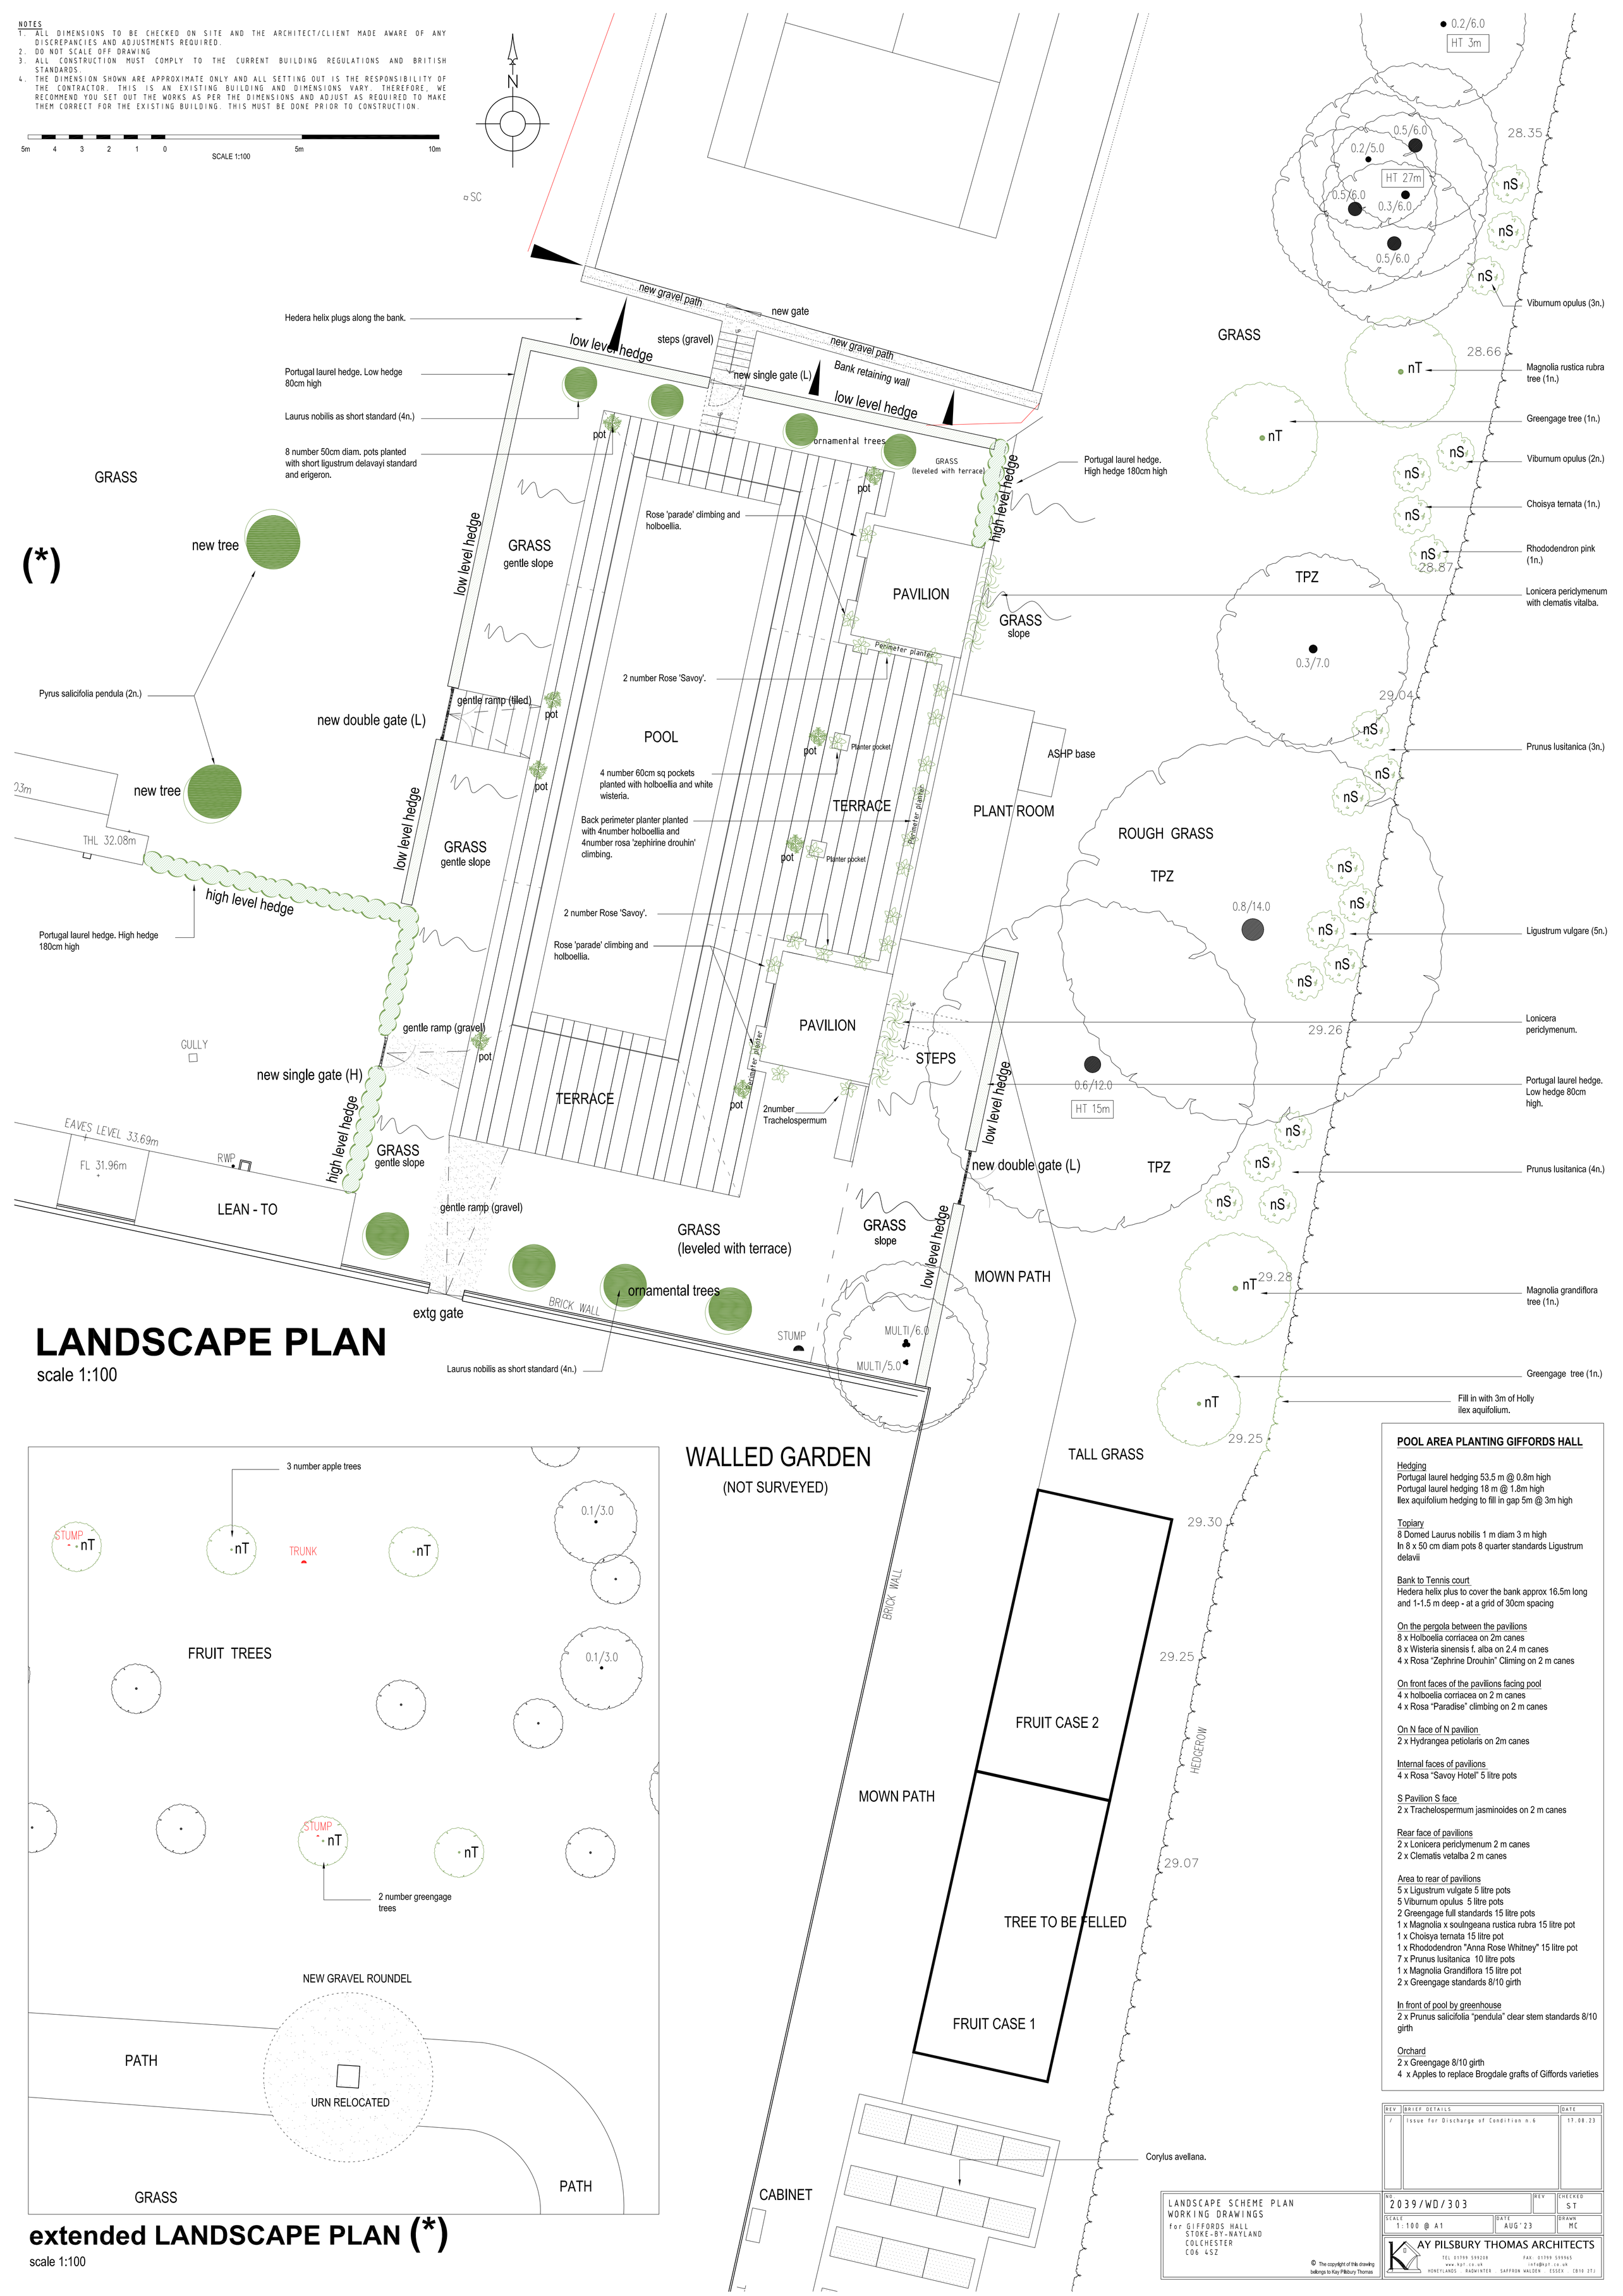

LANDSCAPE PLAN
scale 1:100

extended LANDSCAPE PLAN (*)
scale 1:100

POOL AREA PLANTING GIFFORDS HALL

Hedging
Portugal laurel hedging 53.5 m @ 0.8m high
Portugal laurel hedging 18 m @ 1.8m high
Ilex aquifolium hedging to fill in gap 5m @ 3m high

Topiary
8 Domed Laurus nobilis 1 m diam 3 m high
In 8 x 50 cm diam pots 8 quarter standards Ligustrum delavii

Bank to Tennis court
Hedera helix plus to cover the bank approx 16.5m long and 1-1.5 m deep - at a grid of 30cm spacing

On the pergola between the pavilions
8 x Holboelia corriacea on 2m canes
8 x Wisteria sinensis f. alba on 2.4 m canes
4 x Rosa "Zephrine Drouhin" Climing on 2 m canes

On front faces of the pavilions facing pool
4 x holboelia corriacea on 2 m canes
4 x Rosa "Paradise" climbing on 2 m canes

On N face of N pavilion
2 x Hydrangea petiolaris on 2m canes

Internal faces of pavilions
4 x Rosa "Savoy Hotel" 5 litre pots

S Pavilion S face
2 x Trachelospermum jasminoides on 2 m canes

Rear face of pavilions
2 x Lonicera periclymenum 2 m canes
2 x Clematis vetalba 2 m canes

Area to rear of pavilions
5 x Ligustrum vulgate 5 litre pots
5 Viburnum opulus 5 litre pots
2 Greengage full standards 15 litre pots
1 x Magnolia x soulngeana rustica rubra 15 litre pot
1 x Choisya ternata 15 litre pot
1 x Rhododendron "Anna Rose Whitney" 15 litre pot
7 x Prunus lusitanica 10 litre pots
1 x Magnolia Grandiflora 15 litre pot
2 x Greengage standards 8/10 girth

In front of pool by greenhouse
2 x Prunus salicifolia "pendula" clear stem standards 8/10 girth

Orchard
2 x Greengage 8/10 girth
4 x Apples to replace Brogdale grafts of Giffords varieties

REV	BRIEF DETAILS	DATE
/	Issue for Discharge of Condition n.6	17.08.23

LANDSCAPE SCHEME PLAN
WORKING DRAWINGS
for GIFFORDS HALL
STOKE-BY-NAYLAND
COLCHESTER
CO6 4SZ

© The copyright of this drawing belongs to Kay Pilsbury Thomas

NO 2039/WD/303 | REV | CHECKED ST
SCALE 1:100 @ A1 | DATE AUG'23 | DRAWN MC

KAY PILSBURY THOMAS ARCHITECTS
TEL 01799 599208 FAX 01799 599965
www.kpt.co.uk info@kpt.co.uk
HONEYLANDS . RADWINTER . SAFFRON WALDEN . ESSEX . CB10 2TJ