


Details of tree inspections

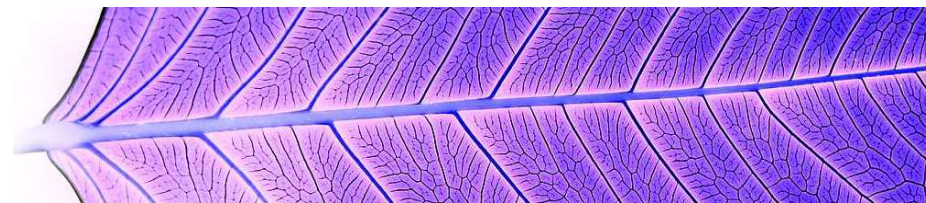

Site name: 10 Thistlecroft, DH5 8LT

Risk zone: Not Applicable

Contact:

Trees: 10 Work items: 10

Ref.	Species	Description	Measurements	Survey Notes	Overall Condition	Recommendations
T 01	European lime (Tilia x europaea)	Target - dwelling. Target - footpath. Target - overhead wires. Target - road. Target - fence	Height (m): 15 DBH (cm): 37 Life Stage: Early Mature Life Exp.: 30+ Years	15% of crown is dead wood, snapped, hanging branch in upper crown. Of otherwise fair overall condition. Risk Category = Medium	Fair	Remove dead wood & hanging branch Timescale: 14-Aug-2024 (6 Months)
T 02	European lime (Tilia x europaea)	Target - dwelling. Target - footpath. Target - overhead wires. Target - road. Target - fence	Height (m): 16 DBH (cm): 43 Life Stage: Early Mature Life Exp.: 30+ Years	Some dead wood over footpath & highway. Lower branches to East beginning to interfere with property roof. Of otherwise fair overall condition. Risk Category = Medium	Fair	Remove 2 x lower branches less than 120mm diameter to East over property roof. Remove dead wood. Timescale: 14-Aug-2024 (6 Months)
T 03	European lime (Tilia x europaea)	Target - dwelling. Target - footpath. Target - overhead wires. Target - road. Target - fence	Height (m): 16 DBH (cm): 39 Life Stage: Early Mature Life Exp.: 30+ Years	Some dead wood throughout crown, of otherwise fair overall condition. Risk Category = Medium	Fair	Remove dead wood Timescale: 14-Aug-2024 (6 Months)
T 04	European lime (Tilia x europaea)	Target - dwelling. Target - footpath. Target - overhead wires. Target - road. Target - fence	Height (m): 16 DBH (cm): 43 Life Stage: Early Mature Life Exp.: 30+ Years	2 x lower branches beginning to interfere with property roof, removal of these will help balance the overall appearance of the tree. Some dead wood within crown. Of otherwise fair overall condition. Risk Category = Medium	Fair	Remove 2 x lower branches less than 160mm diameter to East over property roof. Remove dead wood. Timescale: 14-Aug-2024 (6 Months)

Ref.	Species	Description	Measurements	Survey Notes	Overall Condition	Recommendations
T 05	European lime (Tilia x europaea)	Target - dwelling. Target - footpath. Target - overhead wires. Target - road. Target - fence	Height (m): 16 DBH (cm): 41 Life Stage: Early Mature Life Exp.: 30+ Years	Open cavities on lower main stem at 1.2m to North & 2.2m to South East, but currently within safety thresholds. Some dead wood throughout crown over highway. Risk Category = Medium	Fair	Remove 1 x lower branch to West which is hanging into highway. Remove dead wood. Timescale: 14-Aug-2024 (6 Months)
T 06	European lime (Tilia x europaea)	Target - dwelling. Target - fence	Height (m): 17 DBH (cm): 57 Life Stage: Early Mature Life Exp.: 30+ Years	Twin stem from approx 4m. Tree heavily covered in lvy into from base into high crown which is preventing full survey. lvy is so dense it is at a point where it is beginning to cause issues for the trees long term health. Some branches close to interfering with the adjacent property roof. Risk Category = Medium	Fair	Remove 1 x lower branch to South to clear adjacent property roof. Remove 1 x lower branch to North to balance crown. Remove lvy from tree. Timescale: 14-Feb-2025 (1 Year)
T 07	European lime (Tilia x europaea)	Target - Dwellings	Height (m): 17 DBH (cm): 38 Life Stage: Early Mature Life Exp.: 30+ Years	Of fair overall condition but unbalanced crown with branches encroaching upon the property and adjacent property roof. Risk Category = Medium	Fair	Remove 3 x lower branches to North to clear property roof. Remove 3 x secondary branches to clear adjacent property roof. Timescale: 14-Aug-2024 (6 Months)
T 08	European lime (Tilia x europaea)	Target - dwellings.	Height (m): 17 DBH (cm): 32 Life Stage: Early Mature Life Exp.: 30+ Years	South side of crown beginning to interfere with adjacent property to South, of otherwise fair overall condition. Risk Category = Medium	Fair	Remove 3 x branches less than 100mm diameter to South to clear property. Crown lift North side to balance via removal of approx 3 x branches less than 100mm diameter. Timescale: 14-Aug-2024 (6 Months)

Ref.	Species	Description	Measurements	Survey Notes	Overall Condition	Recommendations
T 09	European lime (<i>Tilia x europaea</i>)	Target - dwellings	Height (m): 15 DBH (cm): 30 Life Stage: Early Mature Life Exp.: 30+ Years	Branches to South & North interfering with property & adjacent property roofs. Of otherwise fair overall condition. Risk Category = Medium	Fair	Remove 3 x lower branches to North less than 150mm diameter to clear property roof. Reduce / prune back South side of crown to give 2.5m clearance from adjacent property. Timescale: 14-Aug-2024 (6 Months)
T 10	European lime (<i>Tilia x europaea</i>)	Target - dwellings Target - public footpath & highway	Height (m): 17 DBH (cm): 58 Life Stage: Early Mature Life Exp.: 30+ Years	Small open cavity on main stem at 1m from base to South, larger column type cavity within stem extending upwards in excess of 400mm. The tree is reacting well and healing over the opening but this will eventually hide a structural defect. The cavity is currently within safety thresholds but some pruning works are advised to reduce the "sail" effect of the trees crown in high winds, although the tree is in a relatively sheltered position between buildings and other trees. Some lower branches are hanging into the highway and require attention. Of otherwise fair overall condition. We would advise the cavity be monitored on a two year cycle. Risk Category = Medium.	Fair	Remove 3 x lower branches to East which hang down into highway. Remove 1 x lower branch to South & 1 x branch North to balance crown. Crown thin by 15% to reduce "sail" effect in high winds. Remove dead wood. Timescale: 14-Aug-2024 (6 Months)